



**OPEN**  
Compute Project

# OCP NIC 3.0 Design Specification

Version 0.82

Author: OCP Server Workgroup, OCP NIC subgroup

## Table of Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Overview</b>   | <b>11</b> |
| 1.1      | License   | 11        |
| 1.2      | Acknowledgements  | 12        |
| 1.3      | Background  | 13        |
| 1.4      | Overview  | 15        |
| 1.4.1    | Mechanical Form factor overview   | 15        |
| 1.4.2    | Electrical overview   | 17        |
| 1.4.2.1  | Primary Connector   | 17        |
| 1.4.2.2  | Secondary Connector   | 18        |
| 1.5      | Non-NIC Use Cases   | 18        |
| 1.6      | References  | 19        |
| 1.6.1    | Trademarks  | 20        |
| <b>2</b> | <b>Mechanical Card Form Factor</b>  | <b>21</b> |
| 2.1      | Form Factor Options   | 21        |
| 2.1.1    | Small Form Factor (SFF) Faceplate Configurations                                    | 23        |
| 2.1.2    | Large Form Factor (LFF) Faceplate Configurations                                    | 27        |
| 2.2      | Line Side I/O Implementations   | 31        |
| 2.3      | Top Level Assembly (SFF and LFF)  | 32        |
| 2.4      | Faceplate Subassembly (SFF and LFF)   | 33        |
| 2.4.1    | Faceplate Subassembly – Exploded View   | 33        |
| 2.4.2    | Faceplate Subassembly – Bill of Materials (BOM)                                     | 33        |
| 2.4.3    | SFF Generic I/O Faceplate   | 35        |
| 2.4.4    | LFF Generic I/O Faceplate   | 36        |
| 2.4.5    | Ejector Lever (SFF)   | 37        |
| 2.4.6    | Ejector Levers (LFF)  | 37        |
| 2.4.7    | Ejector Lock (SFF and LFF)  | 38        |
| 2.4.8    | Ejector Bushing (SFF and LFF)   | 38        |
| 2.4.9    | Ejector Wave Washer (SFF and LFF)   | 39        |
| 2.5      | Card Keep Out Zones   | 40        |
| 2.5.1    | SFF Keep Out Zones  | 40        |
| 2.5.2    | LFF Keep Out Zones  | 43        |
| 2.6      | Baseboard Keep Out Zones  | 45        |
| 2.7      | Insulation Requirements   | 46        |
| 2.7.1    | SFF Insulator   | 46        |
| 2.7.2    | LFF Insulator   | 47        |
| 2.8      | Critical-to-Function (CTF) Dimensions (SFF and LFF)                                 | 48        |
| 2.8.1    | CTF Tolerances  | 48        |
| 2.8.2    | SFF Pull Tab CTF Dimensions   | 48        |
| 2.8.3    | SFF OCP NIC 3.0 Card with Ejector Latch CTF Dimensions                              | 50        |
| 2.8.4    | SFF OCP NIC 3.0 Baseboard CTF Dimensions  | 51        |
| 2.8.5    | LFF OCP NIC 3.0 Card CTF Dimensions   | 53        |
| 2.8.6    | LFF OCP NIC 3.0 Baseboard CTF Dimensions  | 54        |
| 2.9      | Labeling Requirements   | 56        |
| 2.9.1    | General Guidelines for Label Contents   | 56        |
| 2.9.2    | MAC Address Labeling Requirements   | 57        |
| 2.9.2.1  | MAC Address Label Example 1 – Quad Port with Single Host, Single Managed Controller | 57        |
| 2.9.2.2  | MAC Address Label Example 2 – Octal Port with Single Host, Dual Managed Controllers | 58        |
| 2.9.2.3  | MAC Address Label Example 3 – Quad Port with Dual Hosts, Dual Managed Controllers   | 59        |
| 2.9.2.4  | MAC Address Label Example 4 – Single Port with Quad Host, Single Managed Controller | 59        |
| 2.10     | Mechanical CAD Package Examples   | 61        |
| <b>3</b> | <b>Electrical Interface Definition – Card Edge and Baseboard</b>                    | <b>62</b> |
| 3.1      | Card Edge Gold Finger Requirements  | 62        |
| 3.1.1    | Gold Finger Mating Sequence   | 63        |
| 3.2      | Baseboard Connector Requirements  | 67        |
| 3.2.1    | Right Angle Connector   | 67        |
| 3.2.2    | Right Angle Offset  | 68        |
| 3.2.3    | Straddle Mount Connector  | 68        |

|          |  |            |
|----------|--|------------|
| 3.2.4    | Straddle Mount Offset and PCB Thickness Options .....  | 70         |
| 3.2.5    | LFF Connector Locations .....  | 71         |
| 3.3      | Pin Definition .....   | 71         |
| 3.3.1    | Primary Connector .....  | 72         |
| 3.3.2    | Secondary Connector .....  | 74         |
| 3.4      | Signal Descriptions .....  | 75         |
| 3.4.1    | PCIe Interface Pins .....  | 75         |
| 3.4.2    | PCIe Present and Bifurcation Control Pins .....  | 80         |
| 3.4.3    | SMBus Interface Pins .....   | 83         |
| 3.4.4    | NC-SI Over RBT Interface Pins .....  | 84         |
| 3.4.5    | Scan Chain Pins .....  | 91         |
| 3.4.6    | Power Supply Pins .....  | 97         |
| 3.4.7    | USB 2.0 (A68/A69) – Primary Connector Only .....   | 100        |
| 3.4.8    | UART (A68/A69) – Secondary Connector Only .....  | 102        |
| 3.4.9    | RFU[1:2] Pins .....  | 104        |
| 3.5      | PCIe Bifurcation Mechanism .....   | 105        |
| 3.5.1    | PCIe OCP NIC 3.0 Card to Baseboard Bifurcation Configuration (PRSNTA#, PRSNTB[3:0]#) .....         | 105        |
| 3.5.2    | PCIe Baseboard to OCP NIC 3.0 Card Bifurcation Configuration (BIF[2:0]#) .....                     | 105        |
| 3.5.3    | PCIe Bifurcation Decoder .....   | 106        |
| 3.5.4    | Bifurcation Detection Flow .....   | 108        |
| 3.5.5    | PCIe Bifurcation Examples .....  | 109        |
| 3.5.5.1  | Single Host (1 x16) Baseboard with a 1 x16 OCP NIC 3.0 Card (Single Controller) .....              | 109        |
| 3.5.5.2  | Single Host (2 x8) Baseboard with a 2 x8 OCP NIC 3.0 Card (Dual Controllers) .....                 | 110        |
| 3.5.5.3  | Quad Host (4 x4) Baseboard with a 4 x4 OCP NIC 3.0 Card (Single Controller) .....                  | 111        |
| 3.5.5.4  | Quad Host (4 x4) Baseboard with a 4 x4 OCP NIC 3.0 Card (Quad Controllers) .....                   | 112        |
| 3.5.5.5  | Single Host (1 x16, no Bifurcation) Baseboard with a 2 x8 OCP NIC 3.0 Card (Dual Controller) ..... | 113        |
| 3.6      | PCIe Clocking Topology .....   | 114        |
| 3.7      | PCIe Bifurcation Results and REFCLK Mapping .....  | 115        |
| 3.8      | Port Numbering and LED Implementations .....   | 125        |
| 3.8.1    | OCP NIC 3.0 Port Naming and Port Numbering .....   | 125        |
| 3.8.2    | OCP NIC 3.0 Card LED Configuration .....   | 125        |
| 3.8.3    | OCP NIC 3.0 Card LED Ordering .....  | 127        |
| 3.8.4    | Baseboard LEDs Configuration over the Scan Chain .....   | 127        |
| 3.9      | Power Capacity and Power Delivery .....  | 128        |
| 3.9.1    | NIC Power Off .....  | 129        |
| 3.9.2    | ID Mode .....  | 129        |
| 3.9.3    | Aux Power Mode (S5) .....  | 129        |
| 3.9.4    | Main Power Mode (S0) .....   | 129        |
| 3.10     | Power Supply Rail Requirements and Slot Power Envelopes .....                                      | 130        |
| 3.11     | Hot Swap Considerations for +12V_EDGE and +3.3V_EDGE Rails .....                                   | 131        |
| 3.12     | Power Sequence Timing Requirements .....   | 132        |
| 3.13     | Digital I/O Specifications .....   | 134        |
| <b>4</b> | <b>Management and Pre-OS Requirements .....</b>  | <b>135</b> |
| 4.1      | Sideband Management Interface and Transport .....  | 135        |
| 4.2      | NC-SI Traffic .....  | 136        |
| 4.3      | Management Controller (MC) MAC Address Provisioning .....  | 136        |
| 4.4      | Temperature Reporting .....  | 138        |
| 4.5      | Power Consumption Reporting .....  | 139        |
| 4.6      | Pluggable Transceiver Module Status and Temperature Reporting .....                                | 140        |
| 4.7      | Management and Pre-OS Firmware Inventory and Update .....  | 140        |
| 4.7.1    | Secure Firmware .....  | 140        |
| 4.7.2    | Firmware Inventory .....   | 141        |
| 4.7.3    | Firmware Inventory and Update in Multi-Host Environments .....                                     | 141        |
| 4.8      | NC-SI Package Addressing and Hardware Arbitration Requirements .....                               | 141        |
| 4.8.1    | NC-SI over RBT Package Addressing .....  | 141        |
| 4.8.2    | Arbitration Ring Connections .....   | 142        |
| 4.9      | SMBus 2.0 Addressing Requirements .....  | 142        |
| 4.9.1    | SMBus Address Map .....  | 142        |

|          |   |            |
|----------|---|------------|
| 4.10     | FRU EEPROM.....   | 143        |
| 4.10.1   | FRU EEPROM Address, Size and Availability .....                     | 143        |
| 4.10.2   | FRU EEPROM Content Requirements .....                               | 143        |
| 4.10.3   | FRU Template .....  | 147        |
| <b>5</b> | <b>Routing Guidelines and Signal Integrity Considerations .....</b> | <b>147</b> |
| 5.1      | NC-SI Over RBT.....   | 147        |
| 5.1.1.1  | Timing Budget .....   | 147        |
| 5.2      | SMBus 2.0 .....   | 147        |
| 5.3      | PCIe.....   | 147        |
| 5.3.1    | Background .....  | 148        |
| 5.3.2    | Channel Requirements .....  | 148        |
| 5.3.2.1  | REFCLK requirements .....   | 148        |
| 5.3.2.2  | Add-in Card Electrical Budgets .....                                | 148        |
| 5.3.2.3  | Baseboard Channel Budget .....                                      | 148        |
| 5.3.2.4  | SFF-TA-1002 Connector Channel Budget .....                          | 148        |
| 5.3.2.5  | Differential Impedance .....  | 148        |
| 5.3.3    | Test Fixtures.....  | 149        |
| 5.3.3.1  | Load Board .....  | 149        |
| 5.3.3.2  | Baseboard .....   | 150        |
| 5.3.4    | Test Methodology.....   | 150        |
| 5.3.5    | Impedance (Informative) .....                                       | 150        |
| 5.3.5.1  | Add-in Card PCB .....   | 150        |
| 5.3.5.2  | Baseboard PCB .....   | 150        |
| <b>6</b> | <b>Thermal and Environmental .....</b>                              | <b>151</b> |
| 6.1      | Airflow Direction.....  | 151        |
| 6.1.1    | Hot Aisle Cooling.....  | 151        |
| 6.1.2    | Cold Aisle Cooling .....  | 152        |
| 6.2      | Thermal Design Guidelines .....                                     | 153        |
| 6.2.1    | SFF Card ASIC Cooling – Hot Aisle .....                             | 153        |
| 6.2.2    | LFF Card ASIC Cooling – Hot Aisle .....                             | 156        |
| 6.2.3    | SFF Card ASIC Cooling – Cold Aisle .....                            | 158        |
| 6.2.4    | LFF Card ASIC Cooling – Cold Aisle .....                            | 161        |
| 6.3      | Thermal Simulation (CFD) Modeling.....                              | 163        |
| 6.4      | Thermal Test Fixture .....  | 163        |
| 6.4.1    | Test Fixture for SFF Card .....                                     | 164        |
| 6.4.2    | Test Fixture for LFF Card .....                                     | 165        |
| 6.4.3    | Test Fixture Airflow Direction .....                                | 167        |
| 6.4.4    | Thermal Test Fixture Candlestick Sensors.....                       | 167        |
| 6.5      | Card Sensor Requirements .....                                      | 169        |
| 6.6      | Card Cooling Tiers .....  | 169        |
| 6.6.1    | Hot Aisle Cooling Tiers .....                                       | 169        |
| 6.6.2    | Cold Aisle Cooling Tiers.....                                       | 169        |
| 6.7      | Non-Operational Shock & Vibration Testing.....                      | 170        |
| 6.7.1    | Shock & Vibe Test Fixture .....                                     | 170        |
| 6.7.2    | Test Procedure.....   | 170        |
| 6.8      | Dye and Pull Test Method.....                                       | 171        |
| 6.9      | Gold Finger Plating Requirements .....                              | 173        |
| 6.9.1    | Host Side Gold Finger Plating Requirements .....                    | 173        |
| 6.9.2    | Line Side Gold Finger Durability Requirements .....                 | 173        |
| <b>7</b> | <b>Regulatory.....</b>  | <b>174</b> |
| 7.1      | Required Compliance.....  | 174        |
| 7.1.1    | Required Environmental Compliance .....                             | 174        |
| 7.1.2    | Required EMC Compliance .....                                       | 174        |
| 7.1.3    | Required Product Safety Compliance .....                            | 175        |
| 7.1.4    | Required Immunity (ESD) Compliance.....                             | 175        |
| 7.2      | Recommended Compliance .....  | 175        |
| 7.2.1    | Recommended Environmental Compliance.....                           | 175        |
| 7.2.2    | Recommended EMC Compliance.....                                     | 176        |

8 Revision History .....177

## List of Figures

|  |    |
|--|----|
| Figure 1: Representative SFF OCP NIC 3.0 Card with Dual QSFP Ports .....                             | 13 |
| Figure 2: Representative LFF OCP NIC 3.0 Card with Dual QSFP Ports and on-board DRAM .....           | 14 |
| Figure 3: Small and Large Form-Factors (not to scale).....   | 15 |
| Figure 4: Primary Connector (4C+) and Secondary Connector (4C) (LFF) OCP NIC 3.0 Cards .....         | 21 |
| Figure 5: Primary Connector (4C+) Only (LFF) OCP NIC 3.0 Cards.....                                  | 21 |
| Figure 6: Primary Connector (4C+) with 4C and 2C (SFF) OCP NIC 3.0 Cards .....                       | 22 |
| Figure 7: SFF NIC Configuration Views .....  | 24 |
| Figure 8: SFF NIC Line Side 3D Views .....   | 25 |
| Figure 9: SFF NIC Chassis Mounted 3D Views .....   | 26 |
| Figure 10: LFF NIC Configuration Views .....   | 28 |
| Figure 11: LFF NIC Line Side 3D Views .....  | 29 |
| Figure 12: LFF NIC Chassis Mounted 3D Views .....  | 30 |
| Figure 13: PBA Exploded Views (SFF and LFF).....   | 32 |
| Figure 14: Faceplate Assembly Exploded Views (SFF and LFF).....                                      | 33 |
| Figure 15: SFF Generic I/O Faceplate with Pulltab Version (2D View) .....                            | 35 |
| Figure 16: SFF Generic I/O Faceplate – Ejector Version (2D View) .....                               | 35 |
| Figure 17: SFF Generic I/O Faceplate – Internal Lock Version (2D View).....                          | 36 |
| Figure 18: LFF Generic I/O Faceplate – Dual Ejector Version (2D View) .....                          | 36 |
| Figure 19: SFF I/O Faceplate – Ejector Lever (2D View) .....   | 37 |
| Figure 20: LFF I/O Faceplate – Ejector Lever (2D View) .....   | 37 |
| Figure 21: Ejector Lock.....   | 38 |
| Figure 22: Ejector Bushing .....   | 38 |
| Figure 23: Wave Washer.....  | 39 |
| Figure 24: SFF Keep Out Zone – Top View .....  | 40 |
| Figure 25: SFF Keep Out Zone – Top View – Detail A .....   | 40 |
| Figure 26: SFF Keep Out Zone – Bottom View .....   | 41 |
| Figure 27: SFF Keep Out Zone – Side View.....  | 41 |
| Figure 28: SFF Keep Out Zone – Side View – Detail D .....  | 42 |
| Figure 29: LFF Keep Out Zone – Top View .....  | 43 |
| Figure 30: LFF Keep Out Zone – Top View – Detail A .....   | 44 |
| Figure 31: LFF Keep Out Zone – Bottom View .....   | 44 |
| Figure 32: LFF Keep Out Zone – Side View.....  | 45 |
| Figure 33: LFF Keep Out Zone – Side View – Detail D .....  | 45 |
| Figure 34: SFF Bottom Side Insulator (3D View) .....   | 46 |
| Figure 35: SFF Bottom Side Insulator (Top and Side View) .....                                       | 46 |
| Figure 36: LFF Bottom Side Insulator (3D View) .....   | 47 |
| Figure 37: LFF Bottom Side Insulator (Top and Side View) .....                                       | 47 |
| Figure 38: SFF OCP NIC 3.0 Card with Pull Tab CTF Dimensions (Top View) .....                        | 48 |
| Figure 39: SFF OCP NIC 3.0 Card with Pull Tab CTF Dimensions (Front View).....                       | 49 |
| Figure 40: SFF OCP NIC 3.0 Card with Pull Tab CTF Dimensions (Side View) .....                       | 49 |
| Figure 41: SFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Top View).....                          | 50 |
| Figure 42: SFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Front View) .....                       | 50 |
| Figure 43: SFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Side View) .....                        | 50 |
| Figure 44: SFF Baseboard Chassis CTF Dimensions (Rear View) .....                                    | 51 |
| Figure 45: SFF Baseboard Chassis to Card Thumb Screw CTF Dimensions (Side View).....                 | 51 |
| Figure 46: SFF Baseboard Chassis to Ejector lever Card CTF Dimensions (Side View) .....              | 52 |
| Figure 47: SFF Baseboard Chassis CTF Dimensions (Rear Rail Guide View) .....                         | 52 |
| Figure 48: SFF Baseboard Chassis CTF Dimensions (Rail Guide Detail) – Detail C.....                  | 52 |
| Figure 49: LFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Top View).....                          | 53 |
| Figure 50: LFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Front View) .....                       | 53 |
| Figure 51: LFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Side View) .....                        | 54 |
| Figure 52: LFF Baseboard Chassis CTF Dimensions (Rear View).....                                     | 54 |
| Figure 53: LFF Baseboard Chassis CTF Dimensions (Side View) .....                                    | 55 |
| Figure 54: LFF Baseboard Chassis CTF Dimensions (Rail Guide View).....                               | 55 |
| Figure 55: LFF Baseboard Chassis CTF Dimensions (Rail Guide – Detail C) .....                        | 55 |
| Figure 56: SFF Label Area Example .....  | 56 |
| Figure 57: MAC Address Label Example 1 – Quad Port with Single Host, Single Managed Controller ..... | 58 |

|   |     |
|---|-----|
| Figure 58: MAC Address Label Example 2 – Octal Port with Single Host, Dual Managed Controller .....       | 59  |
| Figure 59: MAC Address Label Example 3 – Quad Port with Dual Hosts, Dual Managed Controllers .....        | 59  |
| Figure 60: MAC Address Label Example 4 – Single Port with Quad Host, Single Managed Controller .....      | 60  |
| Figure 61: SFF Primary Connector Gold Finger Dimensions – x16 – Top Side (“B” Pins).....                  | 62  |
| Figure 62: LFF Gold Finger Dimensions – x32 – Top Side (“B” Pins).....                                    | 63  |
| Figure 63: LFF Gold Finger Dimensions – x32 – Bottom Side (“A” Pins).....                                 | 63  |
| Figure 64: 168-pin Base Board Primary Connector – Right Angle.....  | 67  |
| Figure 65: 140-pin Base Board Secondary Connector – Right Angle.....                                      | 68  |
| Figure 66: OCP NIC 3.0 Card and Host Offset for Right Angle Connectors.....                               | 68  |
| Figure 67: 168-pin Base Board Primary Connector – Straddle Mount .....                                    | 69  |
| Figure 68: 140-pin Base Board Secondary Connector – Straddle Mount.....                                   | 69  |
| Figure 69: OCP NIC 3.0 Card and Baseboard PCB Thickness Options for Straddle Mount Connectors.....        | 70  |
| Figure 70: 0mm Offset (Coplanar) for 0.062” Thick Baseboards.....   | 70  |
| Figure 71: 0.3mm Offset for 0.076” Thick Baseboards .....   | 71  |
| Figure 72: Primary and Secondary Connector Locations for LFF Support with Right Angle Connectors .....    | 71  |
| Figure 73: Primary and Secondary Connector Locations for LFF Support with Straddle Mount Connectors ..... | 71  |
| Figure 74: PCIe Present and Bifurcation Control Pins (Baseboard Controlled BIF[0:2]#).....                | 82  |
| Figure 75: PCIe Present and Bifurcation Control Pins (Static BIF[0:2]#).....                              | 82  |
| Figure 76: Example SMBus Connections.....   | 84  |
| Figure 77: NC-SI Over RBT Connection Example – Single Primary Connector.....                              | 89  |
| Figure 78: NC-SI Over RBT Connection Example – Dual Primary Connectors .....                              | 90  |
| Figure 79: Example Scan Chain Timing Diagram .....  | 92  |
| Figure 80: Scan Chain Connection Example .....  | 96  |
| Figure 81: Example Power Supply Topology .....  | 100 |
| Figure 82: USB 2.0 Connection Example – Basic Connectivity .....  | 101 |
| Figure 83: USB 2.0 Connection Example – USB-Serial / USB-JTAG Connectivity .....                          | 101 |
| Figure 84: UART Connection Example .....  | 103 |
| Figure 85: Single Host (1 x16) and 1 x16 OCP NIC 3.0 Card (Single Controller).....                        | 109 |
| Figure 86: Single Host (2 x8) and 2 x8 OCP NIC 3.0 Card (Dual Controllers) .....                          | 110 |
| Figure 87: Quad Hosts (4 x4) and 4 x4 OCP NIC 3.0 Card (Single Controller) .....                          | 111 |
| Figure 88: Quad Hosts (4 x4) and 4 x4 OCP NIC 3.0 Card (Quad Controllers) .....                           | 112 |
| Figure 89: Single Host with no Bifurcation (1 x16) and 2 x8 OCP NIC 3.0 Card (Dual Controllers).....      | 113 |
| Figure 90: PCIe Interface Connections for 1 x16 and 2 x8 OCP NIC 3.0 Cards .....                          | 114 |
| Figure 91: PCIe Interface Connections for a 4 x4 OCP NIC 3.0 Card.....                                    | 115 |
| Figure 92: Port and LED Ordering – Example SFF Link/Activity and Speed LED Placement .....                | 127 |
| Figure 93: Baseboard Power States .....   | 128 |
| Figure 94: Power-Up Sequencing.....   | 132 |
| Figure 95: Power-Down Sequencing .....  | 133 |
| Figure 96: PCIe Load Board Test Fixture for OCP NIC 3.0 SFF .....   | 149 |
| Figure 97: PCIe Base Board Test Fixture for OCP NIC 3.0 SFF .....   | 150 |
| Figure 98: Airflow Direction for Hot Aisle Cooling (SFF and LFF) .....                                    | 151 |
| Figure 99: Airflow Direction for Cold Aisle Cooling (SFF and LFF) .....                                   | 152 |
| Figure 100: ASIC Supportable Power for Hot Aisle Cooling – SFF .....                                      | 153 |
| Figure 101: OCP NIC 3.0 SFF Reference Design and CFD Geometry.....  | 154 |
| Figure 102: Server System Airflow Capability – SFF Card Hot Aisle Cooling .....                           | 155 |
| Figure 103: ASIC Supportable Power for Hot Aisle Cooling – LFF Card .....                                 | 156 |
| Figure 104: OCP NIC 3.0 LFF Reference Design and CFD Geometry.....  | 156 |
| Figure 105: Server System Airflow Capability – LFF Card Hot Aisle Cooling.....                            | 158 |
| Figure 106: ASIC Supportable Power for Cold Aisle Cooling – SFF Card.....                                 | 159 |
| Figure 107: Server System Airflow Capability – SFF Cold Aisle Cooling .....                               | 159 |
| Figure 108: ASIC Supportable Power Comparison – SFF Card .....  | 160 |
| Figure 109: ASIC Supportable Power for Cold Aisle Cooling – LFF Card.....                                 | 161 |
| Figure 110: Server System Airflow Capability – LFF Cold Aisle Cooling.....                                | 162 |
| Figure 111: ASIC Supportable Power Comparison – LFF Card.....   | 162 |
| Figure 112: SFF Thermal Test Fixture Preliminary Design.....  | 164 |
| Figure 113: SFF Thermal Test Fixture Preliminary Design – Cover Removed.....                              | 164 |
| Figure 114: SFF Card Thermal Test Fixture PCB .....   | 165 |
| Figure 115: LFF Card Thermal Test Fixture Design .....  | 165 |

Figure 116: LFF Card Thermal Test Fixture Design – Cover Removed ..... 166

Figure 117: LFF Card Thermal Test Fixture PCB ..... 166

Figure 118: Thermal Test Fixture Airflow Direction ..... 167

Figure 119: SFF Fixture, Hot Aisle Flow - Candlestick Air Velocity vs. Volume Flow ..... 168

Figure 120: LFF Fixture, Hot Aisle Flow - Candlestick Air Velocity vs. Volume Flow ..... 168

Figure 121: Dye and Pull Type Locations ..... 172

Figure 122: Dye Coverage Percentage ..... 172

## List of Tables

|  |     |
|--|-----|
| Table 1: Acknowledgements – By Company .....   | 12  |
| Table 2: OCP 3.0 Form Factor Dimensions .....  | 16  |
| Table 3: Baseboard to OCP NIC Form factor Compatibility Chart .....  | 16  |
| Table 4: Example Non-NIC Use Cases .....   | 18  |
| Table 5: OCP NIC 3.0 Card Definitions.....   | 23  |
| Table 6: OCP NIC 3.0 Line Side I/O Implementations.....  | 31  |
| Table 7: Bill of Materials for the SFF and LFF Faceplate Assembly .....  | 34  |
| Table 8: CTF Default Tolerances (SFF and LFF OCP NIC 3.0).....   | 48  |
| Table 9: MAC Address Label Example 1 – Quad Port with Single Host, Single Managed Controller.....                        | 58  |
| Table 10: MAC Address Label Example 2 – Octal Port with Single Host, Dual Managed Controller .....                       | 58  |
| Table 11: MAC Address Label Example 3 – Quad Port with Dual Hosts, Dual Managed Controller.....                          | 59  |
| Table 12: MAC Address Label Example 4 – Single Port with Quad Host, Single Managed Controller.....                       | 60  |
| Table 13: NIC Implementation Examples and 3D CAD .....   | 61  |
| Table 14: Contact Mating Positions for the Primary Connector .....   | 63  |
| Table 15: Contact Mating Positions for the Secondary Connector .....   | 65  |
| Table 16: Right Angle Connector Options.....   | 67  |
| Table 17: Straddle Mount Connector Options.....  | 68  |
| Table 18: Primary Connector Pin Definition (x16) (4C+) .....   | 72  |
| Table 19: Secondary Connector Pin Definition (x16) (4C).....   | 74  |
| Table 20: Pin Descriptions – PCIe.....   | 75  |
| Table 21: Pin Descriptions – PCIe Present and Bifurcation Control Pins.....  | 80  |
| Table 22: Pin Descriptions – SMBus.....  | 83  |
| Table 23: Pin Descriptions – NC-SI Over RBT .....  | 84  |
| Table 24: Pin Descriptions – Scan Chain .....  | 91  |
| Table 25: Pin Descriptions – Scan Chain DATA_OUT Bit Definition.....   | 93  |
| Table 26: Pin Descriptions – Scan Chain DATA_IN Bit Definition .....   | 93  |
| Table 27: Pin Descriptions – Power.....  | 97  |
| Table 28: Pin Descriptions – USB 2.0 – Primary Connector only.....   | 100 |
| Table 29: Pin Descriptions – UART – Secondary Connector Only.....  | 102 |
| Table 30: Pin Descriptions – RFU[1:2].....   | 104 |
| Table 31: PCIe Bifurcation Decoder for x16 and x8 Card Widths .....  | 107 |
| Table 32: PCIe Clock Associations .....  | 114 |
| Table 33: Bifurcation for Single Host, Single Socket and Single Upstream Link (BIF[2:0]#=0b000) .....                    | 116 |
| Table 34: Bifurcation for Single Host, Single Socket and Single/Dual Upstream Links (BIF[2:0]#=0b000) .....              | 117 |
| Table 35: Bifurcation for Single Host, Single Socket and Single/Dual/Quad Upstream Links (BIF[2:0]#=0b000).....          | 118 |
| Table 36: Bifurcation for Single Host, Dual Sockets and Dual Upstream Links (BIF[2:0]#=0b001).....                       | 119 |
| Table 37: Bifurcation for Single Host, Quad Sockets and Quad Upstream Links (BIF[2:0]#=0b010) .....                      | 120 |
| Table 38: Bifurcation for Single Host, Quad Sockets and Quad Upstream Links – First 8 PCIe Lanes (BIF[2:0]#=0b011) ..... | 121 |
| Table 39: Bifurcation for Dual Host, Dual Sockets and Dual Upstream Links (BIF[2:0]#=0b101) .....                        | 122 |
| Table 40: Bifurcation for Quad Host, Quad Sockets and Quad Upstream Links (BIF[2:0]#=0b110).....                         | 123 |
| Table 41: Bifurcation for Quad Host, Quad Sockets and Quad Upstream Links – First 8 lanes (BIF[2:0]#=0b111) .....        | 124 |
| Table 42: OCP NIC 3.0 Card LED Configuration with Two Physical LEDs per Port .....                                       | 126 |
| Table 43: Power States .....   | 129 |
| Table 44: Baseboard Power Supply Rail Requirements – Slot Power Envelopes .....  | 130 |
| Table 45: Power Sequencing Parameters .....  | 133 |
| Table 46: Digital I/O DC specifications .....  | 134 |
| Table 47: Digital I/O AC specifications .....  | 134 |
| Table 48: OCP NIC 3.0 Management Implementation Definitions.....   | 135 |
| Table 49: Sideband Management Interface and Transport Requirements.....  | 135 |
| Table 50: NC-SI Traffic Requirements .....   | 136 |
| Table 51: MC MAC Address Provisioning Requirements .....   | 136 |
| Table 52: Temperature Reporting Requirements .....   | 138 |
| Table 53: Power Consumption Reporting Requirements.....  | 139 |
| Table 54: Pluggable Module Status Reporting Requirements .....   | 140 |
| Table 55: Management and Pre-OS Firmware Inventory and Update Requirements .....   | 140 |
| Table 56: Slot_ID[1:0] to Package ID[2:0] Mapping .....  | 141 |
| Table 57: FRU EEPROM Address Map.....  | 143 |

|  |     |
|--|-----|
| Table 58: FRU EEPROM Record – OEM Record 0xC0, Offset 0x00 .....   | 143 |
| Table 59: PCIe Electrical Budgets .....  | 148 |
| Table 60: PCIe Test Fixtures for OCP NIC 3.0 .....   | 149 |
| Table 61: Hot Aisle Air Temperature Boundary Conditions .....  | 152 |
| Table 62: Hot Aisle Airflow Boundary Conditions .....  | 152 |
| Table 63: Cold Aisle Air Temperature Boundary Conditions .....   | 152 |
| Table 64: Cold Aisle Airflow Boundary Conditions .....   | 153 |
| Table 65: Reference OCP NIC 3.0 SFF Card Geometry .....  | 154 |
| Table 66: Reference OCP NIC 3.0 LFF Card Geometry .....  | 157 |
| Table 67: Hot Aisle Card Cooling Tier Definitions (LFM) .....  | 169 |
| Table 68: Cold Aisle Card Cooling Tier Definitions (LFM) .....   | 170 |
| Table 69: Random Vibration Testing 1.88G <sub>RMS</sub> Profile .....                                    | 171 |
| Table 70: FCC Class A Radiated and Conducted Emissions Requirements Based on Geographical Location ..... | 174 |
| Table 71: Safety Requirements .....  | 175 |
| Table 72: Immunity (ESD) Requirements .....  | 175 |

# 1 Overview

## 1.1 License

As of January 23<sup>rd</sup>, 2018, the following persons or entities have made this Specification available under the Open Compute Project Hardware License (Permissive) Version 1.0 (OCPHL-P)

- OCP NIC Subgroup

An electronic copy of the OCPHL-P is available at:

<http://www.opencompute.org/assets/download/01-Contribution-Licenses/OCPHL-Permissive-v1.0.pdf>

Your use of this Specification may be subject to other third party rights. THIS SPECIFICATION IS PROVIDED "AS IS." The contributors expressly disclaim any warranties (express, implied, or otherwise), including implied warranties of merchantability, non-infringement, fitness for a particular purpose, or title, related to the Specification. The Specification implementer and user assume the entire risk as to implementing or otherwise using the Specification. IN NO EVENT WILL ANY PARTY BE LIABLE TO ANY OTHER PARTY FOR LOST PROFITS OR ANY FORM OF INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY CHARACTER FROM ANY CAUSES OF ACTION OF ANY KIND WITH RESPECT TO THIS SPECIFICATION OR ITS GOVERNING AGREEMENT, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), OR OTHERWISE, AND WHETHER OR NOT THE OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## 1.2 Acknowledgements

The OCP NIC 3.0 specification was created under a collaboration from many OCP member companies, and facilitated by the OCP NIC Subgroup under the OCP Server Workgroup.

The OCP NIC Subgroup would like to acknowledge the following member companies for their contributions to the OCP NIC 3.0 specification:

Table 1: Acknowledgements – By Company

|                                    |  |
|------------------------------------|--|
| Amphenol Corporation               | Keysight Technologies                            |
| Broadcom Limited                   | Lenovo Group Ltd                                 |
| Cavium, Inc.                       | Mellanox Technologies, Ltd                       |
| Dell, Inc.                         | Netronome Systems, Inc.                          |
| Facebook, Inc.                     | Quanta Computer Inc.                             |
| Hewlett Packard Enterprise Company | TE Connectivity Corporation                      |
| Intel Corporation                  | University of New Hampshire InterOperability Lab |

### 1.3 Background

The OCP NIC 3.0 specification is a follow-on to the OCP Mezz 2.0 rev 1.00 design specification. The OCP NIC 3.0 specification supports two basic card sizes: Small Form Factor (SFF), and Large Form Factor (LFF). The SFF allows for up to 16 PCIe lanes on the card edge while the LFF supports up to 32 PCIe lanes. Compared to the OCP Mezz Card 2.0 Design Specification, the updated OCP NIC 3.0 specification provides a broader solution space for the NIC and system vendors to support the following use case scenarios:

- NICs with a higher Thermal Design Power (TDP)
- Power delivery supports up to 80W to a single connector (SFF) card, and up to 150W to a dual connector (LFF) card
  - Note: Baseboard vendors need to evaluate if there is sufficient airflow to thermally cool the OCP NIC 3.0 card. Refer to Section 6 for additional details.
- Supports up to PCIe Gen 4 (16 GT/s) on the baseboard and OCP NIC 3.0 card
  - Connector is electrically compatible with PCIe Gen 5 (32 GT/s)
- Support for up to 32 lanes of PCIe per OCP NIC 3.0 card
- Support for single host, multi-root complex, and multi-host environments
- Supports a greater board area for more complex OCP NIC 3.0 card designs
- Support for Smart NIC implementations with on-board DRAM and accelerators
- Simplification of FRU installation and removal while reducing overall down time

A representative SFF OCP NIC 3.0 card is shown in Figure 1 and a representative LFF is shown in Figure 2.

Figure 1: Representative SFF OCP NIC 3.0 Card with Dual QSFP Ports


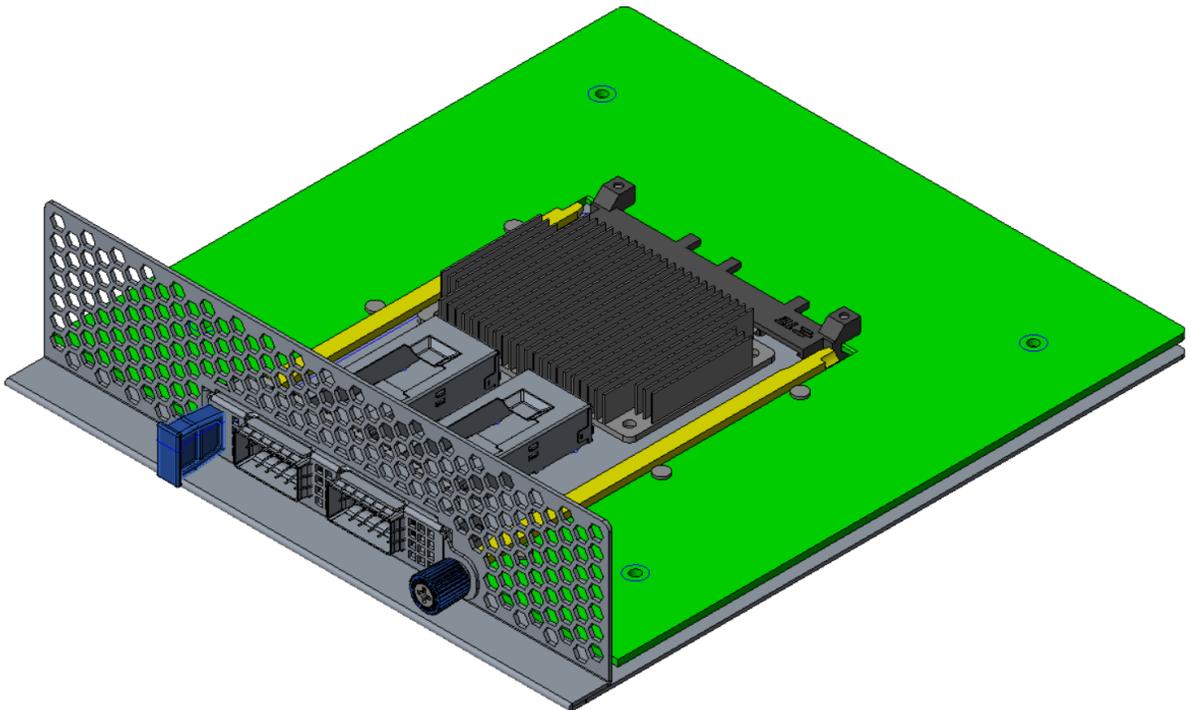


Figure 2: Representative LFF OCP NIC 3.0 Card with Dual QSFP Ports and on-board DRAM

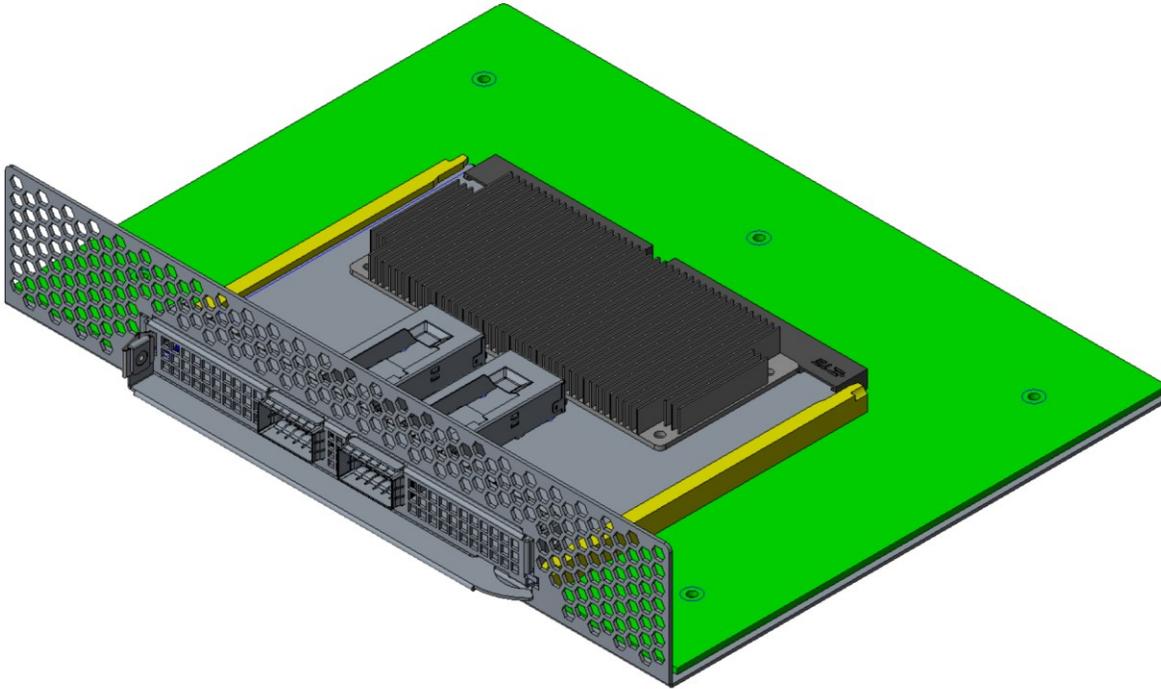

In order to achieve the features outlined in this specification, OCP NIC 3.0 compliant cards are not backwards compatible with OCP Mezz 2.0 cards.

This specification is created under OCP Server workgroup – OCP NIC subgroup. An electronic copy of this specification can be found on the Open Compute Project and the OCP Marketplace websites:

[http://www.opencompute.org/wiki/Server/Mezz#Specifications\\_and\\_Designs](http://www.opencompute.org/wiki/Server/Mezz#Specifications_and_Designs)

<https://www.opencompute.org/contributions?query=OCP%20NIC%203.0>

## 1.4 Overview


### 1.4.1 Mechanical Form factor overview

The OCP NIC 3.0 specification defines a third generation mechanical form factor that allows for interoperability between compliant baseboards and OCP NIC 3.0 cards.

OCP NIC 3.0 cards have two form factors – SFF and LFF. These cards are shown in Figure 3 below. The components shown in the figures are for illustrative purposes. The SFF card has one connector (Primary Connector) on the baseboard. The LFF card has one or two connectors (Primary Connector only or both the Primary and Secondary Connectors) on the baseboard.

Both the Primary and Secondary Connectors and card edge gold fingers are defined in and compliant to SFF-TA-1002. The Primary Connector is the “4C+” variant, the Secondary Connector is the “4C” version. On the OCP NIC 3.0 card side, the card edge is implemented with gold fingers. The SFF gold finger area only occupies the Primary Connector area for up to 16 PCIe lanes. The LFF gold finger area may occupy both the Primary and Secondary Connectors for up to 32 PCIe lanes, or optionally just the Primary Connector for up to 16 PCIe lane implementations.

Figure 3: Small and Large Form-Factors (not to scale)

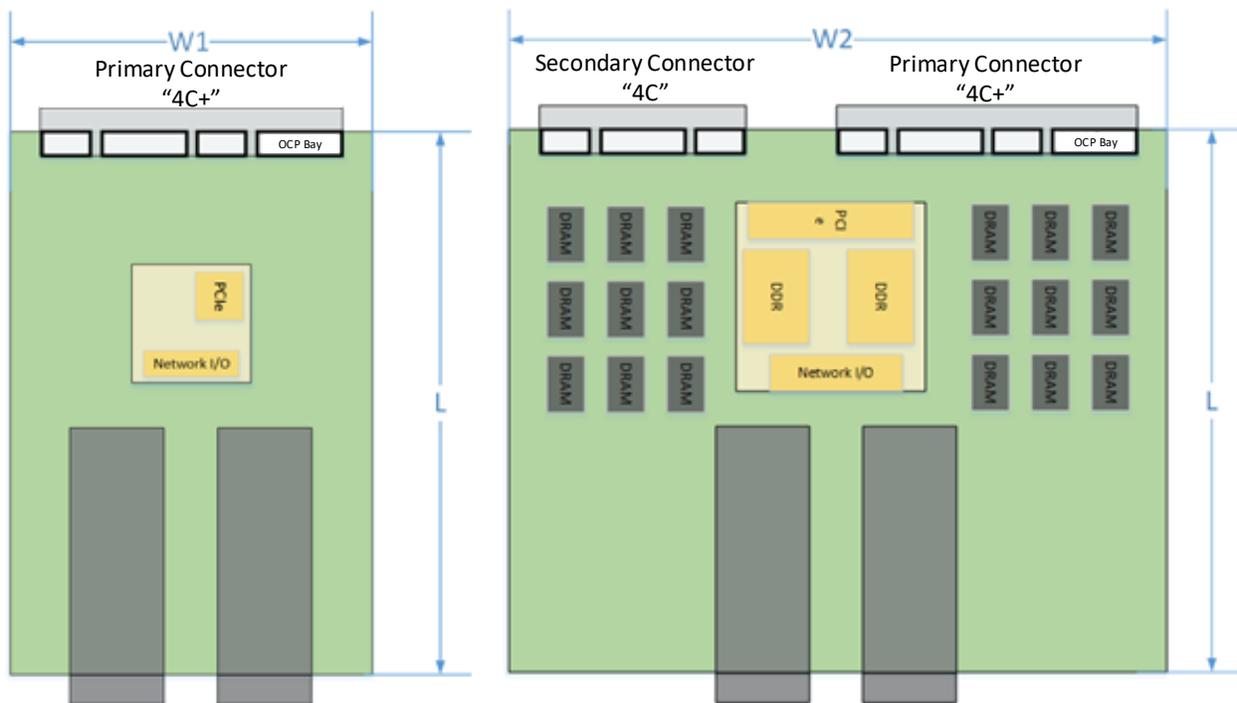

The two form factor dimensions are shown in Table 2.

Table 2: OCP 3.0 Form Factor Dimensions

| Form Factor | Width       | Depth      | Primary Connector | Secondary Connector | Typical Use Case  |
|-------------|-------------|------------|-------------------|---------------------|---|
| SFF         | W1 = 76 mm  | L = 115 mm | “4C+”<br>168 pins | N/A                 | Low profile and NIC with a similar profile as an OCP NIC 2.0 card; up to 16 PCIe lanes. |
| LFF         | W2 = 139 mm | L = 115 mm | “4C+”<br>168 pins | “4C”<br>140 pins    | Larger PCB width to support additional NICs; up to 32 PCIe lanes.                       |

The OCP NIC 3.0 design allows downward compatibility between the two card sizes. Table 3 shows the compatibility between the baseboard and NIC combinations. A SFF baseboard slot may only accept a SFF sized NIC. A LFF baseboard slot may accept a SFF or LFF NIC.

Table 3: Baseboard to OCP NIC Form factor Compatibility Chart

| Baseboard Slot Size | NIC Size / Supported PCIe Width |                     |
|---------------------|---------------------------------|---------------------|
|                     | SFF                             | LFF                 |
| SFF                 | Up to 16 PCIe lanes             | Not Supported       |
| LFF                 | Up to 16 PCIe lanes             | Up to 32 PCIe lanes |

There are two baseboard connector mounting options available for system designers: straddle mount and right angle (RA). The straddle mount connector option allows the OCP NIC and baseboard to exist in a co-planer position. To achieve this, a cutout exists on the baseboard and is defined in this specification. Alternatively, the right angle option allows the OCP NIC to be installed on top of the baseboard. A baseboard cutout is not required for the right angle connector. The right angle option allows the baseboard to use this area for additional routing or backside component placement. The straddle mount and right angle connectors are shown in Section 3.2.

For both the baseboard and OCP NIC 3.0 card, this specification defines the component and routing keep out areas. Refer to Section 2.5 for details.

Both the straddle mount and right angle implementations shall accept the same OCP NIC 3.0 card and shall be supported in the baseboard chassis regardless of the baseboard connector selection (right angle or straddle mount) so long as the baseboard slot and OCP NIC 3.0 card sizes are a supported combination as shown in Table 3.

This specification defines the form factor at the OCP NIC 3.0 card level, including the front panel, latching mechanism and card guide features.

More details about the card form-factor is shown in Section 2.

## 1.4.2 Electrical overview

This specification defines the electrical interface between baseboard and the OCP NIC 3.0 card. The electrical interface is implemented with a right angle or straddle mount connector on baseboard and gold finger on the OCP NIC 3.0 card. As previously noted in the mechanical overview, each card may implement a Primary Connector or Primary + Secondary Connector. Cards using only the Primary Connector are suitable for both the Small and Large form-factors and may support up to 16 lanes of PCIe. The Secondary Connector, when used in conjunction with the Primary Connector, allows Large form-factor implementations and may support up to 32 lanes of PCIe.

### 1.4.2.1 Primary Connector

The Primary Connector provides all OCP specific management functions as well as up to 16 lanes of PCIe between the OCP NIC and the system motherboard.

#### Management Function Overview (OCP Bay):

- DMTF DSP0222 1.1 compliant Network Controller Sideband Interface (NC-SI) RMIII Based Transport (RBT) Physical Interface
- Power management and status reporting
  - Power break for emergency power reduction
  - State change control
- Control / status serial bus
  - NIC-to-Host status
    - Port LED Link/Activity
    - Environmental Indicators
  - Host-to-NIC configuration Information
- Multi-host PCIe support signals (2x PCIe resets, 2x reference clocks)
  - The OCP bay provides PERST2#, PERST3#, REFCLK2 and REFCLK3. This enables support for up to four hosts when used in conjunction with PERST0#, PERST1#, REFCLK0 and REFCLK1 in the Primary 4C region.
- PCIe Wake signal

See Section 3.4 for a complete list of pin and function descriptions for the OCP Bay portion of the Primary Connector. The OCP Bay pins are prefixed with “OCP\_” in the pin location column.

#### Interface Overview (4C Connector):

- 16x differential transmit/receive pairs
  - Up to PCIe Gen 4 (16 GT/s) support
    - Connector is electrically compatible with PCIe Gen 5 (32 GT/s)
- 2x 100 MHz differential reference clocks
- Control signals
  - 2x PCIe Resets
  - Link Bifurcation Control
  - Card power disable/enable
- SMBus 2.0
- USB 2.0 interface

- Power
  - +12V\_EDGE
  - +3.3V\_EDGE
  - Power distribution between the aux and main power domains is up to the baseboard vendor

See Section 3.4 for a complete list of pin and function descriptions for the 4C+ connector.

#### 1.4.2.2 Secondary Connector

The Secondary Connector provides an additional 16 lanes of PCIe and their respective control signals.

##### Interface Overview (4C Connector):

- 16x differential transmit/receive pairs
  - Up to PCIe Gen 4 (16 GT/s) support
    - Connector is electrically compatible with PCIe Gen 5 (32 GT/s)
- 2x 100 MHz differential reference clocks
- Control signals
  - 2x PCIe Resets
  - Link Bifurcation Control
  - Card power disable/enable
- SMBus 2.0
- UART (transmit and receive)
- Power
  - +12V\_EDGE
  - +3.3V\_EDGE
  - Power distribution between the aux and main power domains is up to the baseboard vendor

See Section 3.4 for a complete list of pin and function descriptions for the 4C connector.

## 1.5 Non-NIC Use Cases

The OCP NIC 3.0 specification is mainly targeted for Network Interface Card applications. It is possible to use the same OCP NIC 3.0 card form-factor, baseboard interface and mechanical design to enable non-NIC use cases. These non-NIC use cases use the same baseboard/OCP NIC 3.0 card interface as defined in Section 3. The non-NIC use cases are not covered in the current revision of the OCP NIC 3.0 specification. Example non-NIC use cases implement various external I/O interfaces and are shown in Table 4.

Table 4: Example Non-NIC Use Cases

| Example Use Case        | Card External I/O Interface(s) |
|-------------------------|--------------------------------|
| PCIe Retimer Card       | PCIe                           |
| Accelerator Card        | N/A                            |
| NVMe Card               | N/A                            |
| Storage HBA / RAID Card | TBD                            |

## 1.6 References

- DMTF Standard. *DSP0222, Network Controller Sideband Interface (NC-SI) Specification*. Distributed Management Task Force (DMTF), Rev 1.1.0, September 23<sup>rd</sup>, 2015.
- DMTF Standard. *DSP0222, Network Controller Sideband Interface (NC-SI) Specification*. Distributed Management Task Force (DMTF), Rev 1.2.0, Work-In-Progress.
- DMTF Standard. *DSP0236, Management Component Transport Protocol (MCTP) Base Specification*. Distributed Management Task Force (DMTF), Rev 1.3.0, November 24<sup>th</sup>, 2016.
- DMTF Standard. *DSP0237, Management Component Transport Protocol (MCTP) SMBus/I2C Transport Binding Specification*. Distributed Management Task Force (DMTF), Rev 1.1.0, May 21<sup>st</sup>, 2017.
- DMTF Standard. *DSP0238, Management Component Transport Protocol (MCTP) PCIe VDM Transport Binding Specification*. Distributed Management Task Force (DMTF), Rev 1.0.2, December 7<sup>th</sup>, 2014.
- DMTF Standard. *DSP0239, MCTP IDs and Codes Specification*. Distributed Management Task Force (DMTF), Rev 1.5.0, December 17<sup>th</sup>, 2017.
- DMTF Standard. *DSP0240, Platform Level Data Model (PLDM) Base Specification*. Distributed Management Task Force (DMTF), Rev 1.0.0, April 23<sup>rd</sup>, 2009.
- DMTF Standard. *DSP0240, Platform Level Data Model (PLDM) over MCTP Binding Specification*. Distributed Management Task Force (DMTF), Rev 1.0.0, April 23<sup>rd</sup>, 2009.
- DMTF Standard. *DSP0245, Platform Level Data Model (PLDM) IDs and Codes Specification*. Distributed Management Task Force (DMTF), Rev 1.2.0, November 24<sup>th</sup>, 2016.
- DMTF Standard. *DSP0248, Platform Level Data Model (PLDM) for Platform Monitoring and Control Specification*. Distributed Management Task Force (DMTF), Rev 1.1.1, January 10<sup>th</sup>, 2017.
- DMTF Standard. *DSP0249, Platform Level Data Model (PLDM) State Sets Specification*. Distributed Management Task Force (DMTF), Rev 1.0.0, March 16<sup>th</sup>, 2009.
- DMTF Standard. *DSP0261, NC-SI over MCTP Binding Specification*. Distributed Management Task Force (DMTF), Rev 1.2.0, August 26<sup>th</sup>, 2017.
- EDSFF. *Enterprise and Datacenter SSD Form Factor Connector Specification*. Enterprise and Datacenter SSD Form Factor Working Group, Rev 0.9 (draft), August 2<sup>nd</sup> 2017.
- IPC. *IPC-TM-650 Test Methods Manual number 2.4.53. Dye and Pull Test Method (Formerly Known as Dye and Pry)*, Association Connecting Electronics Industries, August 2017.
- IPMI Platform Management FRU Information Storage Definition, v1.0 Document Revision 1.3, March 24<sup>th</sup>, 2015.
- National Institute of Standards and Technology (NIST). *Special Publication 800-193, Platform Firmware Resiliency Guidelines*, draft, May 2017.
- NXP Semiconductors. *I<sup>2</sup>C-bus specification and user manual*. NXP Semiconductors, Rev 6, April 4<sup>th</sup>, 2014.
- Open Compute Project. *OCP NIC Subgroup*. Online. <http://www.opencompute.org/wiki/Server/Mezz>
- PCIe Base Specification. *PCI Express Base Specification*, Revision 3.0 December 7<sup>th</sup>, 2015.
- PCIe Base Specification. *PCI Express Base Specification*, Revision 4.0 Version 1.0, October 5<sup>th</sup>, 2017.

- PCIe CEM Specification. *PCI Express Card Electromechanical Specification*, Revision 3.0, July 21<sup>st</sup>, 2013.
- PCIe CEM Specification. *PCI Express Card Electromechanical Specification*, Revision 4.0 (draft).
- SMBus Management Interface Forum. *System Management Bus (SMBus) Specification*. System Management Interface Forum, Inc, Version 2.0, August 3<sup>rd</sup>, 2000.
- SNIA. SFF-TA-1002, Specification for Protocol Agnostic Multi-Lane High Speed Connector. SNIA SFF TWG Technology Affiliate, Rev 1.1 draft, January 18<sup>th</sup>, 2018.
- UEFI Specification Version 2.5, [http://www.uefi.org/sites/default/files/resources/UEFI%202\\_5.pdf](http://www.uefi.org/sites/default/files/resources/UEFI%202_5.pdf), April 2015.
- USB Implementers Forum. *Universal Serial Bus Specification*, Revision 2.0, April 27<sup>th</sup>, 2000.

### 1.6.1 Trademarks

Names and brands may be claimed as trademarks by their respective companies.

## 2 Mechanical Card Form Factor

### 2.1 Form Factor Options

OCP NIC 3.0 provides two fundamental form factor options: a SFF (76mm x 115mm) and a LFF(139mm x 115mm).

These form factors support a Primary Connector and optionally, a Secondary Connector. The Primary Connector is defined to be a SFF-TA-1002 compliant 4C+ connector. The 4C+ connector is a 4C compliant implementation plus a 28-pin bay for OCP NIC 3.0 specific pins. The Secondary Connector is the 4C connector as defined in SFF-TA-1002. The 4C specification supports up to 32 differential pairs for a x16 PCIe connection per connector. For host platforms, the 28-pin OCP bay is required for the Primary Connector. This is also mandatory for OCP NIC 3.0 cards.

The SFF uses the Primary 4C+ connector to provide up to a x16 PCIe interface to the host. The additional 28-pin OCP bay carries sideband management interfaces as well as OCP NIC 3.0 specific control signals for multi-host PCIe support. The SFF card provides sufficient faceplate area to accommodate up to 2x QSFP modules, 4x SFP modules, or 4x RJ-45 for BASE-T operation. The SFF supports up to 80W of delivered power to the card edge. An example SFF is shown in Figure 1.

The LFF uses the Primary 4C+ connector to provide the same functionality as the SFF along with an additional Secondary 4C connector to provide up to a x32 PCIe interface. The LFF Card may utilize both the Primary and Secondary Connectors, or just the Primary Connector for lower PCIe lane count applications. Table 5 summarizes the LFF permutations. The LFF supports higher power envelopes and provides additional board area for more complex designs. The LFF supports up to 150W of delivered power to the card edge across the two connectors. An example LFF is shown in Figure 2.

For LFF Cards, implementations may use both the Primary and Secondary Connector (as shown in Figure 4), or may use the Primary Connector only (as shown in Figure 5) for the card edge gold fingers.

Figure 4: Primary Connector (4C+) and Secondary Connector (4C) (LFF) OCP NIC 3.0 Cards


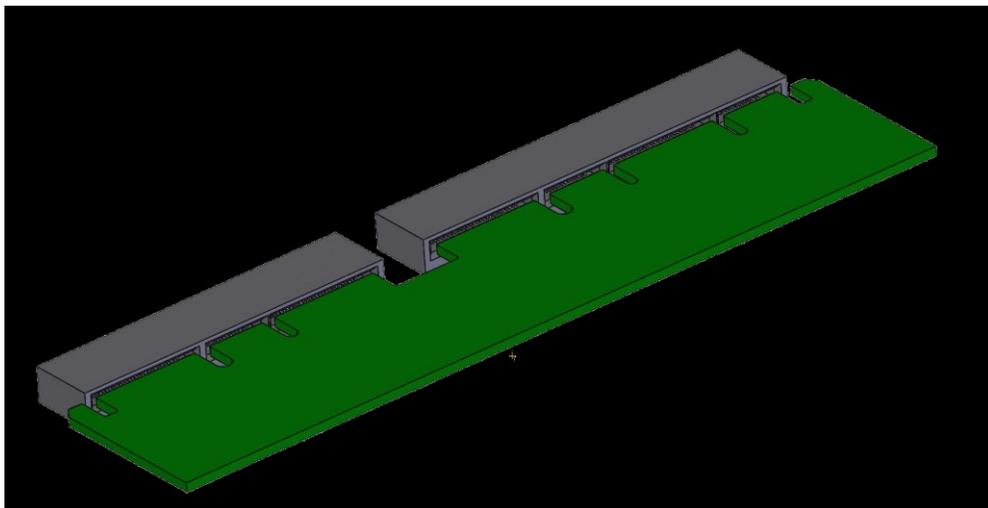


Figure 5: Primary Connector (4C+) Only (LFF) OCP NIC 3.0 Cards

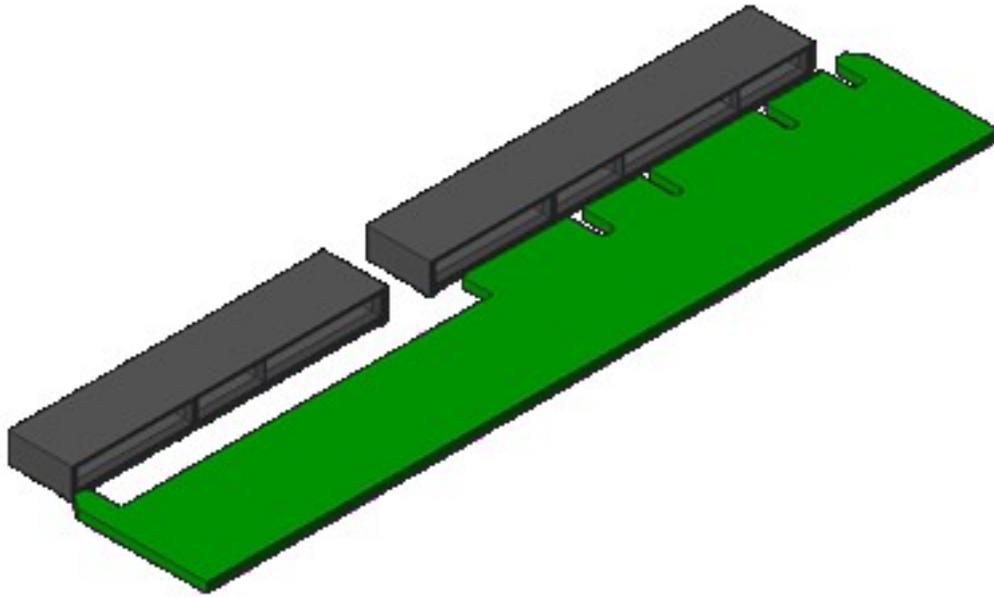

For both form-factors, an OCP NIC 3.0 card may optionally implement a subset of pins to support less than a x16 PCIe connection. This may be implemented using a 2C+ card edge per SFF-TA-1002. The baseboard Primary Connector shall use a 4C+ in all cases. Figure 6 illustrates the supported 4C+ and 2C+ card edge configurations on a 4C+ Primary Connector.

Figure 6: Primary Connector (4C+) with 4C and 2C (SFF) OCP NIC 3.0 Cards

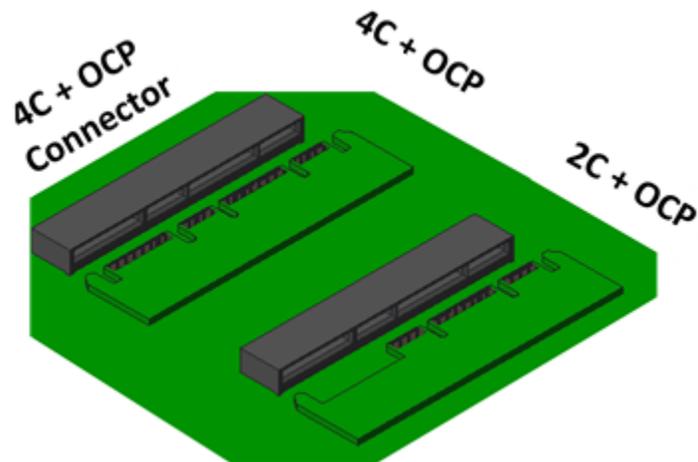


Table 5 summarizes the supported card form factors. Small form factor cards support the Primary Connector and up to 16 PCIe lanes. Large form factor cards support implementations with both the Primary and Secondary Connectors and up to 32 PCIe lanes, or a Primary Connector only implementation with up to 16 PCIe lanes.

Table 5: OCP NIC 3.0 Card Definitions

| OCP NIC 3.0 Card Size and PCIe Lane Count | Baseboard Secondary Connector (4C) | Baseboard Primary Connector (4C+) |         |
|---|------------------------------------|-----------------------------------|---------|
|   | x16 PCIe                           | x16 PCIe                          | OCP Bay |
| Small (x8)                                | Not used with SFF 2C+ Card Edge    | x8 (Lanes 7:0) PCIe               | OCP Bay |
| Small (x16)                               | Not used with SFF 4C+ Card Edge    | x16 (Lanes 15:0) PCIe             | OCP Bay |
| Large (x8)                                | Not used with LFF 2C+ Card Edge    | x8 (Lanes 7:0) PCIe               | OCP Bay |
| Large (x16)                               | Not used with LFF 4C+ Card Edge    | x16 (Lanes 15:0) PCIe             | OCP Bay |
| Large (x32)                               | x16 (Lanes 31:16) PCIe             | x16 (Lanes 15:0) PCIe             | OCP Bay |

### 2.1.1 Small Form Factor (SFF) Faceplate Configurations

The small form factor (SFF) configuration views are shown below. Three different faceplates are available for the SFF – a pull tab, ejector latch and an internal lock version are available. The same SFF OCP NIC 3.0 PBA assembly accepts all three faceplates types and may be interchanged depending on the end application. The drawings shown in Figure 7 below illustrate a representative front, side and top views of the SFF.

Where space is permitted on the faceplate, square vents sized to a maximum of 3.0mm x 3.0mm must be added to help optimize airflow while maintaining the integrity of the faceplate structure. EMI considerations should also be taken into account during the design process. Refer to the images shown in Figure 8 for example square vent configurations depending on the line side I/O connectors.

Depending on the OCP NIC 3.0 card implementation, I/O connectors may be placed anywhere within the allowable connector keep in regions as defined by the SFF PBA mechanical drawings and faceplate drawings of Section 2.5.1.


The OCP NIC 3.0 outline provides an optional feature to lock the card into the chassis. This is accomplished with two notches – one on each side of the card guide rail. A baseboard may choose to use one or both notches for the internal locking mechanism. Only one notch is required to hold the card in place. The OCP NIC 3.0 outline provides a notch location on both guide rails to provide flexible configurations to baseboard vendors. If the locking feature is implemented on the baseboard, the OCP NIC 3.0 card may only be inserted or removed after pressing on an internal locking mechanism. This retention notch is compatible with all chassis implementations. Please refer to the SFF dimensions in Section 2.5.1 for details. The internal locking mechanism is not available on LFF cards.

Note: The OCP NIC 3.0 card supplier shall add port identification on the faceplate assembly that meet their manufacturing and customer requirements.


All of the OCP NIC 3.0 CAD files are available for download and use on the OCP NIC 3.0 Wiki site: <http://www.opencompute.org/wiki/Server/Mezz>

Figure 7: SFF NIC Configuration Views


Small Form Factor (SFF) with Pull Tab

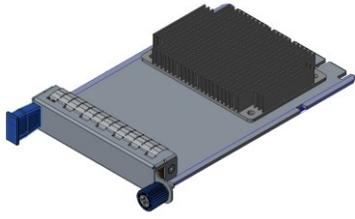


Small Form Factor (SFF) with Ejector Latch



Small Form Factor (SFF) with Internal Lock

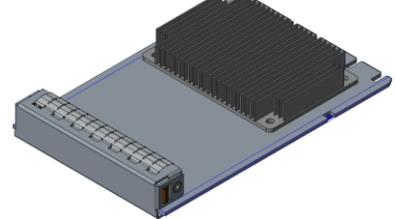

Front View



Side View



Top View

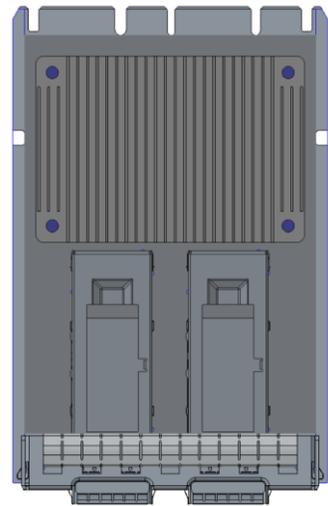
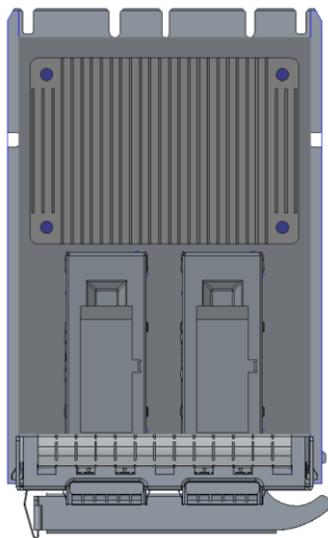
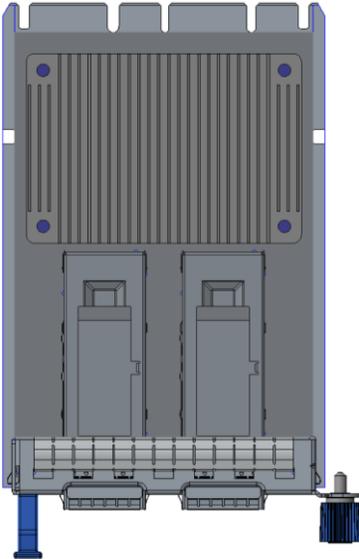


Figure 8 illustrates example SFF 3D views for the supported line side I/O implementations. The line side I/O implementations are discussed in Section 2.2.

Figure 8: SFF NIC Line Side 3D Views


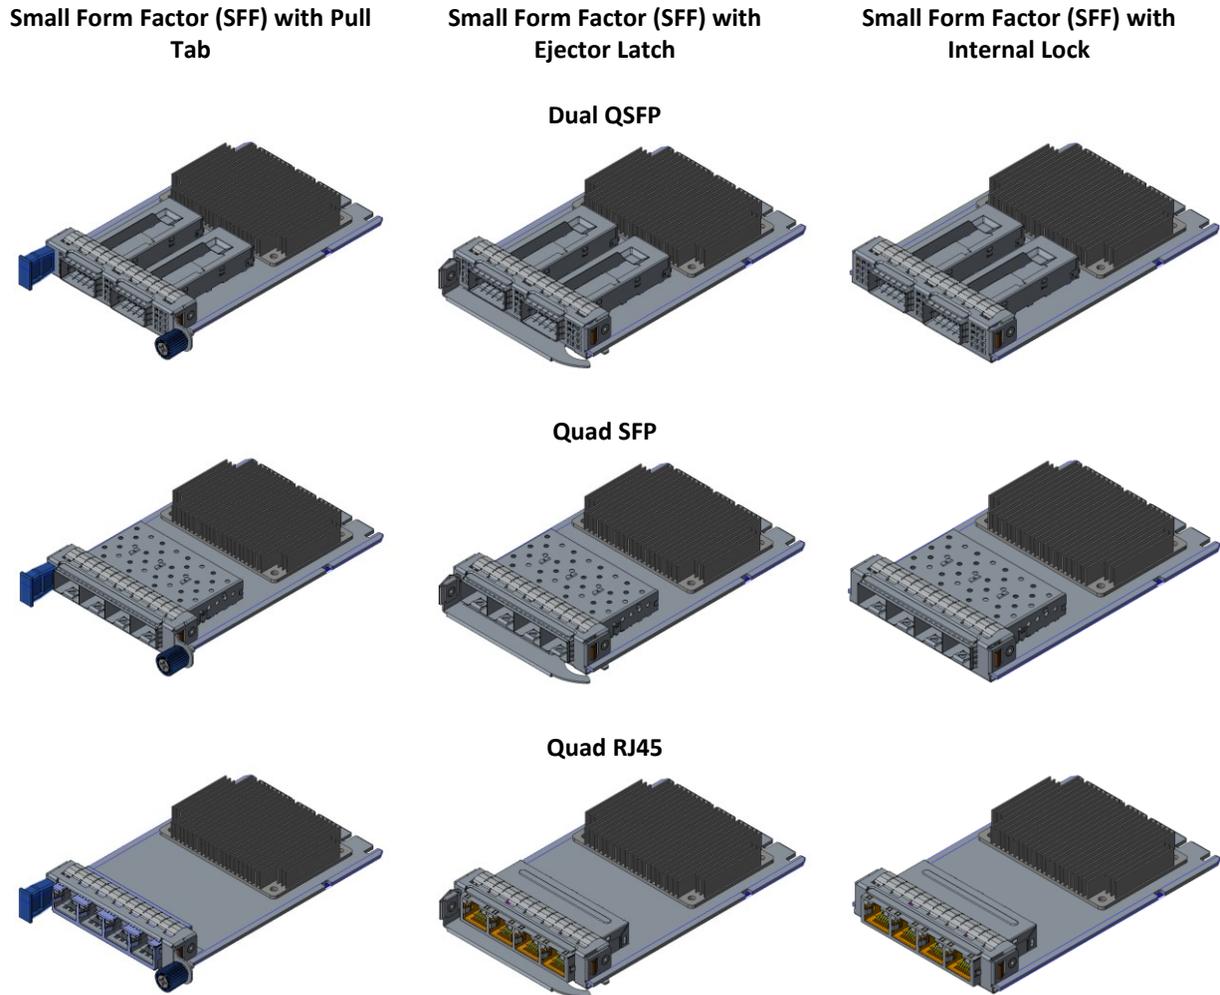


Figure 9 illustrates example SFF 3D views of the pull tab and ejector latch assemblies mounted in a chassis utilizing a straddle mount connector and a right angle connector. The baseboard connector options are discussed in Section 3.2. The SFF OCP NIC 3.0 card is identical for both chassis connector options.


As previously noted, the OCP NIC 3.0 card provides a notch on the rail edge for an internal locking mechanism to prevent card insertion and removal. The internal locking mechanism is an optional feature and is not shown in the views below.

Figure 9: SFF NIC Chassis Mounted 3D Views



Small Form Factor (SFF) with Pull Tab

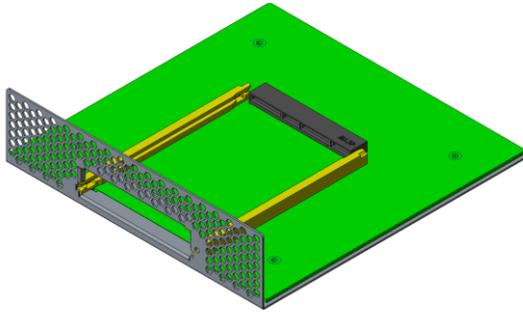



Small Form Factor (SFF) with Ejector Latch

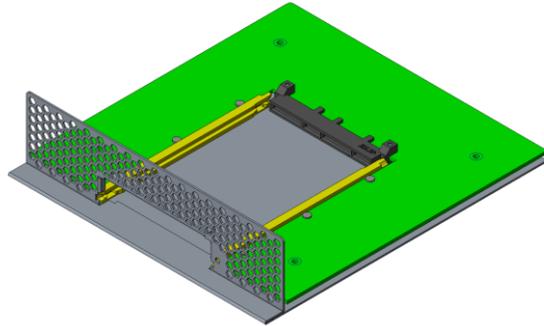



Right Angle vs Straddle Mount Chassis Configuration

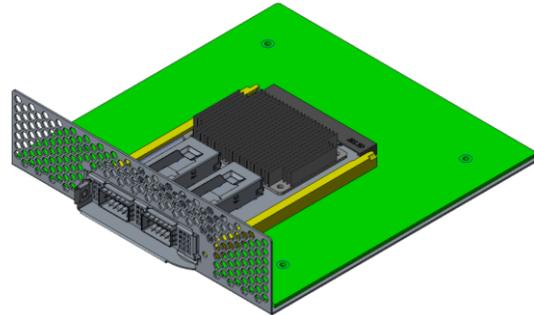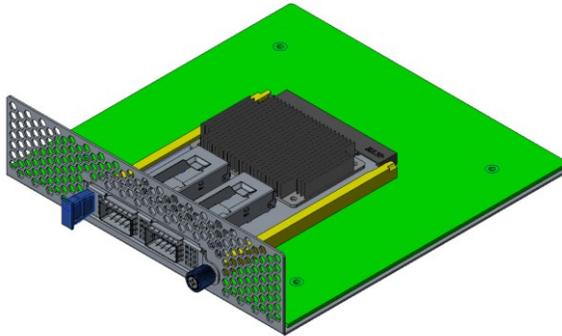

Right Angle Baseboard Connector

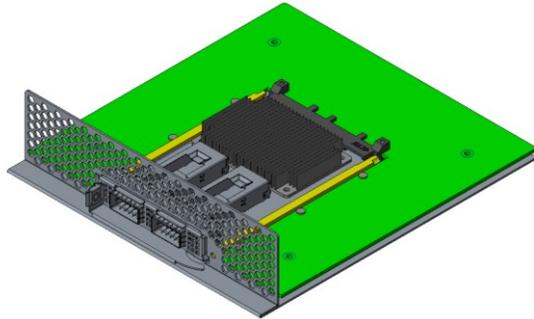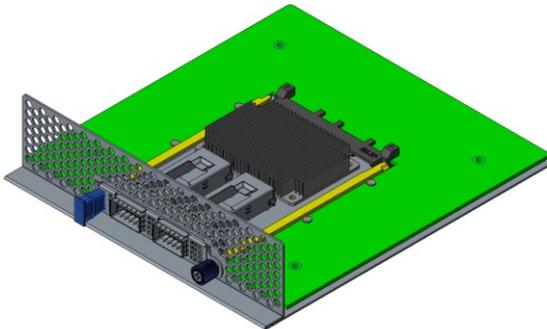

Straddle Mount Baseboard Connector

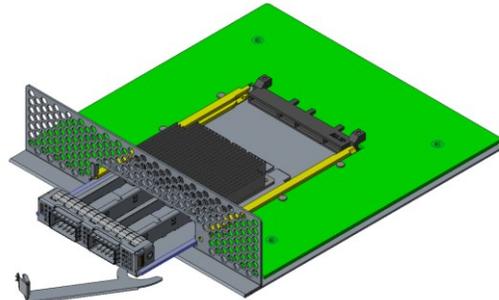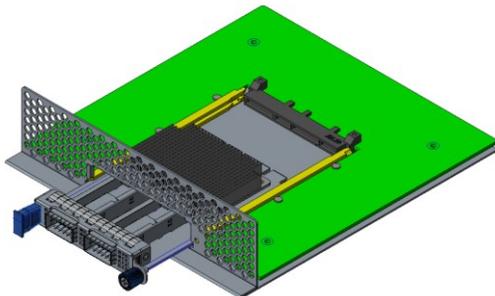

NIC Insertion / Removal (Shown with a Straddle Mount Connector)

### 2.1.2 Large Form Factor (LFF) Faceplate Configurations

The large form factor (LFF) configuration views are shown below. A single faceplate implementation is available for the LFF – with a single ejector latch. The long ejector is the default configuration, however, a short ejector version is available for non-shadowed front I/O configurations and is being considered for future development. Similar to the SFF, if additional LFF faceplate implementations become available, the same LFF OCP NIC 3.0 PBA assembly shall be able to accept new faceplate types and may be interchanged depending on the end application. The drawings shown in Figure 10 below illustrate a representative front, side and top views of the LFF.

Where space is permitted on the faceplate, square vents sized to a maximum of 3.0mm x 3.0mm must be added to help optimize airflow while maintaining the integrity of the faceplate structure. EMI considerations should also be taken into account during the design process. Refer to the images shown in Figure 11 for example square vent configurations depending on the line side I/O connectors.

Depending on the OCP NIC 3.0 card implementation, I/O connectors may be placed anywhere within the allowable connector keep in regions as defined by the PBA mechanical drawings and faceplate drawings of Section 2.5

Note: The OCP NIC 3.0 card supplier shall add port identification on the faceplate assembly that meet their manufacturing and customer requirements.

All of the OCP NIC 3.0 CAD files are available for download and use on the OCP NIC 3.0 Wiki site:  
<http://www.opencompute.org/wiki/Server/Mezz>

Figure 10: LFF NIC Configuration Views  
Large Form Factor (LFF) with Ejector Latch

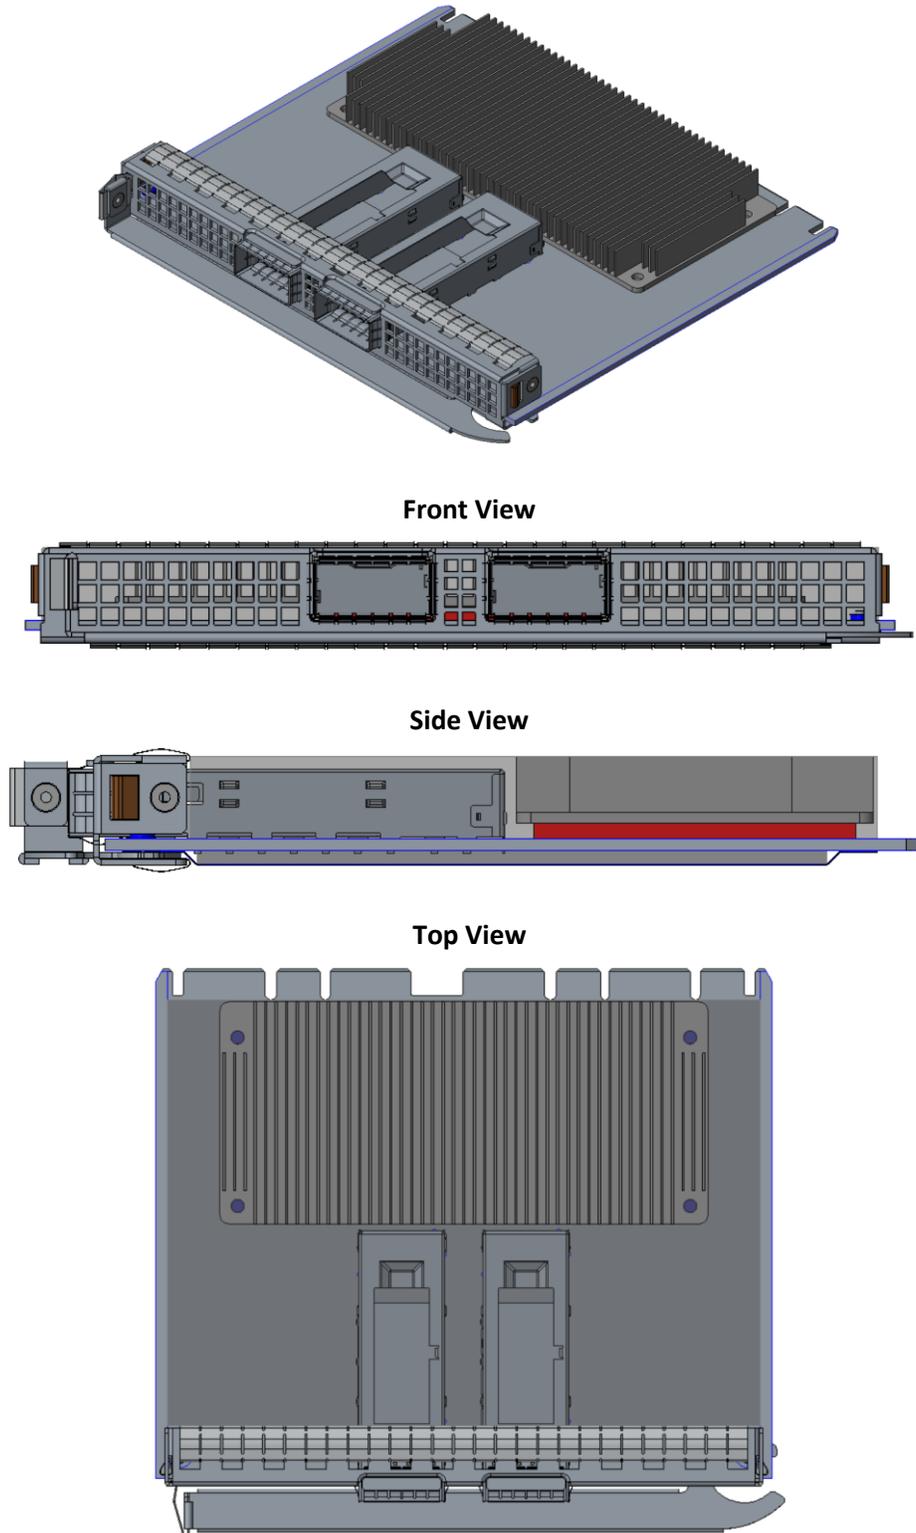


Figure 11 illustrates example LFF 3D views for the supported line side I/O implementations. The line side I/O implementations are discussed in Section 2.2.



Figure 11: LFF NIC Line Side 3D Views

Large Form Factor (LFF) with Long Ejector Latch



Large Form Factor (LFF) with Short Ejector Latch

Shadowed Configuration


Non-Shadowed Configuration

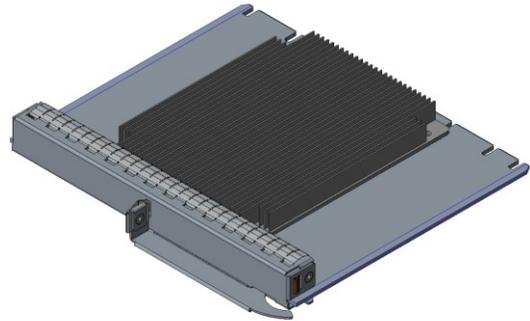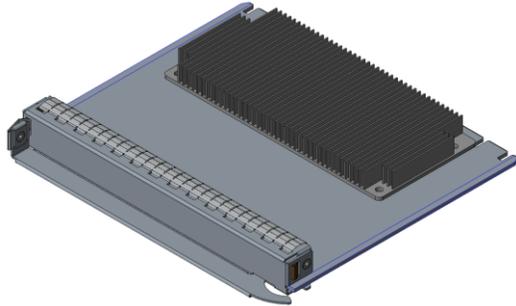

Dual QSFP

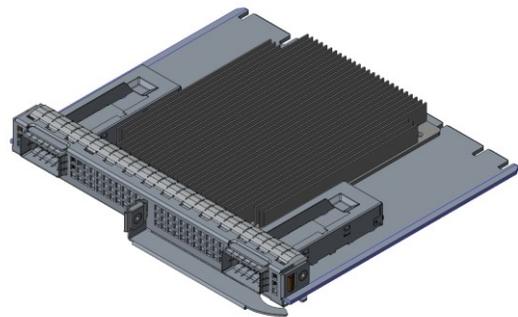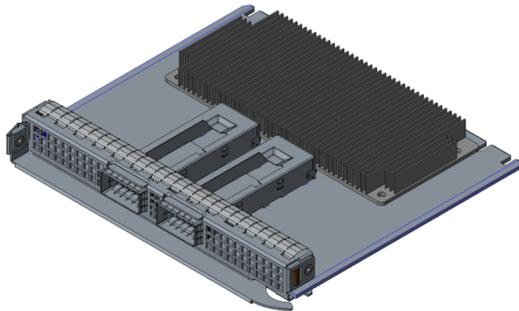


Quad SFP

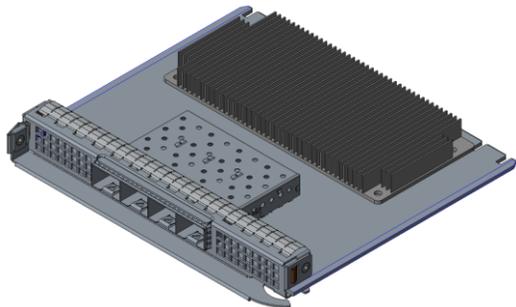

Under development.


Quad RJ45

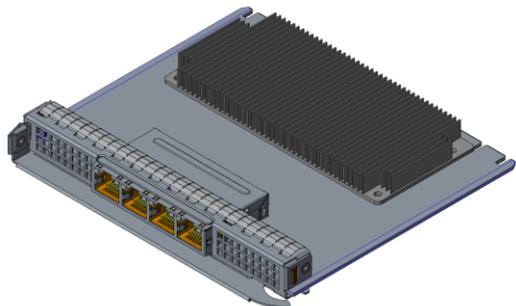


Under development.

Figure 12 illustrates example LFF 3D views of the ejector latch assembly mounted in a chassis utilizing a straddle mount connector and a right angle connector. The baseboard connector options are discussed in Section 3.2. The LFF OCP NIC 3.0 card is identical for both chassis connector options.


Figure 12: LFF NIC Chassis Mounted 3D Views

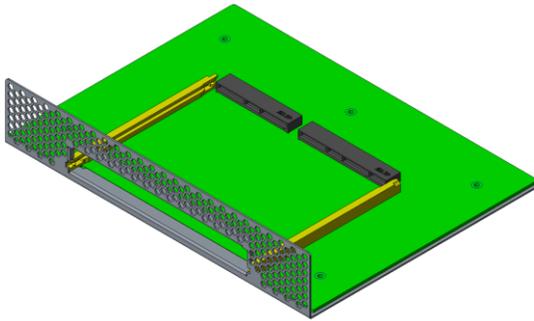


Right Angle Baseboard Connector

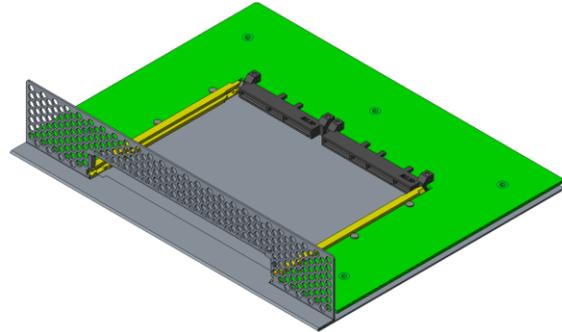


Straddle Mount Baseboard Connector

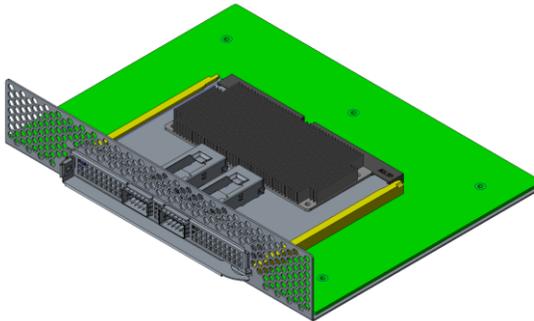

NIC Installed in Baseboard with Right Angle

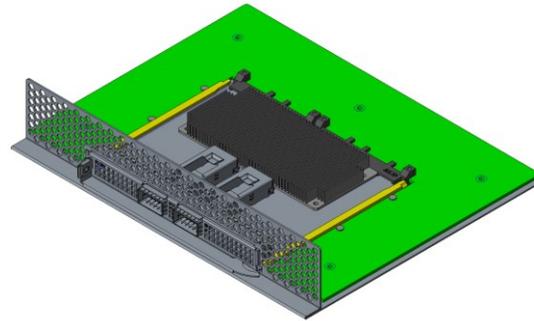

NIC Installed in Baseboard with Straddle Mount

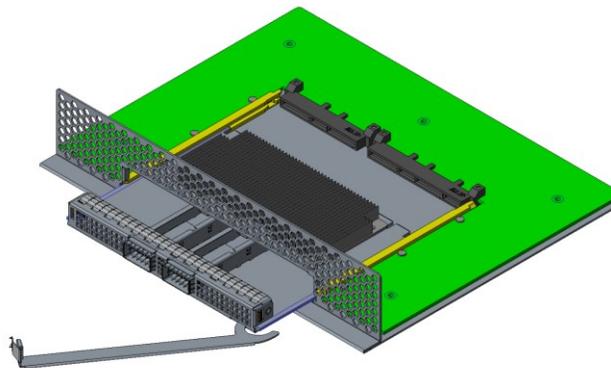

NIC Insertion / Removal (As shown with a Straddle Mount Connector)

## 2.2 Line Side I/O Implementations

At the time of this writing, the Small and Large form-factor implementations have been optimized to support the following standard line side I/O implementations:

Table 6: OCP NIC 3.0 Line Side I/O Implementations

| Form Factor | Max Topology Connector Count |
|-------------|------------------------------|
| SFF         | 2x QSFP+/QSFP28              |
| SFF         | 4x SFP28+/SFP28              |
| SFF         | 4x RJ-45                     |
| LFF         | 2x QSFP+/QSFP28              |
| LFF         | 4x SFP+/SFP28                |
| LFF         | 4x RJ-45                     |

**Note:** For brevity, references to QSFP+, and QSFP28 shall be referred to as QSFP for the remainder of this document. Similarly, references to SFP+, and SFP28 shall be referred to as SFP.

Additional combinations and connector types are permissible as I/O form-factor technologies and thermal capabilities evolve.

## 2.3 Top Level Assembly (SFF and LFF)

The images in Figure 13 illustrate the exploded top level assemblies for both the SFF and the LFF.

Figure 13: PBA Exploded Views (SFF and LFF)

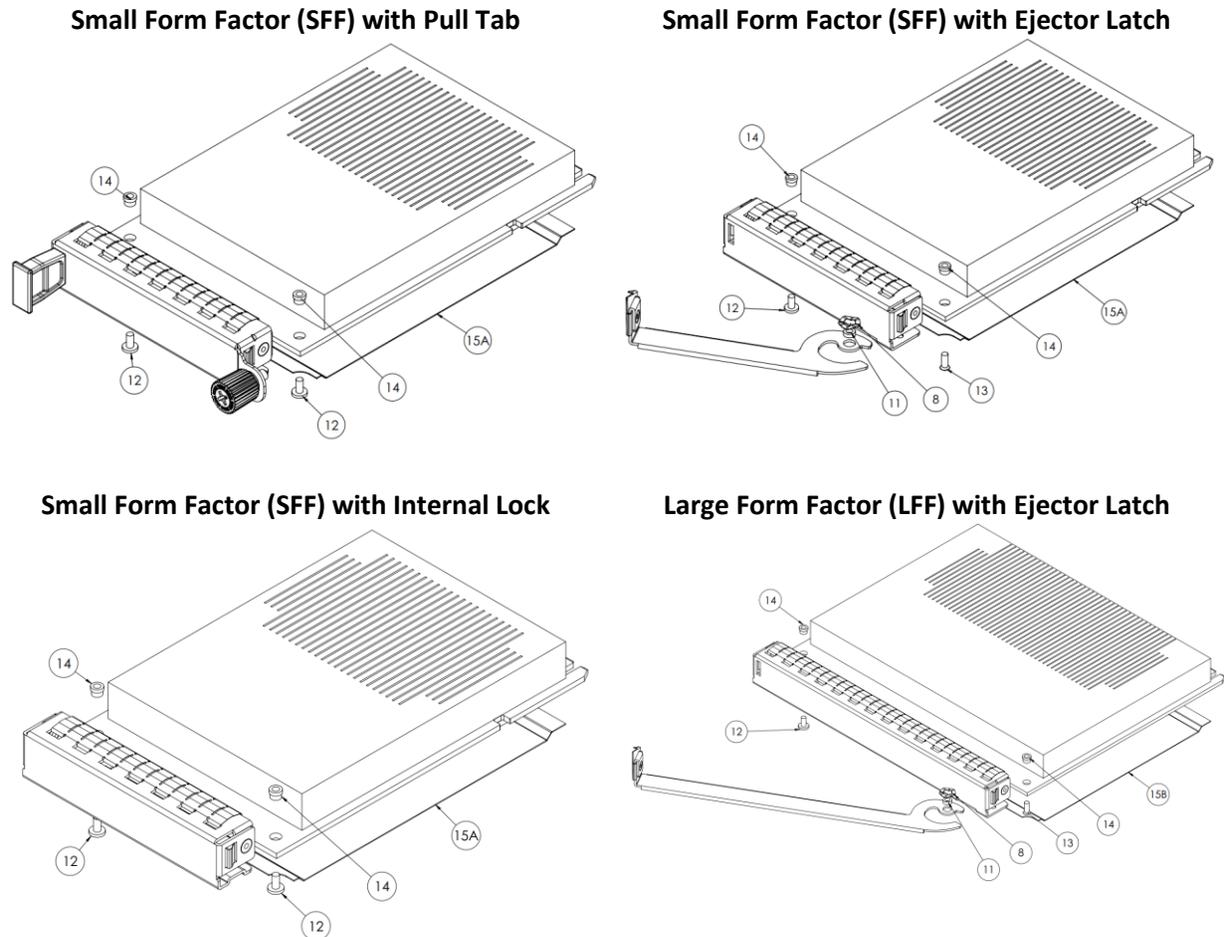


Diagram callouts #8, and #11 through #15 are installed at the NIC assembly level:

Item #8 and #11 – Wave washer and bushing are part of the ejector latch mechanism.

Item #12 & #13 – Screws used to attach the faceplate assembly to the OCP NIC 3.0 PBA.

Item #14 – 2x SMT nuts installed on to the PBA assembly using the reflow process.

Item #15 – Insulator is located on the secondary side and is installed on the PBA prior to the faceplate.


## 2.4 Faceplate Subassembly (SFF and LFF)

The following section define the generic small form factor and large form factor faceplates.

### 2.4.1 Faceplate Subassembly – Exploded View

The images in Figure 14 illustrate the three faceplates subassemblies as exploded views. The bill of materials is shown in Section 2.4.2.

Figure 14: Faceplate Assembly Exploded Views (SFF and LFF)

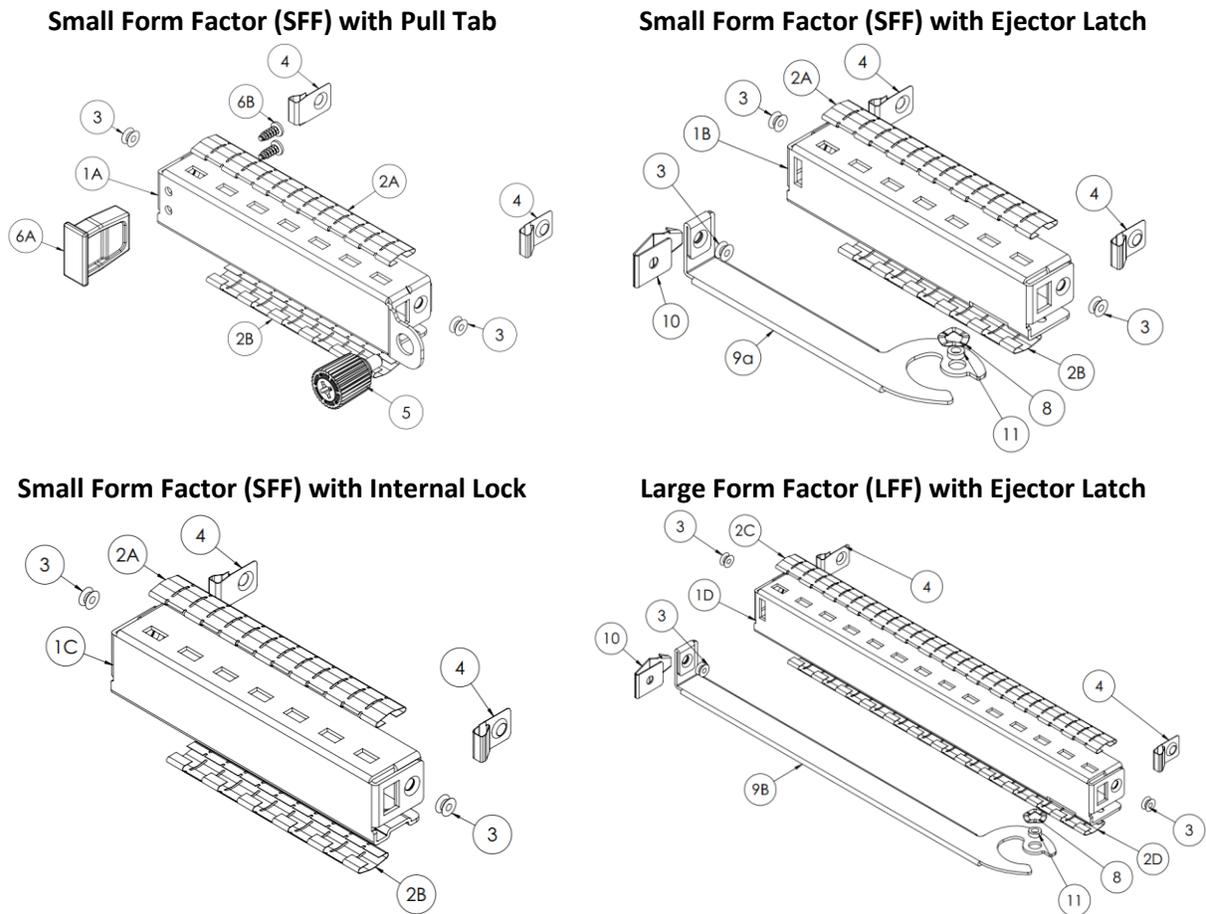

### 2.4.2 Faceplate Subassembly – Bill of Materials (BOM)

Table 7 shows the bill of materials for the SFF and LFF assemblies. Item number call outs align with the SFF and LFF numbering of Figure 14.


Note: Dimensionally identical equivalent parts and equivalent materials may be substituted in the assembly. Substituted parts and materials shall meet or exceed the tolerances and requirements specified by the supplier part numbers of Table 7. Refer to the 3D CAD files for hardware specifics not covered by this table.

Table 7: Bill of Materials for the SFF and LFF Faceplate Assembly

| Item #               | Item description  | Part Number / Drawing   | Supplier                                    |   |    |   |        |   |    |   |                     |
|----------------------|---|---|---|---|----|---|--------|---|----|---|---------------------|
| 1A<br>1B<br>1C<br>1D | Faceplate   | See Section 2.4.3:<br><table border="1"> <tr> <td>1A</td> <td>NIC_OCPv3_SFF_Faceplate_Pulltab_20180601.pdf</td> </tr> <tr> <td>1B</td> <td>NIC_OCPv3_SFF_Faceplate_Latch_20180601.pdf</td> </tr> <tr> <td>1C</td> <td>NIC_OCPv3_SFF_Faceplate_IntLock_20180601.pdf</td> </tr> </table><br>See Section 2.4.4:<br><table border="1"> <tr> <td>1D</td> <td>NIC_OCPv3_LFF_Faceplate_Latch_20180601.pdf</td> </tr> </table>                          | 1A  | NIC_OCPv3_SFF_Faceplate_Pulltab_20180601.pdf                        | 1B | NIC_OCPv3_SFF_Faceplate_Latch_20180601.pdf                          | 1C     | NIC_OCPv3_SFF_Faceplate_IntLock_20180601.pdf                        | 1D | NIC_OCPv3_LFF_Faceplate_Latch_20180601.pdf                          | Custom              |
| 1A                   | NIC_OCPv3_SFF_Faceplate_Pulltab_20180601.pdf                        |   |   |   |    |   |        |   |    |   |                     |
| 1B                   | NIC_OCPv3_SFF_Faceplate_Latch_20180601.pdf                          |   |   |   |    |   |        |   |    |   |                     |
| 1C                   | NIC_OCPv3_SFF_Faceplate_IntLock_20180601.pdf                        |   |   |   |    |   |        |   |    |   |                     |
| 1D                   | NIC_OCPv3_LFF_Faceplate_Latch_20180601.pdf                          |   |   |   |    |   |        |   |    |   |                     |
| 2A<br>2B<br>2C<br>2D | Top and Bottom EMI Fingers  | <table border="1"> <tr> <td>2A</td> <td>LT18CJ1921 – 13 fingers (Laird)<br/>TF187VE32F11-2.41-08 (Tech-Etch)</td> </tr> <tr> <td>2B</td> <td>LT18CJ1920 – 11 fingers (Laird)<br/>TF187VE32F11-2.04-08 (Tech-Etch)</td> </tr> <tr> <td>2C</td> <td>LT18CJ1923 – 27 fingers (Laird)<br/>TF187VE32F11-5.03-08 (Tech-Etch)</td> </tr> <tr> <td>2D</td> <td>LT18CJ1922 – 25 fingers (Laird)<br/>TF187VE32F11-4.66-08 (Tech-Etch)</td> </tr> </table> | 2A  | LT18CJ1921 – 13 fingers (Laird)<br>TF187VE32F11-2.41-08 (Tech-Etch) | 2B | LT18CJ1920 – 11 fingers (Laird)<br>TF187VE32F11-2.04-08 (Tech-Etch) | 2C     | LT18CJ1923 – 27 fingers (Laird)<br>TF187VE32F11-5.03-08 (Tech-Etch) | 2D | LT18CJ1922 – 25 fingers (Laird)<br>TF187VE32F11-4.66-08 (Tech-Etch) | Laird,<br>Tech-ETCH |
| 2A                   | LT18CJ1921 – 13 fingers (Laird)<br>TF187VE32F11-2.41-08 (Tech-Etch) |   |   |   |    |   |        |   |    |   |                     |
| 2B                   | LT18CJ1920 – 11 fingers (Laird)<br>TF187VE32F11-2.04-08 (Tech-Etch) |   |   |   |    |   |        |   |    |   |                     |
| 2C                   | LT18CJ1923 – 27 fingers (Laird)<br>TF187VE32F11-5.03-08 (Tech-Etch) |   |   |   |    |   |        |   |    |   |                     |
| 2D                   | LT18CJ1922 – 25 fingers (Laird)<br>TF187VE32F11-4.66-08 (Tech-Etch) |   |   |   |    |   |        |   |    |   |                     |
| 3                    | Rivet   | 1-AC-2421-03_2.4x2.1  | Dong Guan KSETT<br>Hardware<br>Technology   |   |    |   |        |   |    |   |                     |
| 4                    | Side EMI Fingers  | LT18DP1911  | Laird                                       |   |    |   |        |   |    |   |                     |
| 5                    | Thumbscrew  | 4C-99-343-K077  | Southco, Inc.                               |   |    |   |        |   |    |   |                     |
| 6A<br>6B             | Pull tab w/2x screws  | CN-99-459   | Southco, Inc.                               |   |    |   |        |   |    |   |                     |
| 8                    | Ejector Wave Compression Washer                                     | See Section 2.4.9 and drawing<br>NIC_OCPv3_EjectorWasher_20180601.pdf   | Custom                                      |   |    |   |        |   |    |   |                     |
| 9A<br>9B             | Ejector Handle  | <b>SFF Ejector:</b> See Section 2.4.5 and drawing<br><table border="1"> <tr> <td>9A</td> <td>NIC_OCPv3_EjectorHandle_Short_20180601.pdf</td> </tr> </table> Note: The SFF ejector is also used on the LFF non-shadowed I/O faceplate configuration.<br><br><b>LFF Ejector:</b> See Section 2.4.6 & Drawing<br><table border="1"> <tr> <td>9B</td> <td>NIC_OCPv3_EjectorHandle_Long_20180601.pdf</td> </tr> </table>                             | 9A  | NIC_OCPv3_EjectorHandle_Short_20180601.pdf                          | 9B | NIC_OCPv3_EjectorHandle_Long_20180601.pdf                           | Custom |   |    |   |                     |
| 9A                   | NIC_OCPv3_EjectorHandle_Short_20180601.pdf                          |   |   |   |    |   |        |   |    |   |                     |
| 9B                   | NIC_OCPv3_EjectorHandle_Long_20180601.pdf                           |   |   |   |    |   |        |   |    |   |                     |
| 10                   | Ejector Lock  | See Section 2.4.7 and drawing<br>NIC_OCPv3_EjectorLock_20180601.pdf   | Custom                                      |   |    |   |        |   |    |   |                     |
| 11                   | Ejector Bushing   | See Section 2.4.8 and drawing<br>NIC_OCPv3_EjectorBushing_20180601.pdf  | Custom                                      |   |    |   |        |   |    |   |                     |
| 12                   | Screw for securing faceplate to NIC                                 | ICMMAJ200403N3  | WUJIANG Screw<br>Tech Precision<br>Industry |   |    |   |        |   |    |   |                     |
| 13                   | Screw for attaching faceplate and ejector to NIC                    | FCMMQ200503N  | WUJIANG Screw<br>Tech Precision<br>Industry |   |    |   |        |   |    |   |                     |
| 14                   | SMT nut (on NIC)  | 82-950-22-010-01-RL   | Fivetech<br>Technology Inc.                 |   |    |   |        |   |    |   |                     |
| 15A<br>15B           | Insulator   | Refer to Section 2.7 for the SFF (15A) and LFF (15B) insulator mechanical requirements  | Custom                                      |   |    |   |        |   |    |   |                     |




Figure 17: SFF Generic I/O Faceplate – Internal Lock Version (2D View)

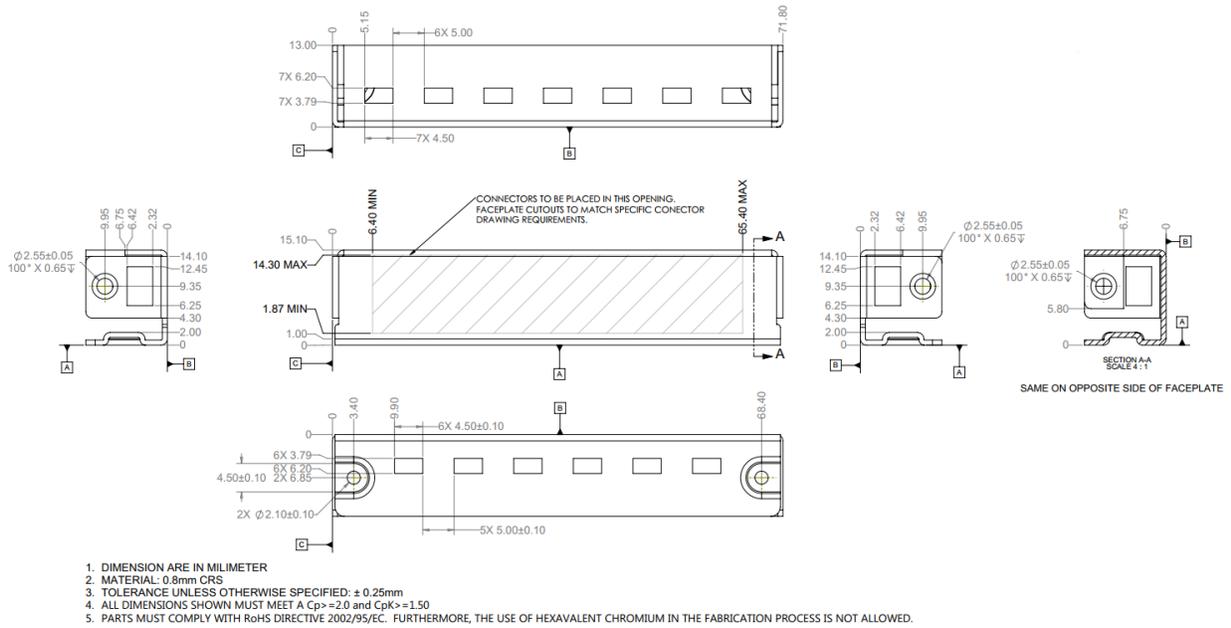

## 2.4.4 LFF Generic I/O Faceplate


Figure 18: LFF Generic I/O Faceplate – Dual Ejector Version (2D View)

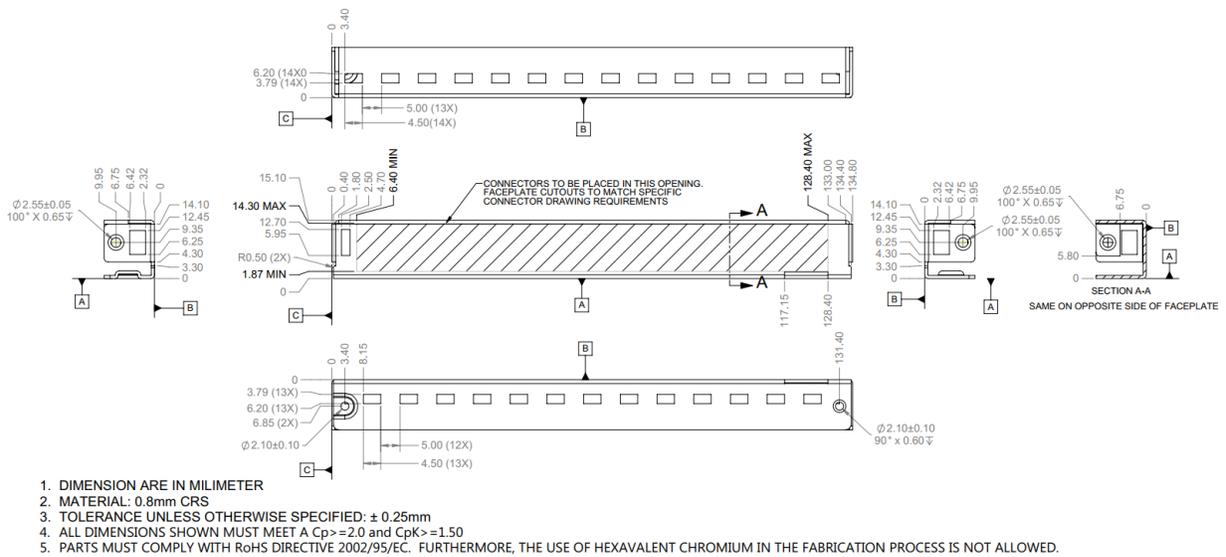

### 2.4.5 Ejector Lever (SFF)

This section defines the SFF lever dimensions. Note: this SFF ejector lever is also used on the non-shadowed LFF faceplate configuration.

Figure 19: SFF I/O Faceplate – Ejector Lever (2D View)

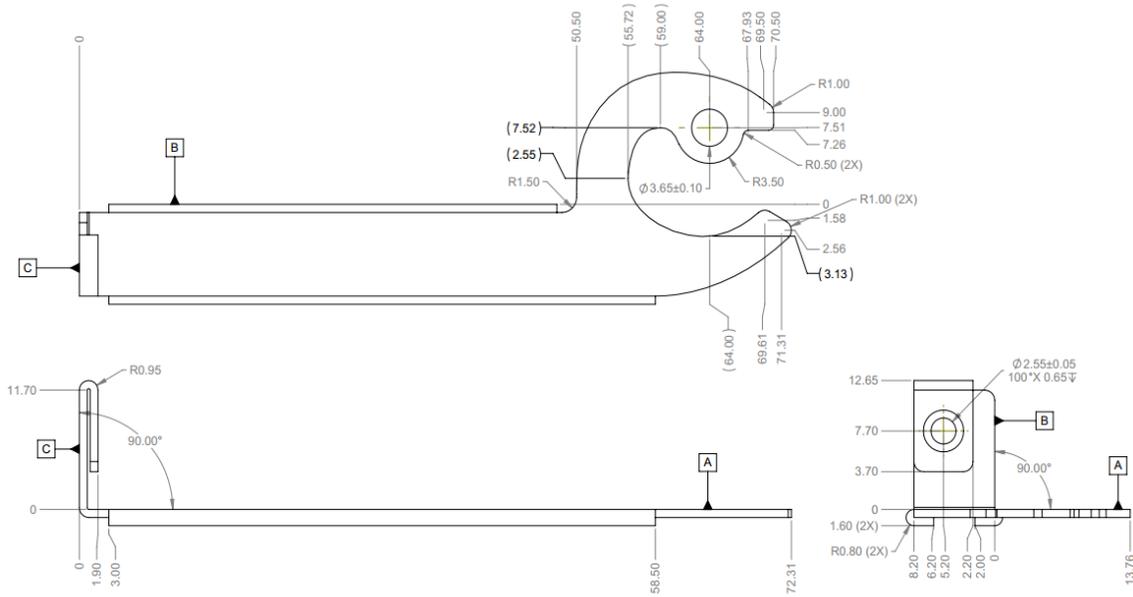


1. DIMENSION ARE IN MILIMETER
2. MATERIAL: 0.8mm 301 SS 1/4 HARD
3. TOLERANCE UNLESS OTHERWISE SPECIFIED: ± 0.25mm, ±1.0°

### 2.4.6 Ejector Levers (LFF)

This section defines the LFF ejector lever dimensions.

Figure 20: LFF I/O Faceplate – Ejector Lever (2D View)

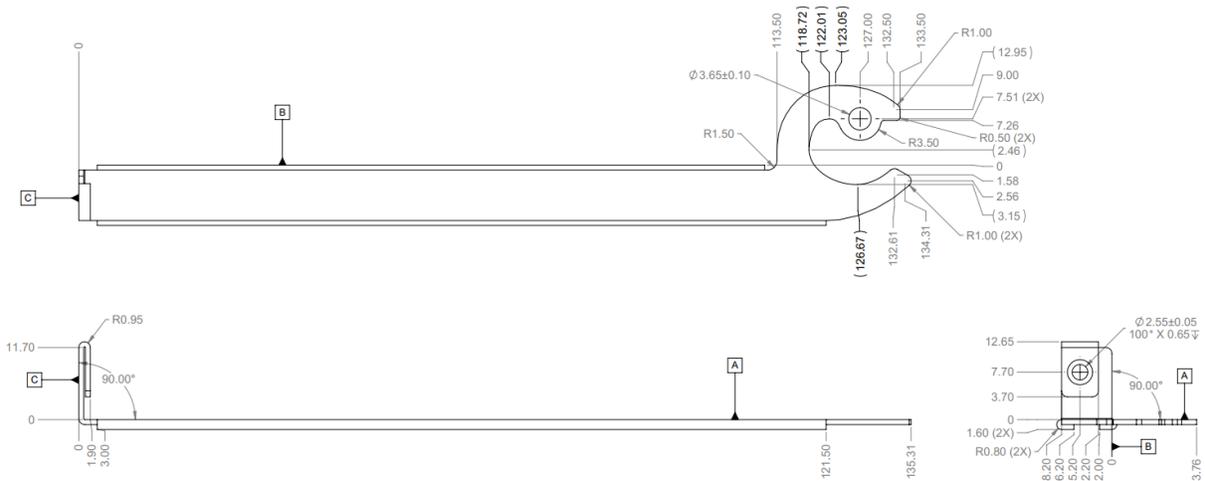


1. DIMENSION ARE IN MILIMETER
2. MATERIAL: 0.8mm 301 SS 1/4 HARD
3. TOLERANCE UNLESS OTHERWISE SPECIFIED: ± 0.25mm, ±1.0°
4. PARTS MUST COMPLY WITH RoHS DIRECTIVE 2002/95/EC. FURTHERMORE, THE USE OF HEXAVALENT CHROMIUM IN THE FABRICATION PROCESS IS NOT ALLOWED.

### 2.4.7 Ejector Lock (SFF and LFF)

The SFF and LFF ejector uses a locking mechanism at the end of the handle to retain the lever position. This is shown in Figure 21.

Figure 21: Ejector Lock

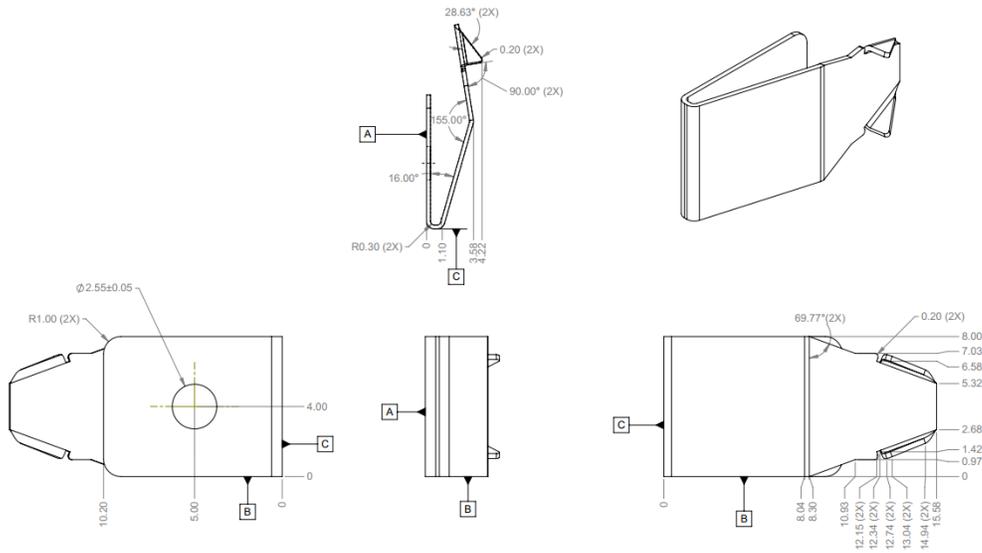


1. DIMENSION ARE IN MILIMETER
2. MATERIAL: 0.3mm 301 SS 1/2 HARD
3. TOLERANCE UNLESS OTHERWISE SPECIFIED: ± 0.25mm, ±1.0°
4. PARTS MUST COMPLY WITH RoHS DIRECTIVE 2002/95/EC. FURTHERMORE, THE USE OF HEXAVALENT CHROMIUM IN THE FABRICATION PROCESS IS NOT ALLOWED.

### 2.4.8 Ejector Bushing (SFF and LFF)

The SFF and LFF card ejector handle uses a bushing as a spacer and rotation anchor. This is shown in Figure 22.

Figure 22: Ejector Bushing

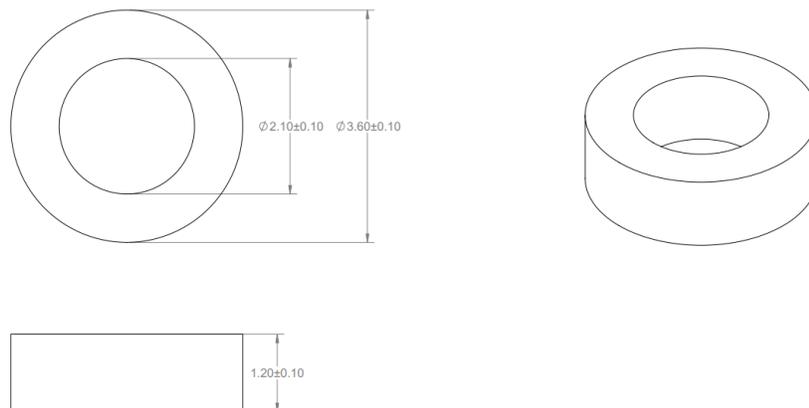


1. DIMENSION ARE IN MILIMETER
2. MATERIAL: STEEL SAE 1215
3. TOLERANCE UNLESS OTHERWISE SPECIFIED: ± 0.25mm, ±1.0°
4. PARTS MUST COMPLY WITH RoHS DIRECTIVE 2002/95/EC. FURTHERMORE, THE USE OF HEXAVALENT CHROMIUM IN THE FABRICATION PROCESS IS NOT ALLOWED.

### 2.4.9 Ejector Wave Washer (SFF and LFF)

The SFF and LFF card ejector handle uses a wave washer between the handle and faceplate assembly. This is shown in Figure 23.

Figure 23: Wave Washer

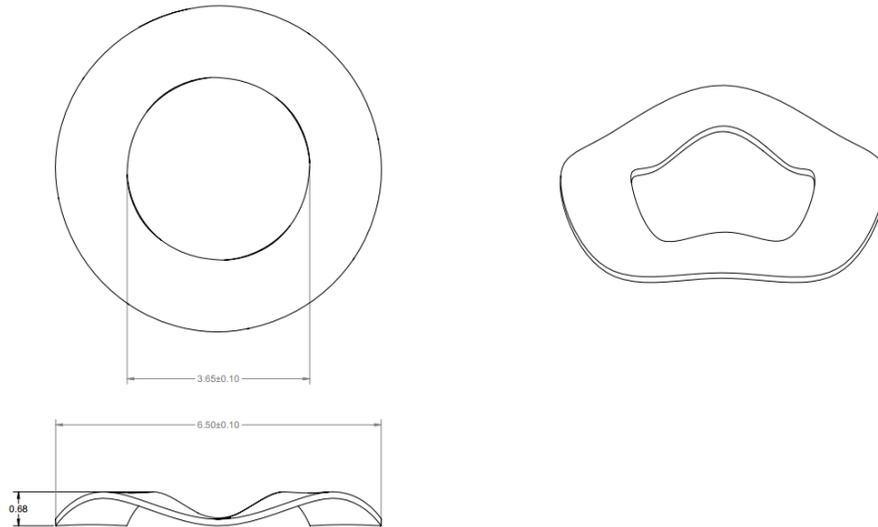


1. DIMENSION ARE IN MILLIMETER
2. MATERIAL: 65Mn SPRING STEEL, HEAT TREATED
3. TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.25\text{mm}$ ,  $\pm 1.0^\circ$
4. PARTS MUST COMPLY WITH RoHS DIRECTIVE 2002/95/EC. FURTHERMORE, THE USE OF HEXAVALENT CHROMIUM IN THE FABRICATION PROCESS IS NOT ALLOWED.

## 2.5 Card Keep Out Zones

### 2.5.1 SFF Keep Out Zones

Figure 24: SFF Keep Out Zone – Top View

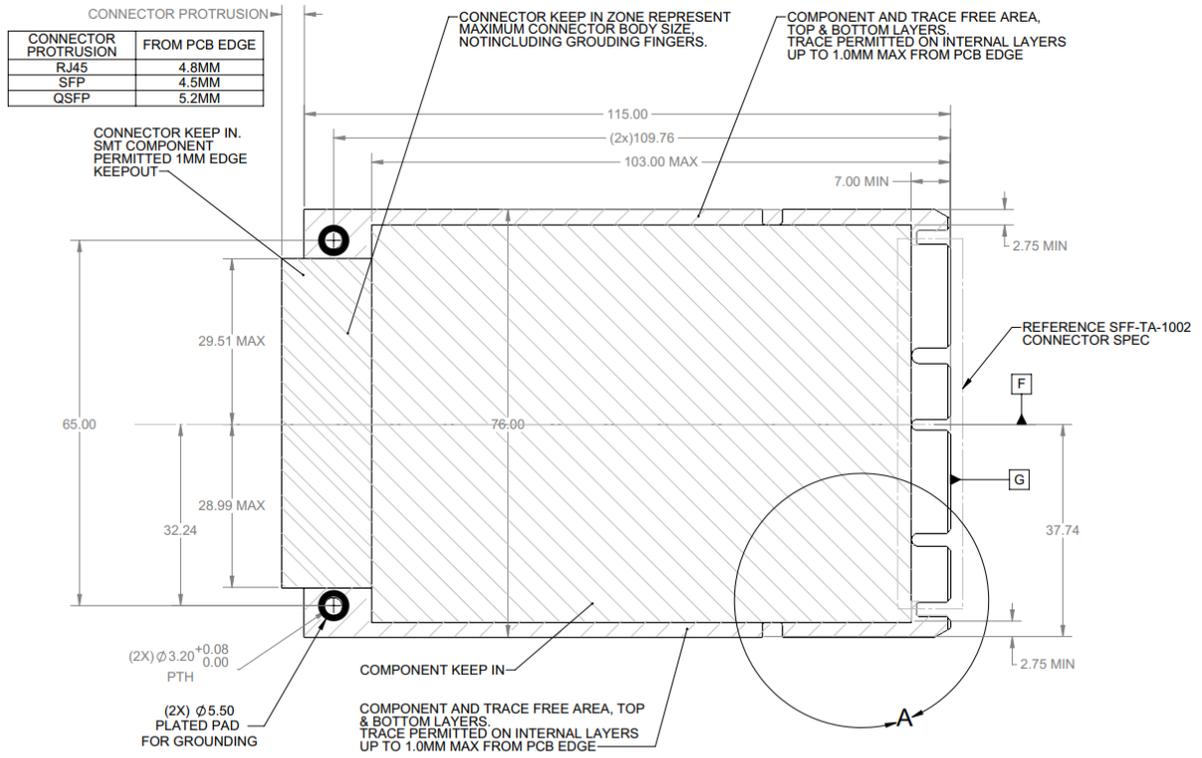

NOTES:  
1. TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.13, \pm 1.0^\circ$

Figure 25: SFF Keep Out Zone – Top View – Detail A


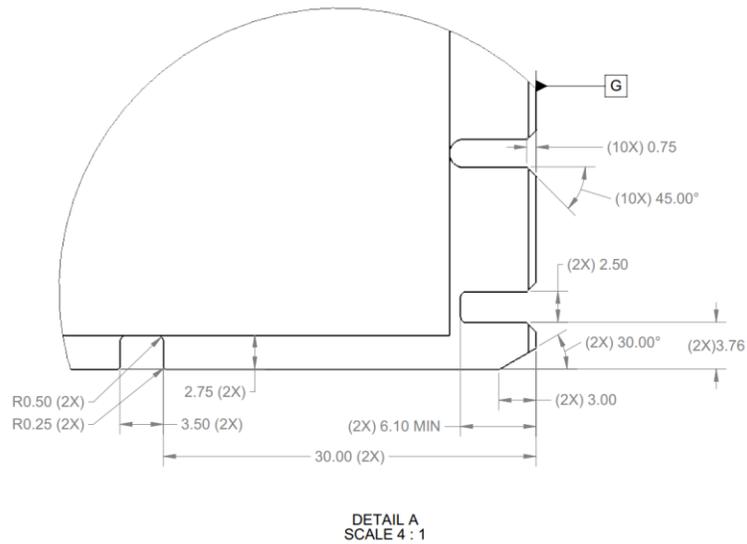



Figure 26: SFF Keep Out Zone – Bottom View

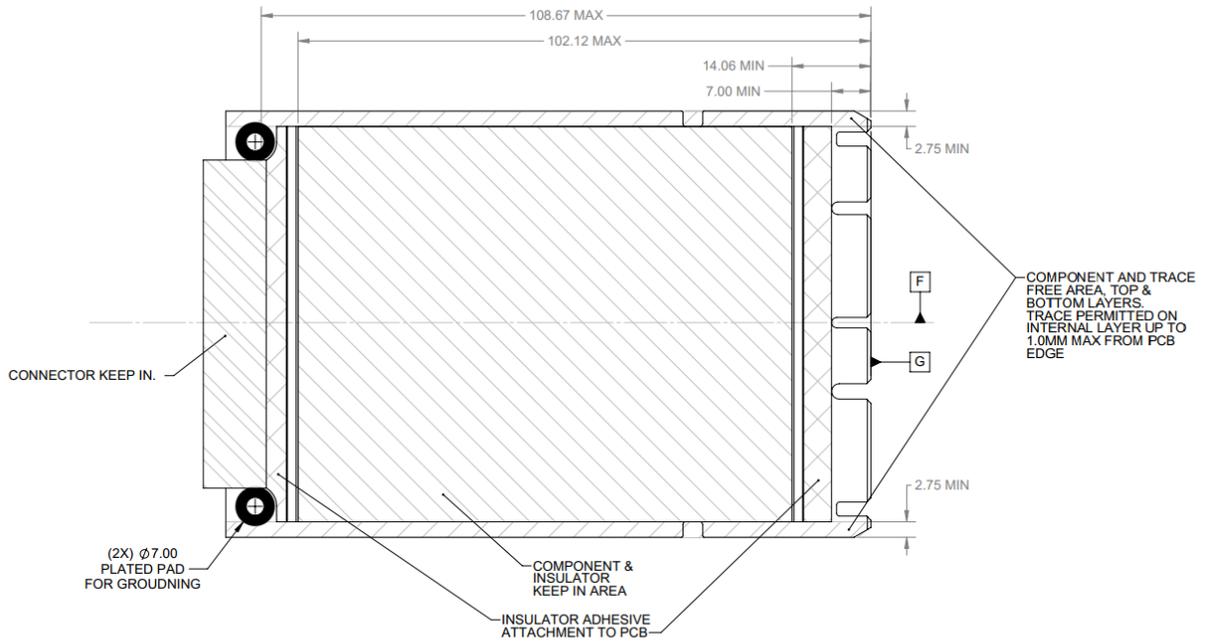

NOTES:  
1. TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.13$ ,  $\pm 1.0^\circ$


Figure 27: SFF Keep Out Zone – Side View

| DIMENSION "A" CONNECTOR HEIGHT | MAX (mm) |
|--------------------------------|----------|
| WITH LATCH                     | 1.70     |
| W/O LATCH                      | 2.77     |

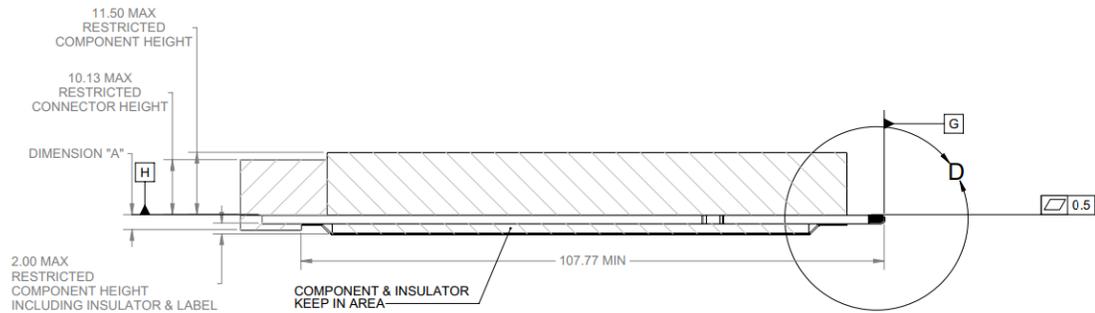

NOTES:  
1. TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.13$ ,  $\pm 1.0^\circ$

Figure 28: SFF Keep Out Zone – Side View – Detail D

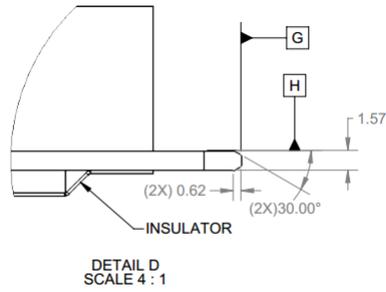

2.5.2 LFF Keep Out Zones

Figure 29: LFF Keep Out Zone – Top View

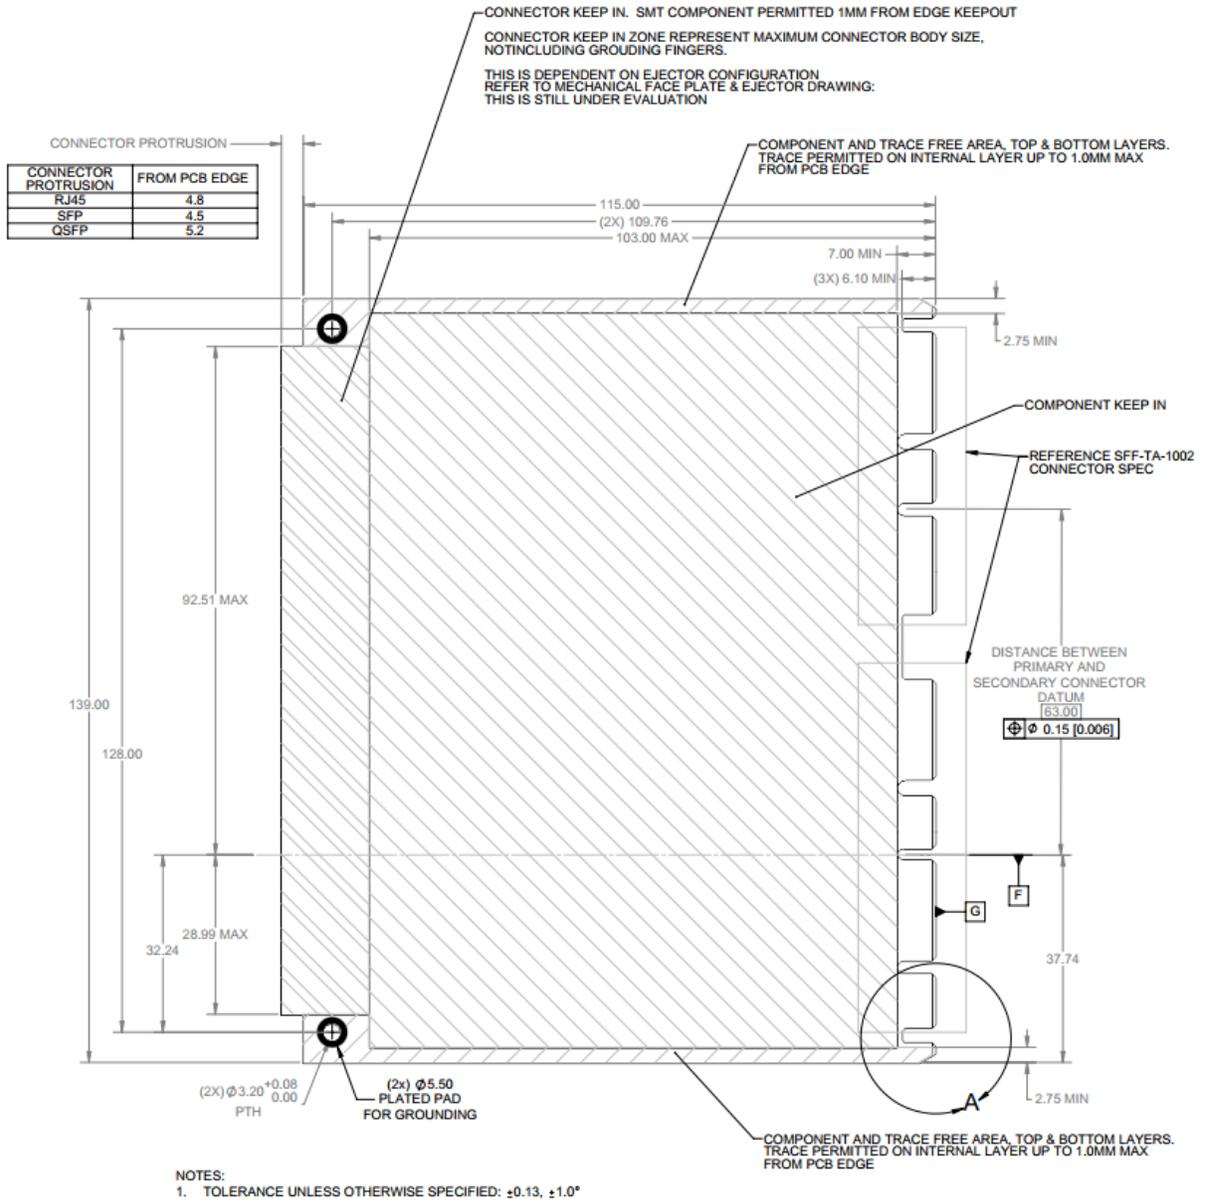


Figure 30: LFF Keep Out Zone – Top View – Detail A

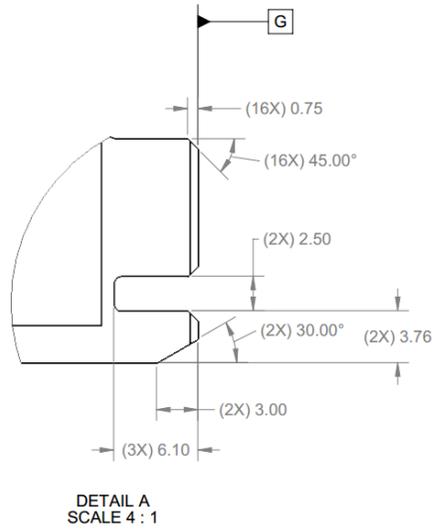


Figure 31: LFF Keep Out Zone – Bottom View



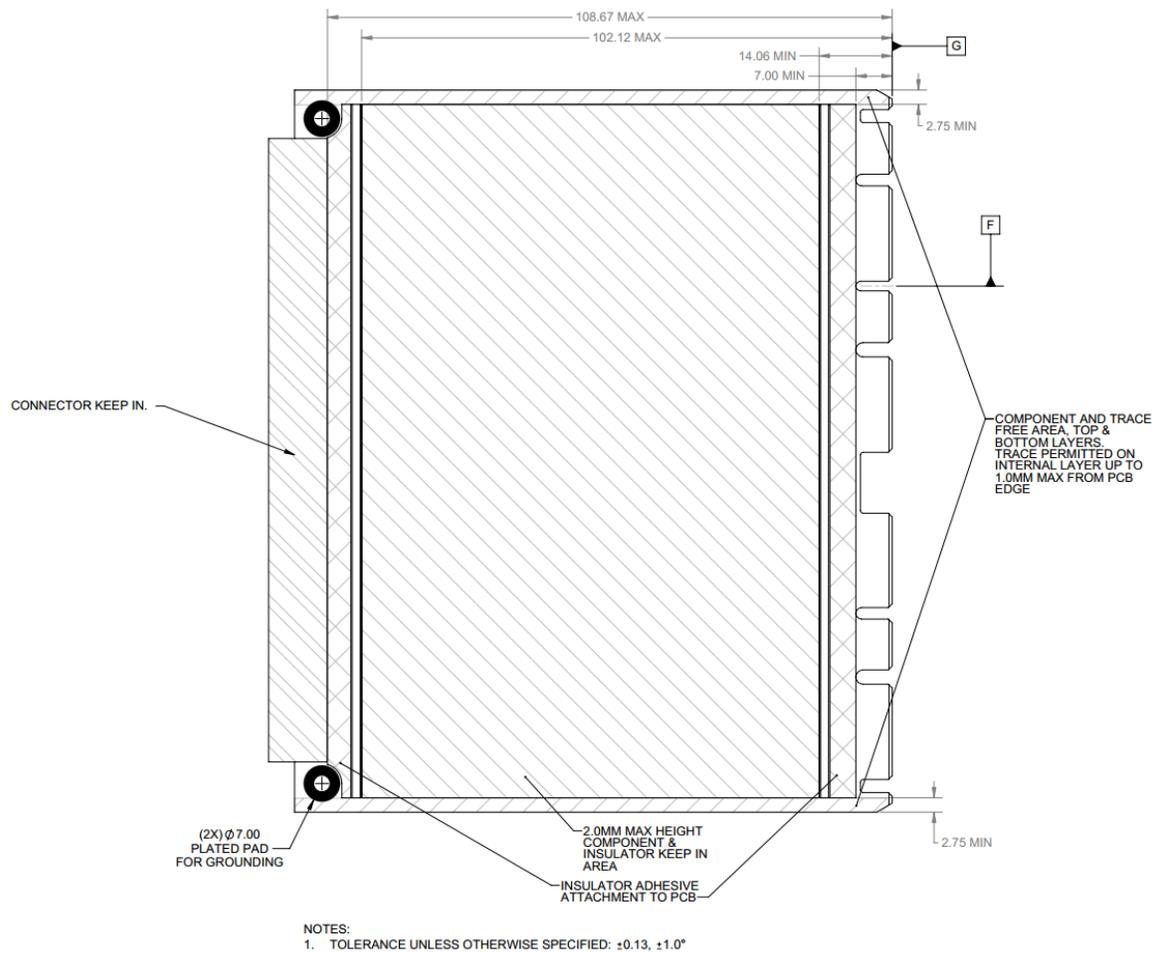


Figure 32: LFF Keep Out Zone – Side View

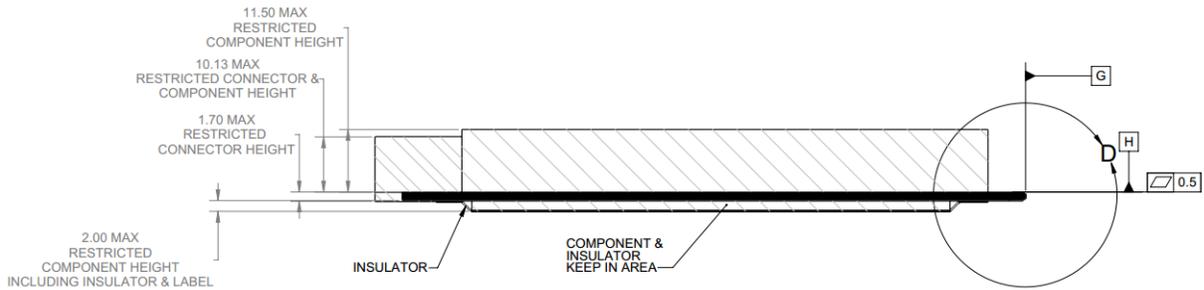

NOTES:  
1. TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.13$ ,  $\pm 1.0^\circ$

Figure 33: LFF Keep Out Zone – Side View – Detail D

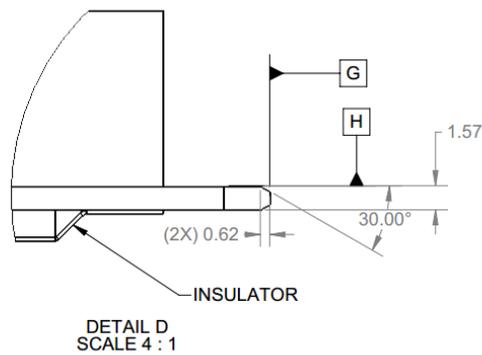

## 2.6 Baseboard Keep Out Zones

Refer to the 3D CAD files for the baseboard keep out zones for both the Small and Large form factor designs. The 3D CAD files are available for download on the OCP NIC 3.0 Wiki:

<http://www.opencompute.org/wiki/Server/Mezz>

## 2.7 Insulation Requirements

All OCP NIC 3.0 cards shall implement an insulator to prevent the bottom side card components from shorting out to the baseboard chassis. The recommended insulator thickness is 0.25mm and shall reside within the following mechanical envelope for the Small and Large size cards.

### 2.7.1 SFF Insulator

Figure 34: SFF Bottom Side Insulator (3D View)


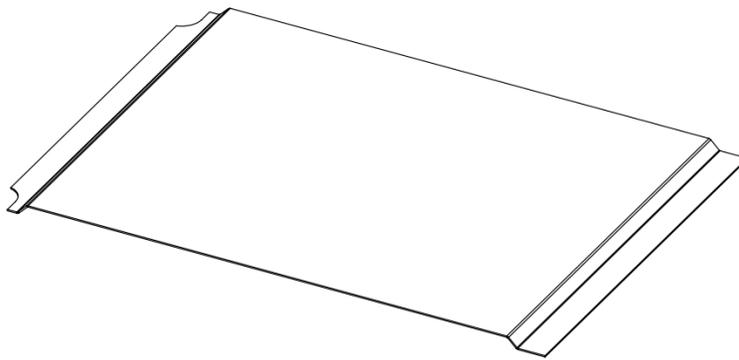


Figure 35: SFF Bottom Side Insulator (Top and Side View)

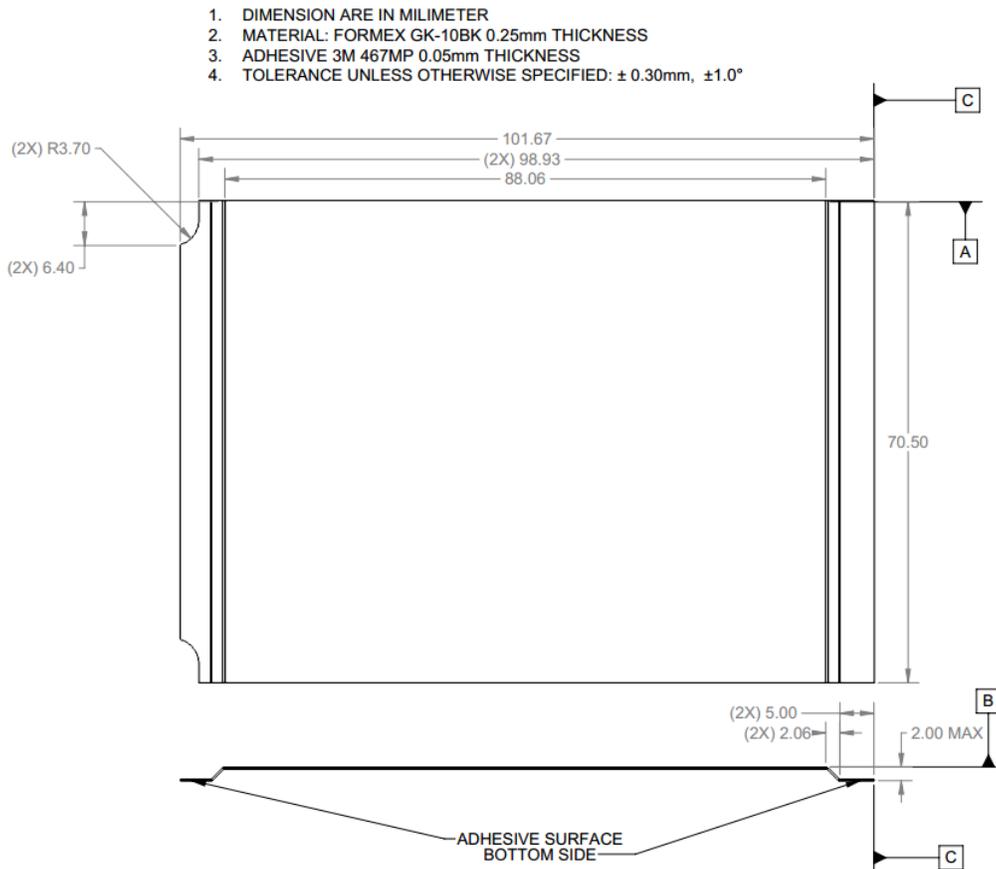

2.7.2 LFF Insulator

Figure 36: LFF Bottom Side Insulator (3D View)


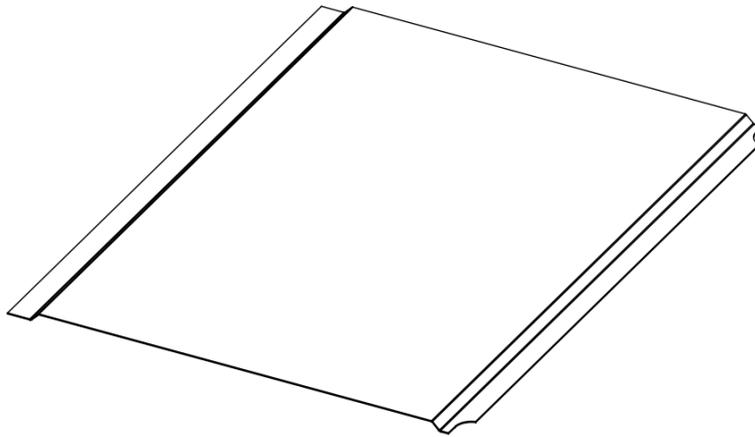


Figure 37: LFF Bottom Side Insulator (Top and Side View)

1. DIMENSION ARE IN MILIMETER
2. MATERIAL: FORMEX GK-10BK 0.25mm THICKNESS
3. ADHESIVE 3M 467MP 0.05mm THICKNESS
4. TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.30\text{mm}$ ,  $\pm 1.0^\circ$

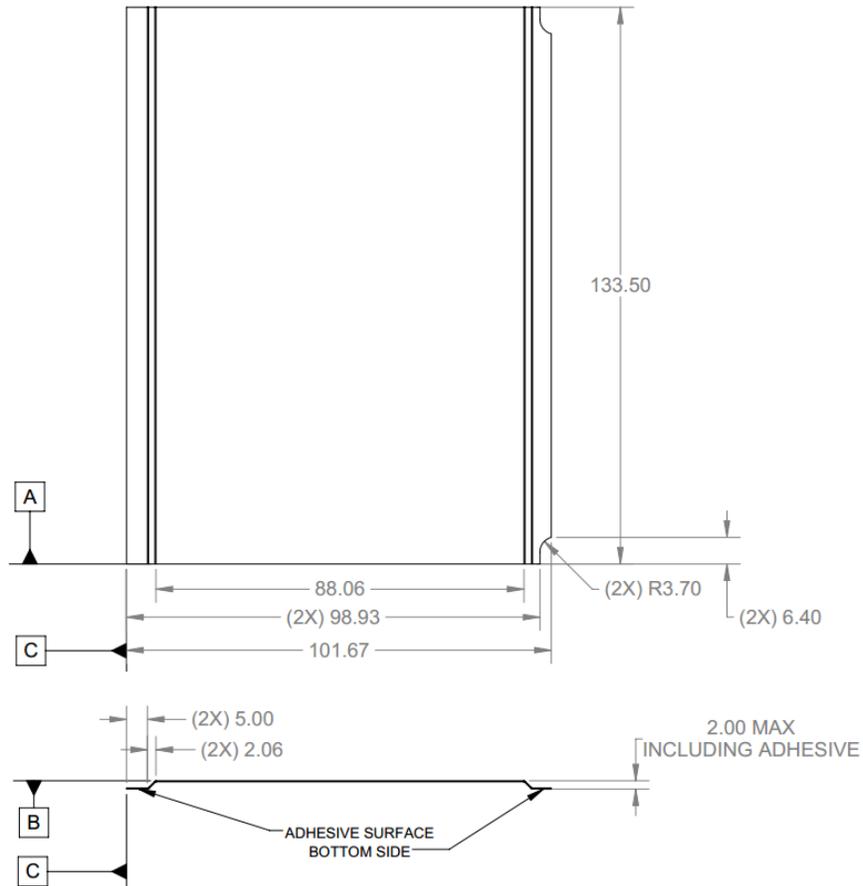

## 2.8 Critical-to-Function (CTF) Dimensions (SFF and LFF)

### 2.8.1 CTF Tolerances

The following CTF tolerances are used in this section and are the same for both the small form factor and large form factor cards.

Table 8: CTF Default Tolerances (SFF and LFF OCP NIC 3.0)

| CTF DEFAULT TOLERANCES |                          |
|------------------------|--------------------------|
| DIMENSION RANGE        | TOLERANCE                |
|                        | TWO PLACE DECIMALS: X.XX |
| LINEAR:                | $\pm 0.30$               |
| ANGULAR:               | $\pm 1.00$ DEGREES       |
| HOLE DIAMETER:         | $\pm 0.13$               |

### 2.8.2 SFF Pull Tab CTF Dimensions

The following dimensions are considered critical-to-function (CTF) for each small form factor OCP NIC 3.0 card with a pull tab and thumbscrew. The CTF default tolerances are shown in Section 2.8.1.

Figure 38: SFF OCP NIC 3.0 Card with Pull Tab CTF Dimensions (Top View)

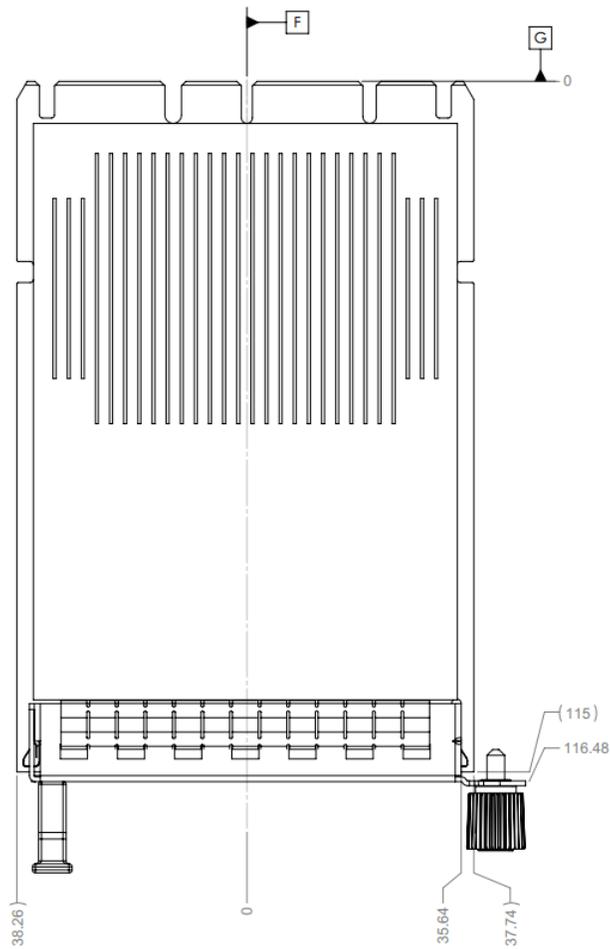


Figure 39: SFF OCP NIC 3.0 Card with Pull Tab CTF Dimensions (Front View)


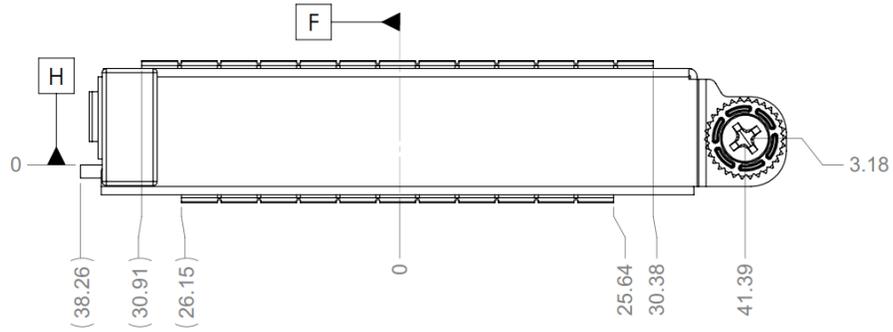


Figure 40: SFF OCP NIC 3.0 Card with Pull Tab CTF Dimensions (Side View)

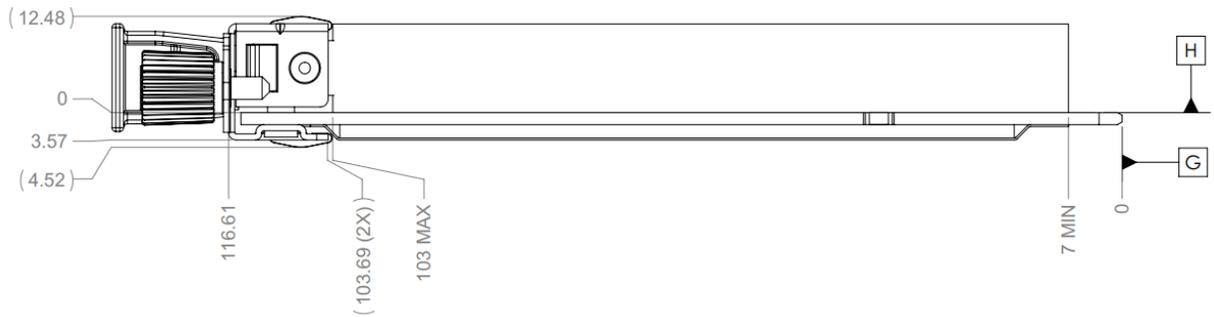

### 2.8.3 SFF OCP NIC 3.0 Card with Ejector Latch CTF Dimensions

The following dimensions are considered critical-to-function (CTF) for each small form factor OCP NIC 3.0 card with ejector latch. The CTF default tolerances are shown in Section 2.8.1.

Figure 41: SFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Top View)

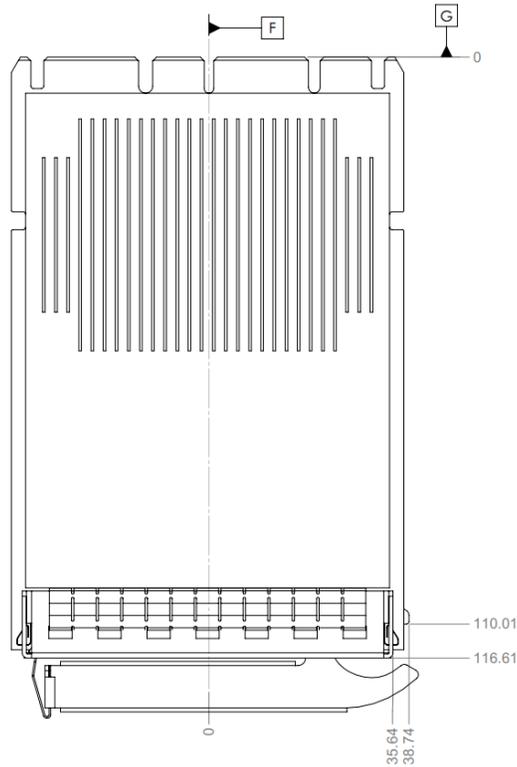


Figure 42: SFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Front View)


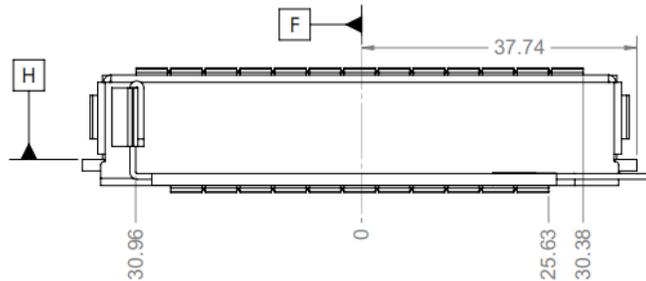


Figure 43: SFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Side View)

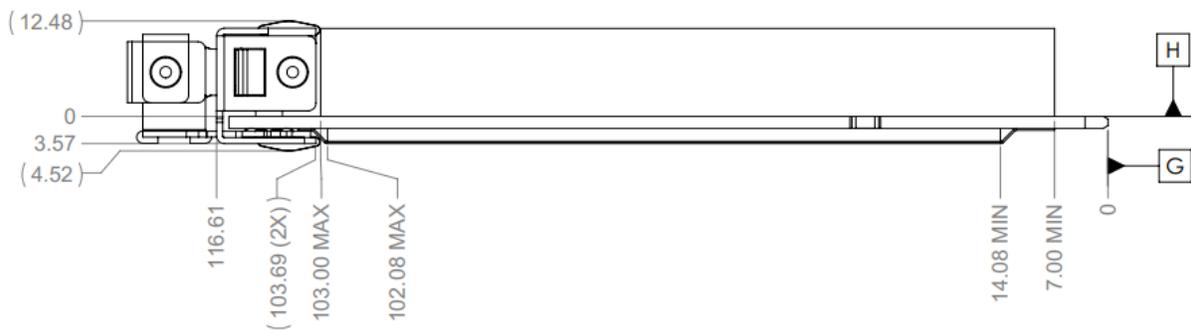

### 2.8.4 SFF OCP NIC 3.0 Baseboard CTF Dimensions

The following dimensions are considered critical-to-function (CTF) for each small form factor baseboard chassis. The CTF default tolerances are shown in Section 2.8.1.

Note: The SFF baseboard CTF dimensions are applicable to both the right angle and straddle mount connector configurations. The faceplate opening relative to the baseboard changes due to the connector vertical offset, but all CTF dimensions remain identical.

Figure 44: SFF Baseboard Chassis CTF Dimensions (Rear View)

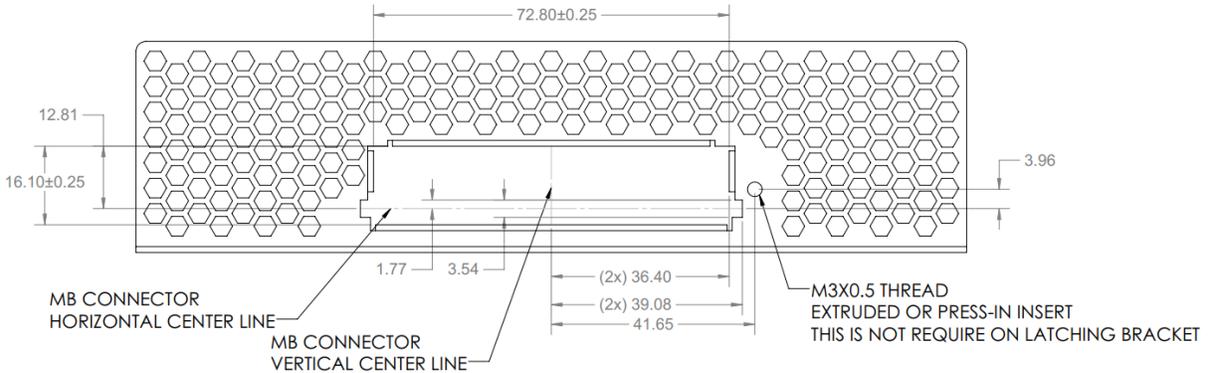


Figure 45: SFF Baseboard Chassis to Card Thumb Screw CTF Dimensions (Side View)

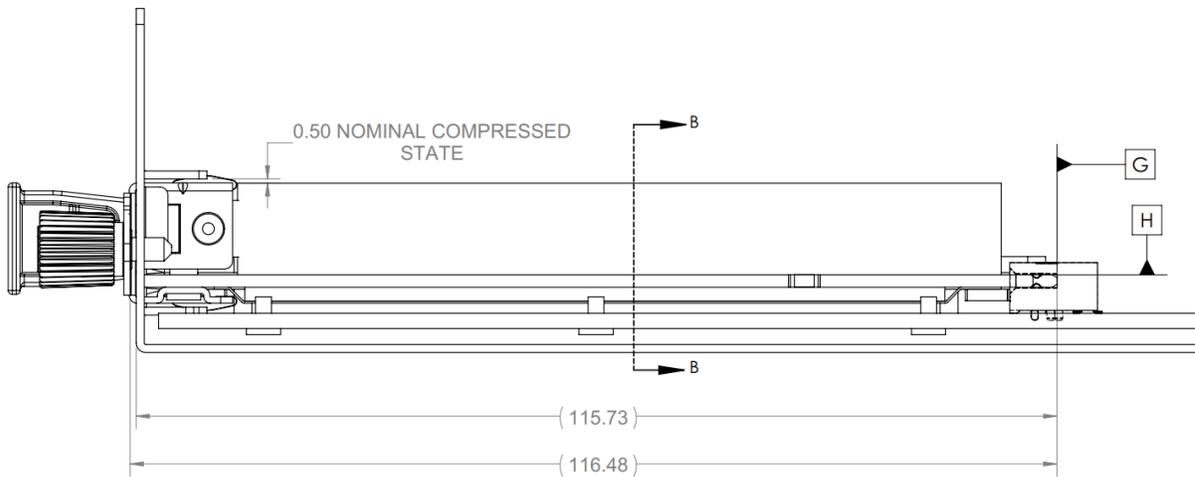


Figure 46: SFF Baseboard Chassis to Ejector lever Card CTF Dimensions (Side View)

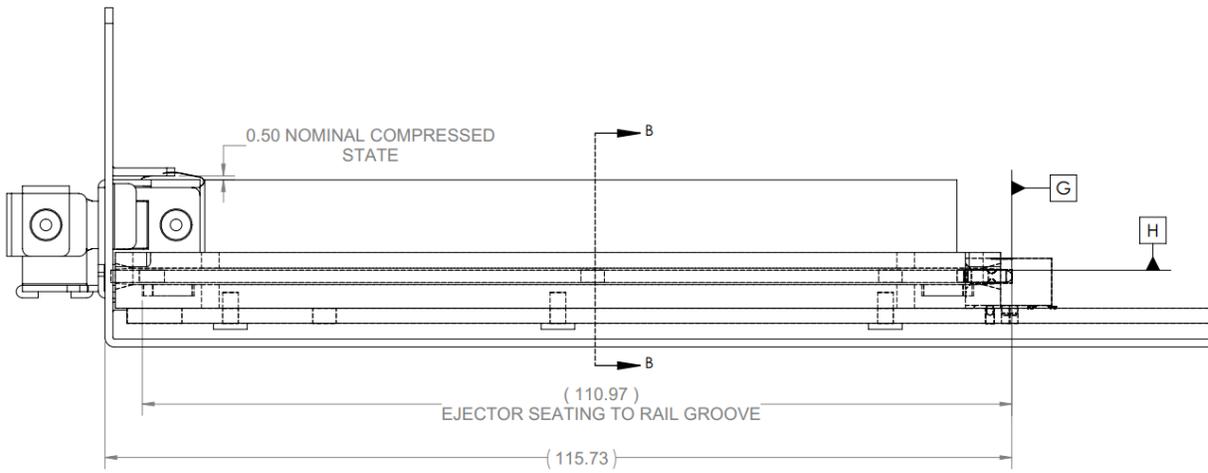


Figure 47: SFF Baseboard Chassis CTF Dimensions (Rear Rail Guide View)


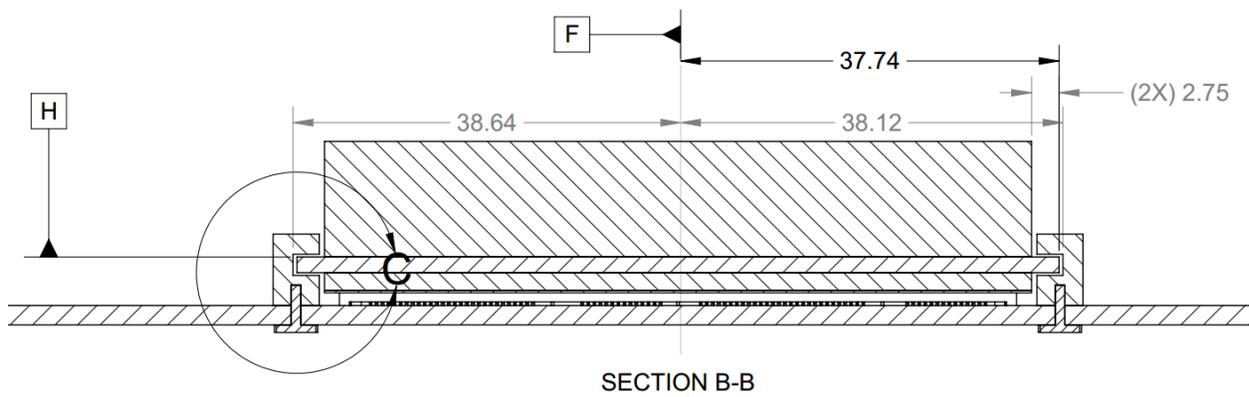


Figure 48: SFF Baseboard Chassis CTF Dimensions (Rail Guide Detail) – Detail C

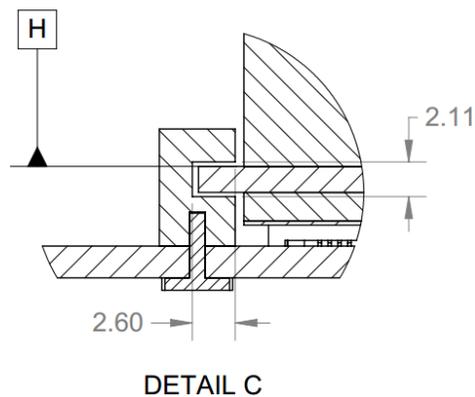

The right angle and straddle mount card guides are identical between the Small and Large form factor cards. The card guide model is included in the 3D CAD packages and may be downloaded from the OCP NIC 3.0 Wiki site: <http://www.opencompute.org/wiki/Server/Mezz>.

### 2.8.5 LFF OCP NIC 3.0 Card CTF Dimensions

The following dimensions are considered critical-to-function (CTF) for each large form factor OCP NIC 3.0 card. The CTF default tolerances are shown in Section 2.8.1.

Figure 49: LFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Top View)

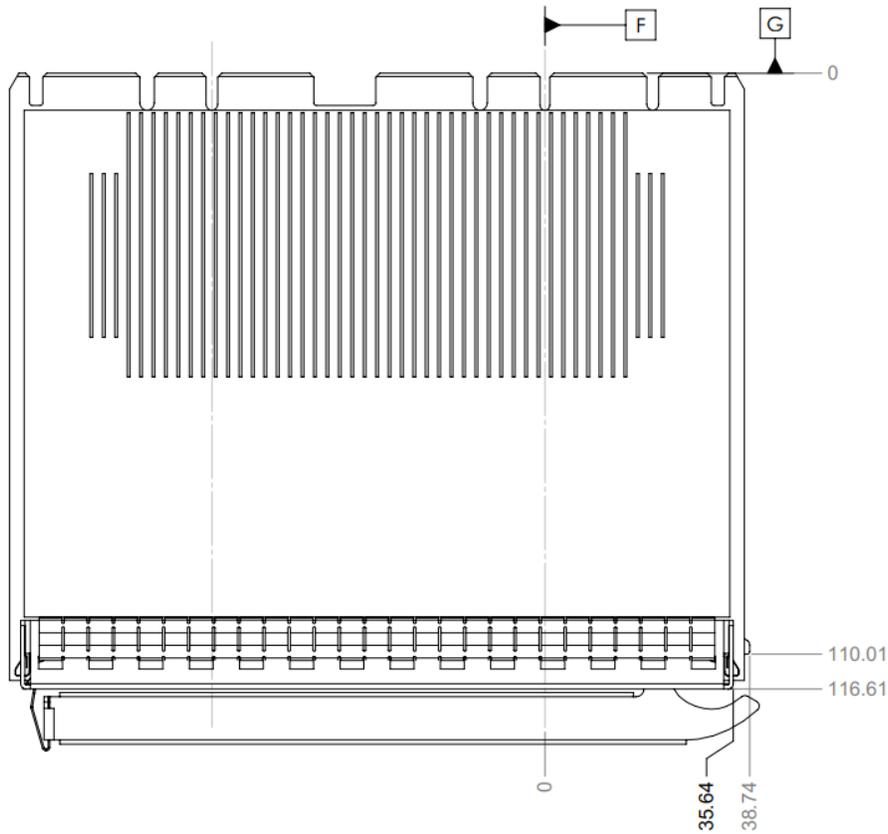


Figure 50: LFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Front View)

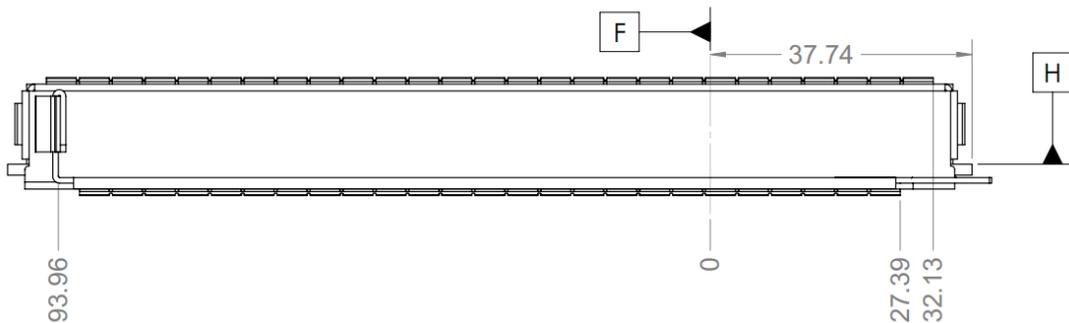


Figure 51: LFF OCP NIC 3.0 Card with Ejector CTF Dimensions (Side View)



### 2.8.6 LFF OCP NIC 3.0 Baseboard CTF Dimensions

The following dimensions are considered critical-to-function (CTF) for each large form factor baseboard chassis. The CTF default tolerances are shown in Section 2.8.1.

Note: The LFF baseboard CTF dimensions are applicable to both the right angle and straddle mount connector configurations. The faceplate opening relative to the baseboard changes due to the connector vertical offset, but all CTF dimensions remain identical.

Figure 52: LFF Baseboard Chassis CTF Dimensions (Rear View)

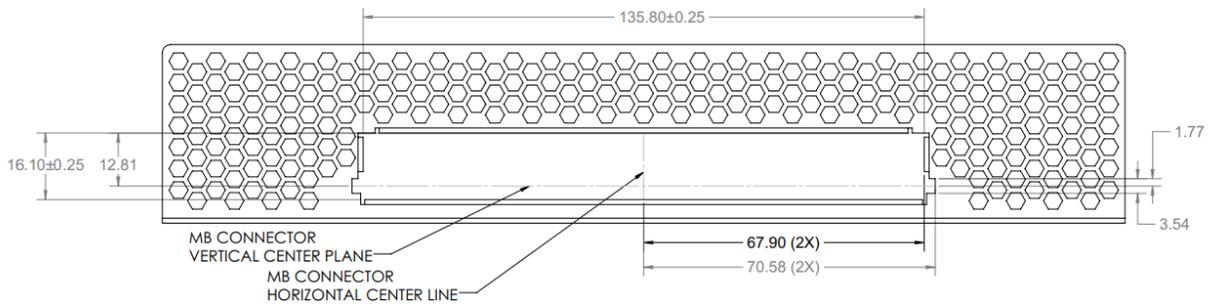


Figure 53: LFF Baseboard Chassis CTF Dimensions (Side View)

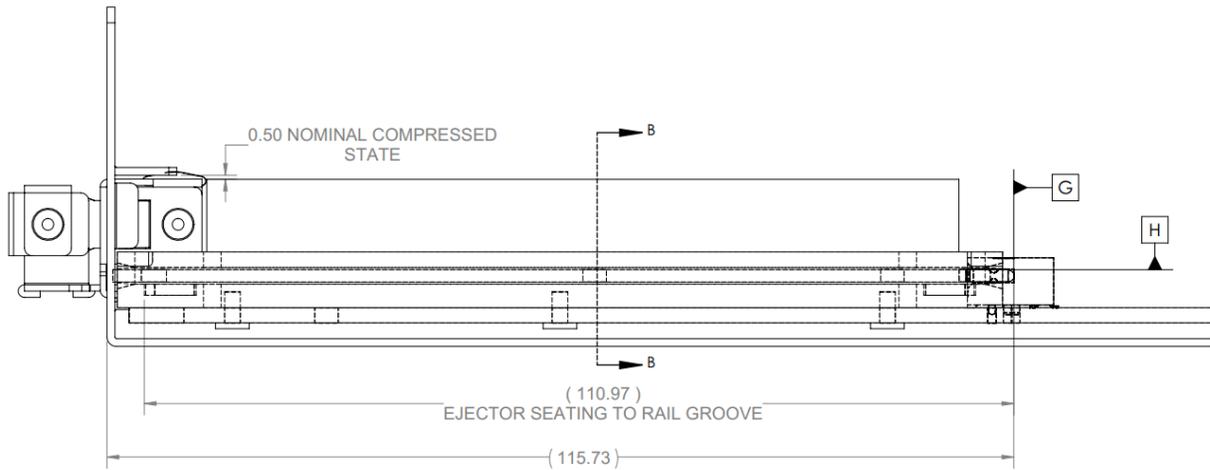


Figure 54: LFF Baseboard Chassis CTF Dimensions (Rail Guide View)


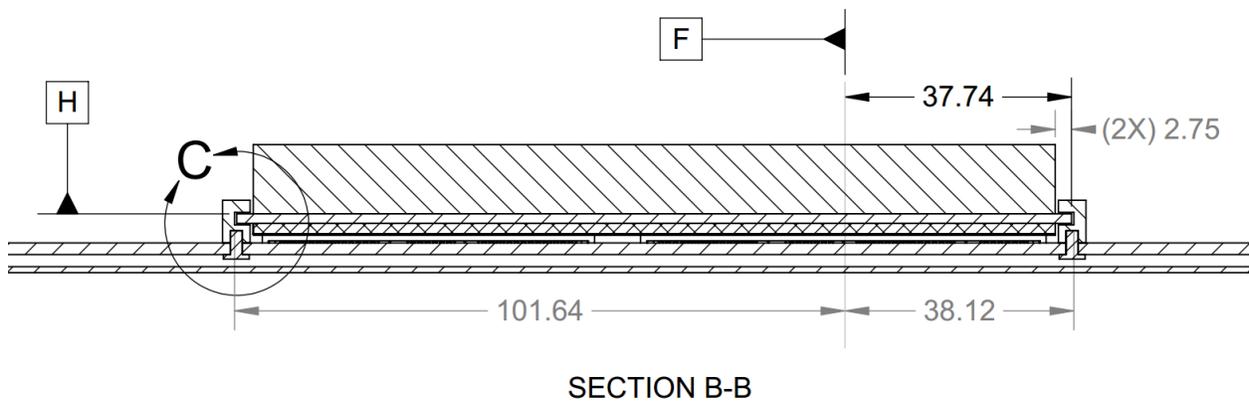


Figure 55: LFF Baseboard Chassis CTF Dimensions (Rail Guide – Detail C)

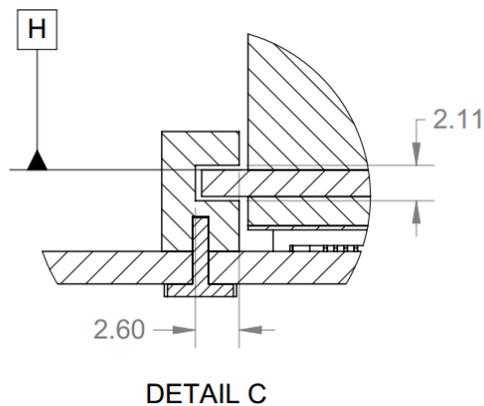

The right angle and straddle mount card guides are identical between the Small and Large form factor cards. The card guide models are included in the 3D CAD packages and may be downloaded from the OCP NIC 3.0 Wiki site: <http://www.opencompute.org/wiki/Server/Mezz>.

## 2.9 Labeling Requirements

OCP NIC 3.0 cards shall implement all (or a subset of) label items listed below as required by each customer. All labels shall be placed on the exposed face of the insulator and within their designated zones. All labels shall be placed within the insulator edge and insulator bend lines to prevent labels from peeling or interfering with the faceplate, chassis card guides and card gold finger edge.


The insulator shall be divided into three different zones:

- **Regulatory Zone** – Used for all regulatory markings and filing numbers
- **Customer Zone** – Used for manufacturer markings or any ODM specific labels
- **OCP NIC 3.0 Zone** – Used for MAC addresses, part number labels and optionally the board serial number label if there are no manufacturer requirements to place it on the primary side

Notes:

- Some NIC vendor(s) may require serial number labels to be placed on the primary side of the PBA. This is permitted but it is up to the NIC vendor(s) to find the appropriate location(s) to affix the label. If a label is to be adhered to the PCB, then the label must be ESD safe as defined by ANSI/ESD S541-2008 (between  $10^4$  and  $10^{11}$  Ohms).
- Regulatory marks may be printed on the insulator or affixed via a label
- Each zone size shall be adjustable to accommodate each vendor's labeling requirements
- All labels shall be oriented and readable in the same direction. The readable direction should be with the line side I/O interfaces facing "up"
- Additional labels may be placed on the primary side or on the PCB itself. This is up to the NIC vendor(s) to find the appropriate location(s)

Figure 56: SFF Label Area Example

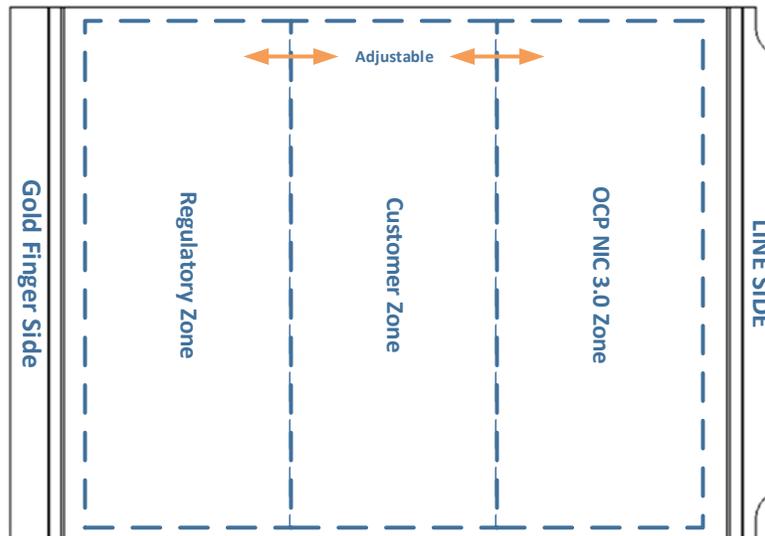

### 2.9.1 General Guidelines for Label Contents

Each board shall have a unique label for identification. The label information shall be both in human readable and machine readable formats (linear or 2D data matrix). The labels may include:

- Serial number
- Part Number
- MAC Address
- Manufacturing Date
- Manufacturing Site Information

#### Barcode Requirements

- Linear Barcodes
- Code 93, Code 128 Auto or Code 128 Subset B
- Minimum narrow bar width  $X \geq 5\text{mil}$  (0.127mm)
- 2D data matrix
- Data matrix shall use ECC200 error correction
- Minimum cell size  $X \geq 10\text{mil}$  (0.254mm)
- All linear barcode and data matrix labels shall meet the contrast and print growth requirements per ISO/IEC 16022
- All linear barcode and data matrix labels shall have a quality level C or higher per ISO/IER 15415
- All linear barcode and data matrix labels shall define a minimum Quiet Zone (QZ) to ensure the label is correctly registered by the scanner per ISO/IEC 15415
- Linear barcode labels shall use a QZ that is 10 times the width of the narrowest bar or 1/8<sup>th</sup> inch, whichever is greater.
- Data matrix labels shall have a Quiet Zone (QZ) that is at least one module (X dimension) around the perimeter of the data matrix.
- Multiple Serial Numbers, MAC address may exist in one 2D data matrix, each separated by a comma

#### Human Readable Font

- Arial or printer font equivalent
- Minimum 5 point font size. 3 point font is acceptable when using 600 DPI printers
- Text must be easily legible under normal lighting 6-to-8 inches away.

The label size and typeface may vary based on each vendor and/or customer's label content and requirements.

### 2.9.2 MAC Address Labeling Requirements

For an OCP NIC 3.0 card with  $m$  line side interfaces and  $n$  RBT management interfaces, the MAC address label shall list the MAC addresses in sequential order starting with line side port 1 to port  $m$  followed by the controller #0 MAC address to controller  $n$ . For cards that support multi-host configurations, the label shall associate each MAC address with a host number. The examples below show the MAC addresses presented as a single column, for labels with many MAC addresses, the label may also be formatted in multiple columns for greater readability.

#### 2.9.2.1 MAC Address Label Example 1 – Quad Port with Single Host, Single Managed Controller

As an example, the label content of a quad SFP OCP NIC 3.0 card with a single management MAC address shall be constructed to show human readable data per the Label Data column of Table 9. The

constructed label is shown in Figure 57. For each human readable line, there is a MAC prefix “Px:” for a line side Port, or “MEx:” for a managed controller instance, followed by the MAC address. The port/controller association for each row is shown in the far right column.

Table 9: MAC Address Label Example 1 – Quad Port with Single Host, Single Managed Controller

| Label Data             | MAC Prefix | MAC Address       | Association   |
|------------------------|------------|-------------------|---------------|
| P1: AA.BB.CC.DD.EE.F0  | P1:        | AA.BB.CC.DD.EE.F0 | Port 1        |
| P2: AA.BB.CC.DD.EE.F1  | P2:        | AA.BB.CC.DD.EE.F1 | Port 2        |
| P3: AA.BB.CC.DD.EE.F2  | P3:        | AA.BB.CC.DD.EE.F2 | Port 3        |
| P4: AA.BB.CC.DD.EE.F3  | P4:        | AA.BB.CC.DD.EE.F3 | Port 4        |
| ME1: AA.BB.CC.DD.EE.F4 | ME1:       | AA.BB.CC.DD.EE.F4 | Controller #0 |

Figure 57: MAC Address Label Example 1 – Quad Port with Single Host, Single Managed Controller




### 2.9.2.2 MAC Address Label Example 2 – Octal Port with Single Host, Dual Managed Controllers

As a second example, the label content of an octal port (2xQSFP with “breakout” support) OCP NIC 3.0 card with two managed silicon instances is constructed per Table 10. The constructed label is shown in Figure 58. The MAC address label shall also list the four MAC addresses associated with QSFP lanes [1:4] for QSFP connectors that allow “breakout” modes. The Host-MAC address presentation may also be formatted horizontally for easier readability.

Table 10: MAC Address Label Example 2 – Octal Port with Single Host, Dual Managed Controller

| Label Data             | MAC Prefix | MAC Address       | Association   |
|------------------------|------------|-------------------|---------------|
| P1: AA.BB.CC.DD.EE.F0  | P1:        | AA.BB.CC.DD.EE.F0 | QSFP1, Port 1 |
| P2: AA.BB.CC.DD.EE.F1  | P2:        | AA.BB.CC.DD.EE.F1 | QSFP1, Port 2 |
| P3: AA.BB.CC.DD.EE.F2  | P3:        | AA.BB.CC.DD.EE.F2 | QSFP1, Port 3 |
| P4: AA.BB.CC.DD.EE.F3  | P4:        | AA.BB.CC.DD.EE.F3 | QSFP1, Port 4 |
| P5: AA.BB.CC.DD.EE.F4  | P5:        | AA.BB.CC.DD.EE.F4 | QSFP2, Port 5 |
| P6: AA.BB.CC.DD.EE.F5  | P6:        | AA.BB.CC.DD.EE.F5 | QSFP2, Port 6 |
| P7: AA.BB.CC.DD.EE.F6  | P7:        | AA.BB.CC.DD.EE.F6 | QSFP2, Port 7 |
| P8: AA.BB.CC.DD.EE.F7  | P8:        | AA.BB.CC.DD.EE.F7 | QSFP2, Port 8 |
| ME1: AA.BB.CC.DD.EE.F8 | ME1:       | AA.BB.CC.DD.EE.F8 | Controller #0 |
| ME2: AA.BB.CC.DD.EE.F9 | ME2:       | AA.BB.CC.DD.EE.F9 | Controller #1 |

Figure 58: MAC Address Label Example 2 – Octal Port with Single Host, Dual Managed Controller

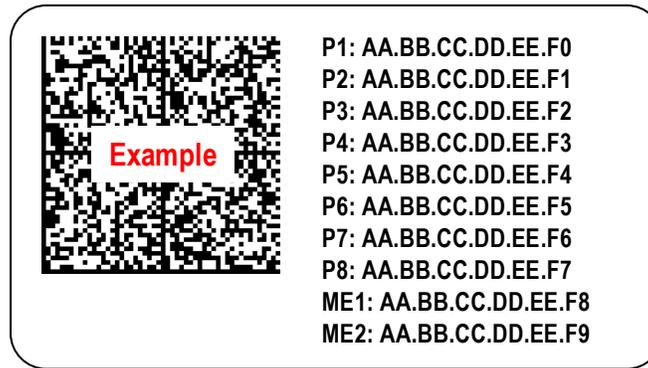


### 2.9.2.3 MAC Address Label Example 3 – Quad Port with Dual Hosts, Dual Managed Controllers

For multi-host implementations, each MAC address shall be prefixed with the host association “Hx” prior to the port number, where x represents the host number. An example of this is shown in Table 11 and Figure 59.

Table 11: MAC Address Label Example 3 – Quad Port with Dual Hosts, Dual Managed Controller

| Label Data             | Host | MAC Prefix | MAC Address       | Association   |
|------------------------|------|------------|-------------------|---------------|
| P1: AA.BB.CC.DD.EE.F0  | H1   | P1:        | AA.BB.CC.DD.EE.F0 | Port 1        |
| P2: AA.BB.CC.DD.EE.F1  | H1   | P2:        | AA.BB.CC.DD.EE.F1 | Port 2        |
| P3: AA.BB.CC.DD.EE.F2  | H2   | P3:        | AA.BB.CC.DD.EE.F2 | Port 3        |
| P4: AA.BB.CC.DD.EE.F3  | H2   | P4:        | AA.BB.CC.DD.EE.F3 | Port 4        |
| ME1: AA.BB.CC.DD.EE.F4 | n/a  | ME1:       | AA.BB.CC.DD.EE.F4 | Controller #0 |
| ME2: AA.BB.CC.DD.EE.F5 | n/a  | ME2:       | AA.BB.CC.DD.EE.F5 | Controller #1 |

Figure 59: MAC Address Label Example 3 – Quad Port with Dual Hosts, Dual Managed Controllers

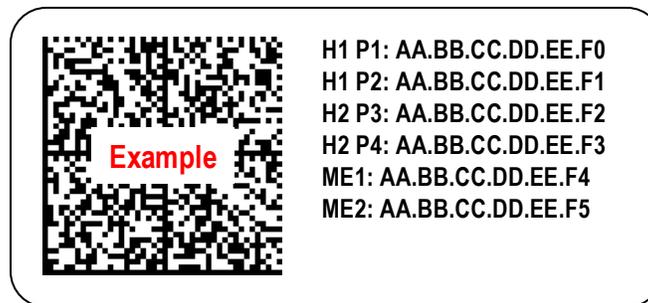


### 2.9.2.4 MAC Address Label Example 4 – Single Port with Quad Host, Single Managed Controller

The following example shows a single port device with quad hosts. To conserve space on the MAC address label, this example only shows the MAC addresses for Port 1 through Port 4. The MAC address for each managed host is Px+1. This is shown in Table 12 and Figure 60.

Table 12: MAC Address Label Example 4 – Single Port with Quad Host, Single Managed Controller

| Label Data             | Host | MAC Prefix | MAC Address       | Association |
|------------------------|------|------------|-------------------|-------------|
| P1: AA.BB.CC.DD.EE.F0  | H1   | P1:        | AA.BB.CC.DD.EE.F0 | Port 1      |
| ME1: AA.BB.CC.DD.EE.F1 | ME1  | P1:        | AA.BB.CC.DD.EE.F1 | Port 1      |
| P2: AA.BB.CC.DD.EE.F2  | H2   | P1:        | AA.BB.CC.DD.EE.F2 | Port 1      |
| ME2: AA.BB.CC.DD.EE.F3 | ME2  | P1:        | AA.BB.CC.DD.EE.F3 | Port 1      |
| P3: AA.BB.CC.DD.EE.F4  | H3   | P1:        | AA.BB.CC.DD.EE.F4 | Port 1      |
| ME3: AA.BB.CC.DD.EE.F5 | ME3  | P1:        | AA.BB.CC.DD.EE.F5 | Port 1      |
| P4: AA.BB.CC.DD.EE.F6  | H4   | P1:        | AA.BB.CC.DD.EE.F6 | Port 1      |
| ME4: AA.BB.CC.DD.EE.F7 | ME4  | P1:        | AA.BB.CC.DD.EE.F7 | Port 1      |

Figure 60: MAC Address Label Example 4 – Single Port with Quad Host, Single Managed Controller

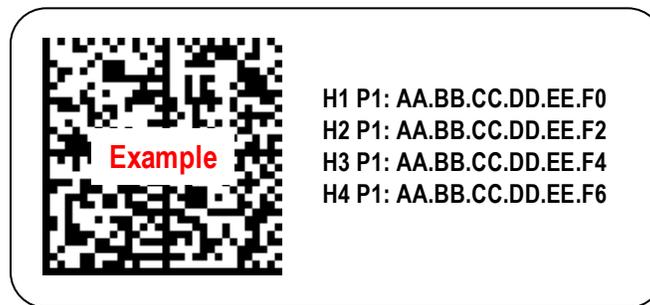

## 2.10 Mechanical CAD Package Examples

Typical OCP NIC 3.0 implementation examples are included in the 3D CAD package. The purpose of these examples is to demonstrate the implementation feasibility. Additional use cases beyond the implementation examples are possible as long they adhere to the OCP NIC 3.0 specification.

**Note:** For brevity, references to QSFP+, and QSFP28 shall be referred to as QSFP in this document. Similarly, references to SFP+, and SFP28 shall be referred to as SFP.

The 3D CAD files may be obtained from the OCP NIC 3.0 Wiki:

<http://www.opencompute.org/wiki/Server/Mezz>

Table 13: NIC Implementation Examples and 3D CAD

| Implementation Example                   | 3D CAD File name  |
|--|---|
| Small form factor Single/Dual QSFP ports | 01_nic_v3_sff2q_1tab_asm.stp<br>01_nic_v3_sff2q_latch_asm.stp |
| Small form factor Single/Dual SFP ports  | N/A   |
| Small form factor Quad SFP ports         | 01_nic_v3_sff4s_1tab_asm.stp<br>01_nic_v3_sff4s_latch_asm.stp |
| Small form factor Quad 10GBASE-T ports   | 01_nic_v3_sff4r_1tab_asm.stp<br>01_nic_v3_sff4r_latch_asm.stp |
| Large form factor Single/Dual QSFP ports | 01_nic_v3_lff2q_asm.stp                                       |
| Large form factor Single/Dual SFP ports  | N/A   |
| Large form factor Quad SFP ports         | 01_nic_v3_lff4s_asm.stp                                       |
| Large form factor Quad 10GBASE-T ports   | 01_nic_v3_lff4r_asm.stp                                       |

### 3 Electrical Interface Definition – Card Edge and Baseboard

#### 3.1 Card Edge Gold Finger Requirements

The OCP NIC 3.0 cards are compliant to the SFF-TA-1002 specification with respect to the gold fingers and connectors.

Small Size cards fit in the Primary Connector. Primary Connector compliant cards are 76mm x 115mm and may implement the full 168-pins. The Primary Connector cards may optionally implement a subset of gold finger pins if there is a reduced PCIe width requirement (such as 1 x8 and below). In this case, the card edge gold finger may implement a 2C design. The overall board thickness is 1.57mm. The gold finger dimensions for the Primary Connector compliant cards are shown below.

Large Size Cards support up to a x32 PCIe implementation and may use both the Primary and Secondary (4C) Connectors. Large Size Cards may implement a reduced PCIe lane count and optionally implement only the Primary Connector 4C+, or 2C OCP bay.

Note: The “B” pins on the connector are associated with the top side of the OCP NIC 3.0 card. The “A” pins on the connector are associated with the bottom side of the OCP NIC 3.0 card. The A and B side pins are physically on top of each other with zero x-axis offset.

Figure 61: SFF Primary Connector Gold Finger Dimensions – x16 – Top Side (“B” Pins)

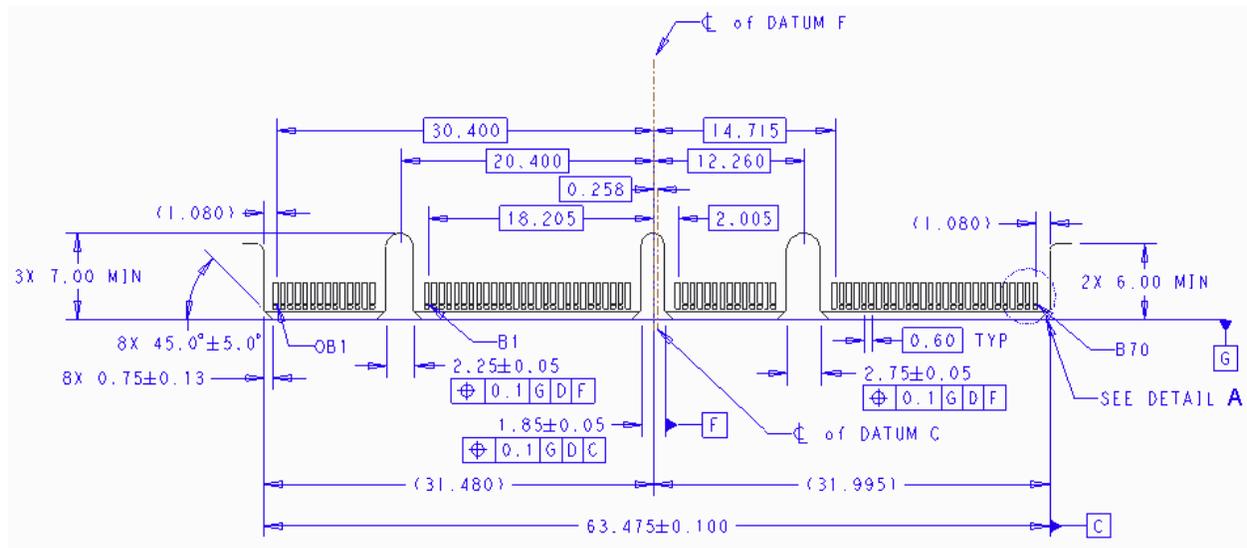


Figure 62: LFF Gold Finger Dimensions – x32 – Top Side (“B” Pins)


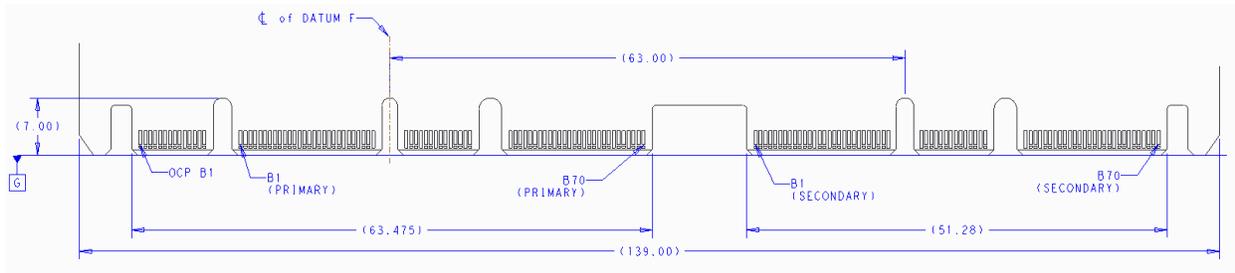


Figure 63: LFF Gold Finger Dimensions – x32 – Bottom Side (“A” Pins)

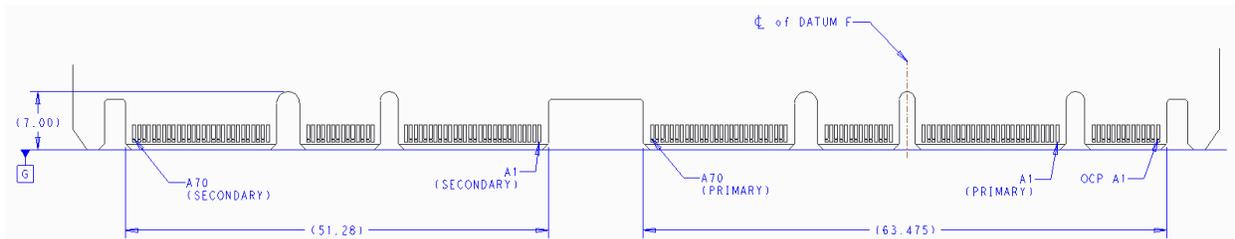

### 3.1.1 Gold Finger Mating Sequence

Per the SFF-TA-1002 specification, the Primary and Secondary Connectors are protocol agnostic and are optimized for high speed differential pairs. For use in the OCP NIC 3.0 application, some pin locations are used for single ended control nets or power and would benefit from a shorter pin length for staggering. As such, the required OCP NIC 3.0 card gold finger staging is shown in Table 14 for a two stage, first-mate, last-break functionality. The two-stage finger length is a normative requirement for the OCP NIC 3.0 card. The host connectors have a single stage mating and do not implement different pin lengths.

The AIC Plug (Free) side refers to the OCP NIC 3.0 card gold fingers; the receptacle (Fixed) side refers to the physical connector on the host platform. This table is based on the SFF-TA-1002 Table A-1 with modifications for OCP NIC 3.0. Refer to the mechanical drawings for pin the first-mate and second-mate lengths.

Note: Pin names in Table 14 and Table 15 are used for first mate/second mate reference only. Full pin definitions are described in Sections 3.3 and 3.4.

Table 14: Contact Mating Positions for the Primary Connector

| Side B                  |                      |                    | Side A                  |                      |                    |  |
|-------------------------|----------------------|--------------------|-------------------------|----------------------|--------------------|--|
| Gold Finger Side (Free) |                      | Receptacle (Fixed) | Gold Finger Side (Free) |                      | Receptacle (Fixed) |  |
| 2 <sup>nd</sup> Mate    | 1 <sup>st</sup> Mate |                    | 2 <sup>nd</sup> Mate    | 1 <sup>st</sup> Mate |                    |  |
| OCP B1                  | NIC_PWR_GOOD         |                    | OCP A1                  | PERST2#              |                    |  |
| OCP B2                  | MAIN_PWR_EN          |                    | OCP A2                  | PERST3#              |                    |  |
| OCP B3                  | LD#                  |                    | OCP A3                  | WAKE#                |                    |  |
| OCP B4                  | DATA_IN              |                    | OCP A4                  | RBT_ARB_IN           |                    |  |
| OCP B5                  | DATA_OUT             |                    | OCP A5                  | RBT_ARB_OUT          |                    |  |
| OCP B6                  | CLK                  |                    | OCP A6                  | SLOT_ID1             |                    |  |
| OCP B7                  | SLOT_ID0             |                    | OCP A7                  | RBT_TX_EN            |                    |  |
| OCP B8                  | RBT_RXD1             |                    | OCP A8                  | RBT_TXD1             |                    |  |
| OCP B9                  | RBT_RXD0             |                    | OCP A9                  | RBT_TXD0             |                    |  |
| OCP B10                 | GND                  |                    | OCP A10                 | GND                  |                    |  |
| OCP B11                 | REFCLKn2             |                    | OCP A11                 | REFCLKn3             |                    |  |
| OCP B12                 | REFCLKp2             |                    | OCP A12                 | REFCLKp3             |                    |  |
| OCP B13                 | GND                  |                    | OCP A13                 | GND                  |                    |  |

| OCP B14               | RBT_CRS_DV |  | OCP A14 | RBT_CLK_IN |
|-----------------------|------------|--|---------|------------|
| <b>Mechanical Key</b> |            |  |         |            |
| B1                    | +12V_EDGE  |  | A1      | GND        |
| B2                    | +12V_EDGE  |  | A2      | GND        |
| B3                    | +12V_EDGE  |  | A3      | GND        |
| B4                    | +12V_EDGE  |  | A4      | GND        |
| B5                    | +12V_EDGE  |  | A5      | GND        |
| B6                    | +12V_EDGE  |  | A6      | GND        |
| B7                    | BIF0#      |  | A7      | SMCLK      |
| B8                    | BIF1#      |  | A8      | SMDAT      |
| B9                    | BIF2#      |  | A9      | SMRST#     |
| B10                   | PERST0#    |  | A10     | PRNSTA#    |
| B11                   | +3.3V_EDGE |  | A11     | PERST1#    |
| B12                   | AUX_PWR_EN |  | A12     | PRNSTB2#   |
| B13                   | GND        |  | A13     | GND        |
| B14                   | REFCLKn0   |  | A14     | REFCLKn1   |
| B15                   | REFCLKp0   |  | A15     | REFCLKp1   |
| B16                   | GND        |  | A16     | GND        |
| B17                   | PETn0      |  | A17     | PERn0      |
| B18                   | PETp0      |  | A18     | PERp0      |
| B19                   | GND        |  | A19     | GND        |
| B20                   | PETn1      |  | A20     | PERn1      |
| B21                   | PETp1      |  | A21     | PERp1      |
| B22                   | GND        |  | A22     | GND        |
| B23                   | PETn2      |  | A23     | PERn2      |
| B24                   | PETp2      |  | A24     | PERp2      |
| B25                   | GND        |  | A25     | GND        |
| B26                   | PETn3      |  | A26     | PERn3      |
| B27                   | PETp3      |  | A27     | PERp3      |
| B28                   | GND        |  | A28     | GND        |
| <b>Mechanical Key</b> |            |  |         |            |
| B29                   | GND        |  | A29     | GND        |
| B30                   | PETn4      |  | A30     | PERn4      |
| B31                   | PETp4      |  | A31     | PERp4      |
| B32                   | GND        |  | A32     | GND        |
| B33                   | PETn5      |  | A33     | PERn5      |
| B34                   | PETp5      |  | A34     | PERp5      |
| B35                   | GND        |  | A35     | GND        |
| B36                   | PETn6      |  | A36     | PERn6      |
| B37                   | PETp6      |  | A37     | PERp6      |
| B38                   | GND        |  | A38     | GND        |
| B39                   | PETn7      |  | A39     | PERn7      |
| B40                   | PETp7      |  | A40     | PERp7      |
| B41                   | GND        |  | A41     | GND        |
| B42                   | PRNSTB0#   |  | A42     | PRNSTB1#   |
| <b>Mechanical Key</b> |            |  |         |            |
| B43                   | GND        |  | A43     | GND        |
| B44                   | PETn8      |  | A44     | PERn8      |
| B45                   | PETp8      |  | A45     | PERp8      |
| B46                   | GND        |  | A46     | GND        |
| B47                   | PETn9      |  | A47     | PERn9      |
| B48                   | PETp9      |  | A48     | PERp9      |
| B49                   | GND        |  | A49     | GND        |
| B50                   | PETn10     |  | A50     | PERn10     |
| B51                   | PETp10     |  | A51     | PERp10     |
| B52                   | GND        |  | A52     | GND        |
| B53                   | PETn11     |  | A53     | PERn11     |
| B54                   | PETp11     |  | A54     | PERp11     |
| B55                   | GND        |  | A55     | GND        |
| B56                   | PETn12     |  | A56     | PERn12     |
| B57                   | PETp12     |  | A57     | PERp12     |
| B58                   | GND        |  | A58     | GND        |
| B59                   | PETn13     |  | A59     | PERn13     |
| B60                   | PETp13     |  | A60     | PERp13     |
| B61                   | GND        |  | A61     | GND        |
| B62                   | PETn14     |  | A62     | PERn14     |
| B63                   | PETp14     |  | A63     | PERp14     |
| B64                   | GND        |  | A64     | GND        |
| B65                   | PETn15     |  | A65     | PERn15     |
| B66                   | PETp15     |  | A66     | PERp15     |
| B67                   | GND        |  | A67     | GND        |

|     |           |  |     |          |  |
|-----|-----------|--|-----|----------|--|
| B68 | RFU1, N/C |  | A68 | USB_DATn |  |
| B69 | RFU2, N/C |  | A69 | USB_DATp |  |
| B70 | PRSNB3#   |  | A70 | PWRBRK#  |  |

Table 15: Contact Mating Positions for the Secondary Connector

| Side B                  |                      |                      | Receptacle<br>(Fixed) | Side A                  |                      |                       |
|-------------------------|----------------------|----------------------|-----------------------|-------------------------|----------------------|-----------------------|
| Gold Finger Side (Free) |                      | 1 <sup>st</sup> Mate |                       | Gold Finger Side (Free) |                      | Receptacle<br>(Fixed) |
| 2 <sup>nd</sup> Mate    | 1 <sup>st</sup> Mate |                      |                       | 2 <sup>nd</sup> Mate    | 1 <sup>st</sup> Mate |                       |
| B1                      | +12V_EDGE            |                      | A1                    | GND                     |                      |                       |
| B2                      | +12V_EDGE            |                      | A2                    | GND                     |                      |                       |
| B3                      | +12V_EDGE            |                      | A3                    | GND                     |                      |                       |
| B4                      | +12V_EDGE            |                      | A4                    | GND                     |                      |                       |
| B5                      | +12V_EDGE            |                      | A5                    | GND                     |                      |                       |
| B6                      | +12V_EDGE            |                      | A6                    | GND                     |                      |                       |
| B7                      | BIF0#                |                      | A7                    | SMCLK                   |                      |                       |
| B8                      | BIF1#                |                      | A8                    | SMDAT                   |                      |                       |
| B9                      | BIF2#                |                      | A9                    | SMRST#                  |                      |                       |
| B10                     | PERST0#              |                      | A10                   | PRSNB1#                 |                      |                       |
| B11                     | +3.3V_EDGE           |                      | A11                   | PERST1#                 |                      |                       |
| B12                     | AUX_PWR_EN           |                      | A12                   | PRSNB2#                 |                      |                       |
| B13                     | GND                  |                      | A13                   | GND                     |                      |                       |
| B14                     | REFCLKn0             |                      | A14                   | REFCLKn1                |                      |                       |
| B15                     | REFCLKp0             |                      | A15                   | REFCLKp1                |                      |                       |
| B16                     | GND                  |                      | A16                   | GND                     |                      |                       |
| B17                     | PETn0                |                      | A17                   | PERn0                   |                      |                       |
| B18                     | PETp0                |                      | A18                   | PERp0                   |                      |                       |
| B19                     | GND                  |                      | A19                   | GND                     |                      |                       |
| B20                     | PETn1                |                      | A20                   | PERn1                   |                      |                       |
| B21                     | PETp1                |                      | A21                   | PERp1                   |                      |                       |
| B22                     | GND                  |                      | A22                   | GND                     |                      |                       |
| B23                     | PETn2                |                      | A23                   | PERn2                   |                      |                       |
| B24                     | PETp2                |                      | A24                   | PERp2                   |                      |                       |
| B25                     | GND                  |                      | A25                   | GND                     |                      |                       |
| B26                     | PETn3                |                      | A26                   | PERn3                   |                      |                       |
| B27                     | PETp3                |                      | A27                   | PERp3                   |                      |                       |
| B28                     | GND                  |                      | A28                   | GND                     |                      |                       |
| <b>Mechanical Key</b>   |                      |                      |                       |                         |                      |                       |
| B29                     | GND                  |                      | A29                   | GND                     |                      |                       |
| B30                     | PETn4                |                      | A30                   | PERn4                   |                      |                       |
| B31                     | PETp4                |                      | A31                   | PERp4                   |                      |                       |
| B32                     | GND                  |                      | A32                   | GND                     |                      |                       |
| B33                     | PETn5                |                      | A33                   | PERn5                   |                      |                       |
| B34                     | PETp5                |                      | A34                   | PERp5                   |                      |                       |
| B35                     | GND                  |                      | A35                   | GND                     |                      |                       |
| B36                     | PETn6                |                      | A36                   | PERn6                   |                      |                       |
| B37                     | PETp6                |                      | A37                   | PERp6                   |                      |                       |
| B38                     | GND                  |                      | A38                   | GND                     |                      |                       |
| B39                     | PETn7                |                      | A39                   | PERn7                   |                      |                       |
| B40                     | PETp7                |                      | A40                   | PERp7                   |                      |                       |
| B41                     | GND                  |                      | A41                   | GND                     |                      |                       |
| B42                     | PRSNB0#              |                      | A42                   | PRSNB1#                 |                      |                       |
| <b>Mechanical Key</b>   |                      |                      |                       |                         |                      |                       |
| B43                     | GND                  |                      | A43                   | GND                     |                      |                       |
| B44                     | PETn8                |                      | A44                   | PERn8                   |                      |                       |
| B45                     | PETp8                |                      | A45                   | PERp8                   |                      |                       |
| B46                     | GND                  |                      | A46                   | GND                     |                      |                       |
| B47                     | PETn9                |                      | A47                   | PERn9                   |                      |                       |
| B48                     | PETp9                |                      | A48                   | PERp9                   |                      |                       |
| B49                     | GND                  |                      | A49                   | GND                     |                      |                       |
| B50                     | PETn10               |                      | A50                   | PERn10                  |                      |                       |
| B51                     | PETp10               |                      | A51                   | PERp10                  |                      |                       |
| B52                     | GND                  |                      | A52                   | GND                     |                      |                       |
| B53                     | PETn11               |                      | A53                   | PERn11                  |                      |                       |
| B54                     | PETp11               |                      | A54                   | PERp11                  |                      |                       |
| B55                     | GND                  |                      | A55                   | GND                     |                      |                       |
| B56                     | PETn12               |                      | A56                   | PERn12                  |                      |                       |
| B57                     | PETp12               |                      | A57                   | PERp12                  |                      |                       |
| B58                     | GND                  |                      | A58                   | GND                     |                      |                       |
| B59                     | PETn13               |                      | A59                   | PERn13                  |                      |                       |

|     |           |  |  |     |         |  |  |
|-----|-----------|--|--|-----|---------|--|--|
| B60 | PETp13    |  |  | A60 | PERp13  |  |  |
| B61 | GND       |  |  | A61 | GND     |  |  |
| B62 | PETn14    |  |  | A62 | PERn14  |  |  |
| B63 | PETp14    |  |  | A63 | PERp14  |  |  |
| B64 | GND       |  |  | A64 | GND     |  |  |
| B65 | PETn15    |  |  | A65 | PERn15  |  |  |
| B66 | PETp15    |  |  | A66 | PERp15  |  |  |
| B67 | GND       |  |  | A67 | GND     |  |  |
| B68 | RFU1, N/C |  |  | A68 | UART_RX |  |  |
| B69 | RFU2, N/C |  |  | A69 | UART_TX |  |  |
| B70 | PRSNTB3#  |  |  | A70 | PWRBRK# |  |  |

## 3.2 Baseboard Connector Requirements

The OCP NIC 3.0 connectors are compliant to the “4C+” and “4C” connectors as defined in the SFF-TA-1002 specification for a right angle or straddle mount form-factor. The Primary Connector is a 4C+ implementation with 168-pins. The Secondary Connector is a 4C implementation with 140-pins. Both the Primary and Secondary Connectors includes support for up to 32 differential pairs to support a x16 PCIe connection. Each connector also provides 6 pins of +12V\_EDGE, and 1 pin of +3.3V\_EDGE for power. This implementation is common between both the Primary and Secondary Connectors. In addition, the 4C+ implementation of the Primary Connector has a 28-pin OCP Bay used for management and support for up to a 4 x2 and 4 x4 multi-host configuration on the Primary Connector. The Primary and Secondary Connector drawings are shown below.

All diagram units are in mm unless otherwise noted.

### 3.2.1 Right Angle Connector

The following offset and height options are available for the right angle Primary and Secondary Connectors.

Table 16: Right Angle Connector Options

| Name                     | Pins     | Style and Baseboard Thickness | Offset (mm) |
|--------------------------|----------|-------------------------------|-------------|
| Primary Connector – 4C+  | 168 pins | Right Angle                   | 4.05mm      |
| Secondary Connector – 4C | 140 pins | Right Angle                   | 4.05mm      |

Figure 64: 168-pin Base Board Primary Connector – Right Angle


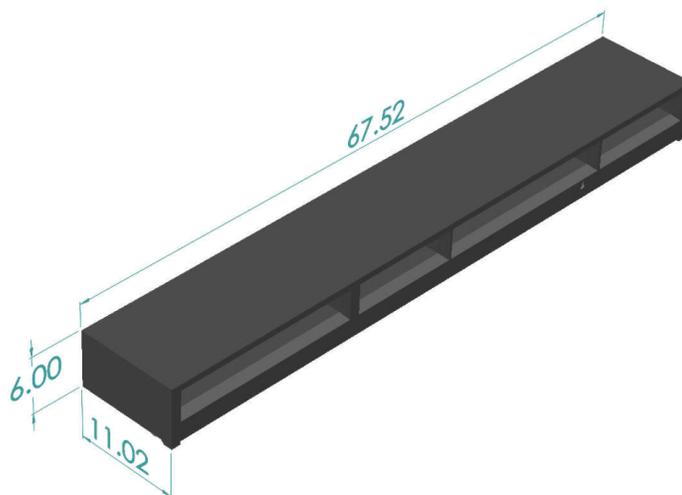



Figure 65: 140-pin Base Board Secondary Connector – Right Angle

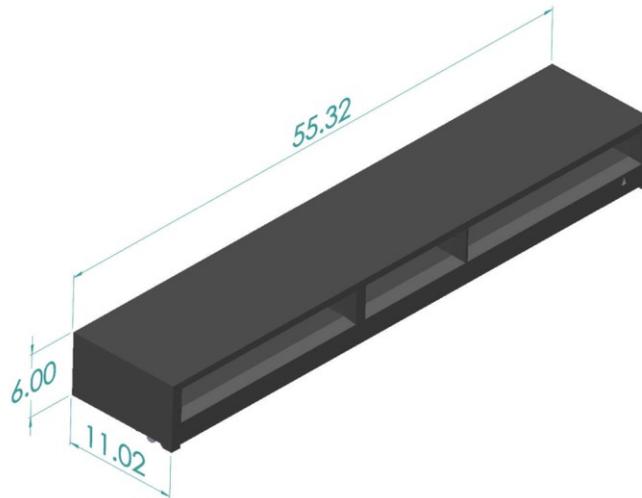

### 3.2.2 Right Angle Offset

The OCP NIC 3.0 right angle connectors have a 4.05mm offset from the baseboard (pending SI simulation results). This is shown in Figure 66.

Figure 66: OCP NIC 3.0 Card and Host Offset for Right Angle Connectors

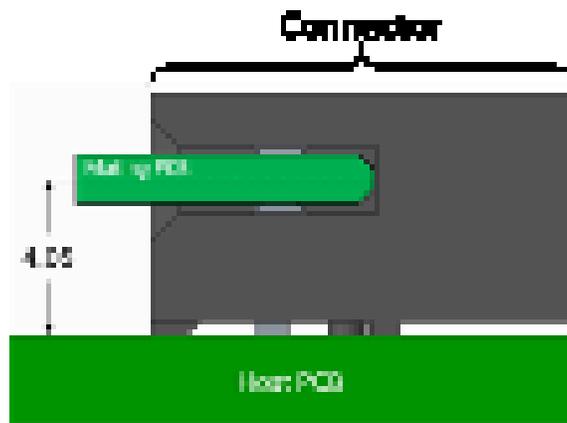

### 3.2.3 Straddle Mount Connector

The following offset and height options are available for the straddle mount Primary and Secondary Connectors.

Table 17: Straddle Mount Connector Options

| Name                     | Pins     | Style and Baseboard Thickness | Offset (mm)    |
|--------------------------|----------|-------------------------------|----------------|
| Primary Connector – 4C+  | 168 pins | Straddle Mount for 0.062"     | Coplanar (0mm) |
| Primary Connector – 4C+  | 168 pins | Straddle Mount for 0.076"     | -0.3mm         |
| Primary Connector – 4C+  | 168 pins | Straddle Mount for 0.093"     | Coplanar (0mm) |
| Secondary Connector – 4C | 140 pins | Straddle Mount for 0.062"     | Coplanar (0mm) |
| Secondary Connector – 4C | 140 pins | Straddle Mount for 0.076"     | -0.3mm         |

|                          |          |                           |                |
|--------------------------|----------|---------------------------|----------------|
| Secondary Connector – 4C | 140 pins | Straddle Mount for 0.093" | Coplanar (0mm) |
|--------------------------|----------|---------------------------|----------------|

Figure 67: 168-pin Base Board Primary Connector – Straddle Mount


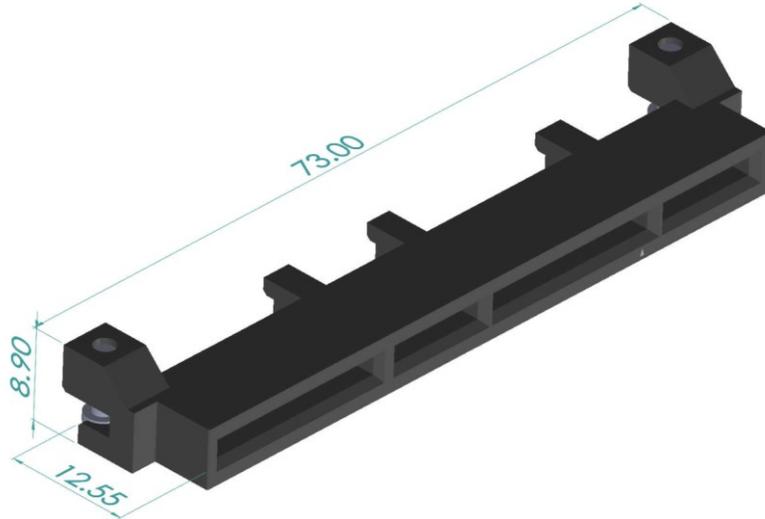



Figure 68: 140-pin Base Board Secondary Connector – Straddle Mount

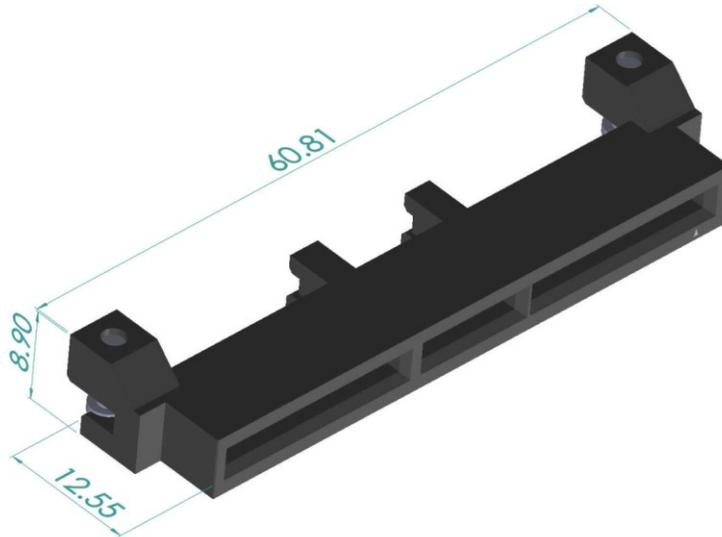

### 3.2.4 Straddle Mount Offset and PCB Thickness Options

The OCP NIC 3.0 straddle mount connectors have three baseboard PCB thicknesses they can accept. The available options are shown in Figure 69. The thicknesses are 0.062", 0.076", and 0.093". These PCBs must be controlled to a thickness of  $\pm 10\%$ . These are available for both the Primary and Secondary Connector locations. At the time of this writing, the most commonly used part is expected to be the 0.076" baseboard thickness.

Figure 69: OCP NIC 3.0 Card and Baseboard PCB Thickness Options for Straddle Mount Connectors

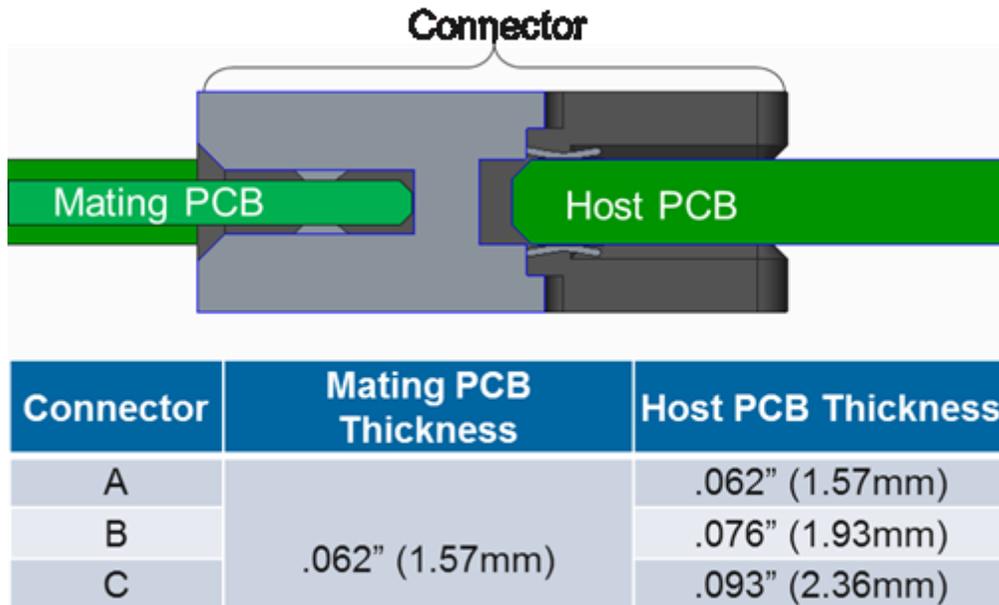

The connectors are capable of being used coplanar as shown in Figure 70. Additionally, the connectors are also capable of having a 0.3mm offset from the centerline of the host board as shown in Figure 71.

Figure 70: 0mm Offset (Coplanar) for 0.062" Thick Baseboards


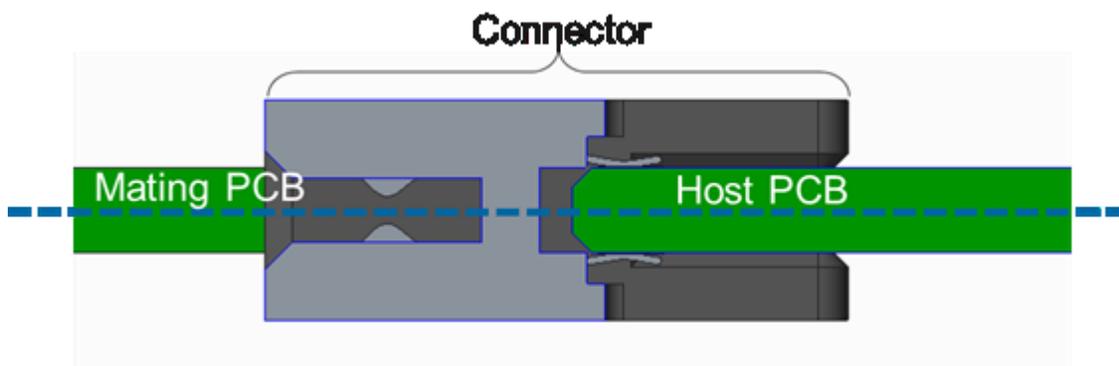


Figure 71: 0.3mm Offset for 0.076" Thick Baseboards

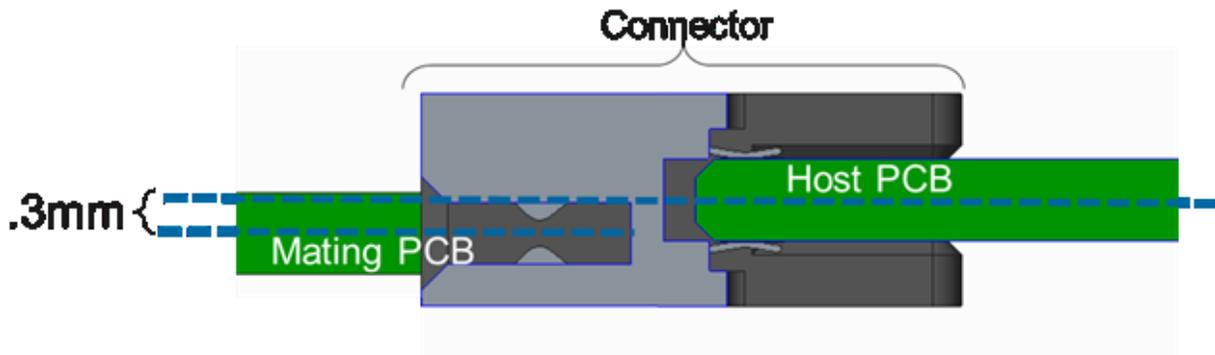

### 3.2.5 LFF Connector Locations

In order to support the large form factor, systems must locate the Primary and Secondary Connectors per the mechanical drawing shown in Figure 72 and Figure 73.

Figure 72: Primary and Secondary Connector Locations for LFF Support with Right Angle Connectors


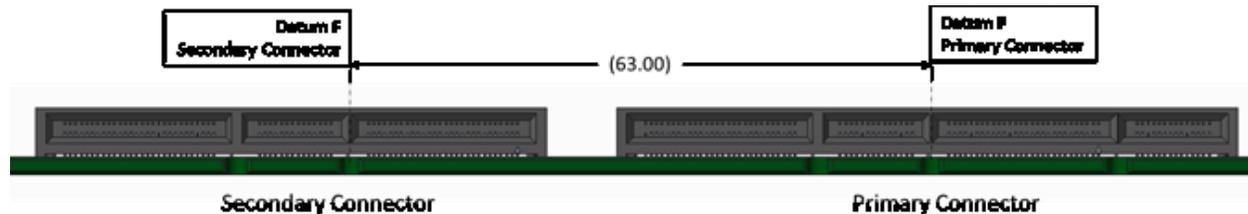


Figure 73: Primary and Secondary Connector Locations for LFF Support with Straddle Mount Connectors

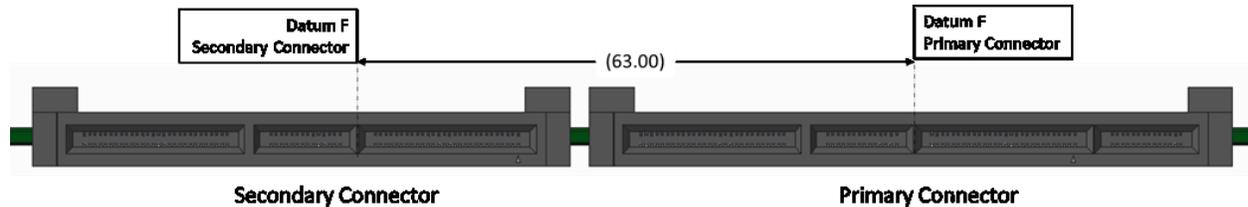

### 3.3 Pin Definition

The pin definitions of an OCP NIC 3.0 card with up to a x32 PCIe interface are shown in Table 18 and Table 19. All signal directions are shown from the perspective of the baseboard.

A baseboard system may provide a combination of Primary Connectors only, or Primary and Secondary Connectors to support multiple sizes of OCP NIC 3.0 cards. Both connectors share common functionality with power, SMBus 2.0, x16 PCIe and bifurcation control. The Primary Connector 4C+ definition has an additional OCP Bay (pins OCP\_A[1:14], OCP\_B[1:14]) with additional REFCLKs for supporting up to four PCIe hosts, NC-SI over RBT connectivity and a Scan Chain for information exchange between the host and card. The NIC is required to implement the Scan Chain, while the baseboard may choose to optionally implement it. Depending on the baseboard form-factor, multiple OCP NIC 3.0 compliant cards may be designed into the system.

The pins common to the Primary and Secondary Connectors are shown in Section 3.4. The OCP Bay pins on the Primary Connector only are explicitly called out with the prefix “OCP\_” in pin location column.

Cards or systems that do not require the use of a PCIe x16 connection may optionally implement a subset electrical connections as applicable to the design. For example, a x8 (or smaller) card using the first 8 PCIe lanes that is compliant with the Primary Connector pinout. Refer to Sections 3.1 and 3.2 for mechanical details. For these cases, the Primary Connector matches the 2C dimensions as defined in SFF-TA-1002.

In all cases, the physical baseboard connectors shall support x16 PCIe widths and must be implemented with the Primary (4C+) and Secondary (4C) connectors.

### 3.3.1 Primary Connector

Table 18: Primary Connector Pin Definition (x16) (4C+)

| Side B         |              | Side A      |         | Primary Connector (4C+, x16, 168-pin OCP NIC 3.0 card with OCP Bay) | Primary Connector (2C+, x8, 112-pin OCP NIC 3.0 card with OCP bay) |
|----------------|--------------|-------------|---------|---|--|
| OCP_B1         | NIC_PWR_GOOD | PERST2#     | OCP_A1  |   |  |
| OCP_B2         | MAIN_PWR_EN  | PERST3#     | OCP_A2  |   |  |
| OCP_B3         | LD#          | WAKE#       | OCP_A3  |   |  |
| OCP_B4         | DATA_IN      | RBT_ARB_IN  | OCP_A4  |   |  |
| OCP_B5         | DATA_OUT     | RBT_ARB_OUT | OCP_A5  |   |  |
| OCP_B6         | CLK          | SLOT_ID1    | OCP_A6  |   |  |
| OCP_B7         | SLOT_ID0     | RBT_TX_EN   | OCP_A7  |   |  |
| OCP_B8         | RBT_RXD1     | RBT_TXD1    | OCP_A8  |   |  |
| OCP_B9         | RBT_RXD0     | RBT_TXD0    | OCP_A9  |   |  |
| OCP_B10        | GND          | GND         | OCP_A10 |   |  |
| OCP_B11        | REFCLKn2     | REFCLKn3    | OCP_A11 |   |  |
| OCP_B12        | REFCLKp2     | REFCLKp3    | OCP_A12 |   |  |
| OCP_B13        | GND          | GND         | OCP_A13 |   |  |
| OCP_B14        | RBT_CRS_DV   | RBT_CLK_IN  | OCP_A14 |   |  |
| Mechanical Key |              |             |         |   |  |
| B1             | +12V_EDGE    | GND         | A1      |   |  |
| B2             | +12V_EDGE    | GND         | A2      |   |  |
| B3             | +12V_EDGE    | GND         | A3      |   |  |
| B4             | +12V_EDGE    | GND         | A4      |   |  |
| B5             | +12V_EDGE    | GND         | A5      |   |  |
| B6             | +12V_EDGE    | GND         | A6      |   |  |
| B7             | BIF0#        | SMCLK       | A7      |   |  |
| B8             | BIF1#        | SMDAT       | A8      |   |  |
| B9             | BIF2#        | SMRST#      | A9      |   |  |
| B10            | PERSTO#      | PRSNTA#     | A10     |   |  |
| B11            | +3.3V_EDGE   | PERST1#     | A11     |   |  |
| B12            | AUX_PWR_EN   | PRSNB2#     | A12     |   |  |
| B13            | GND          | GND         | A13     |   |  |
| B14            | REFCLKn0     | REFCLKn1    | A14     |   |  |
| B15            | REFCLKp0     | REFCLKp1    | A15     |   |  |
| B16            | GND          | GND         | A16     |   |  |
| B17            | PETn0        | PERn0       | A17     |   |  |
| B18            | PETp0        | PERp0       | A18     |   |  |
| B19            | GND          | GND         | A19     |   |  |
| B20            | PETn1        | PERn1       | A20     |   |  |
| B21            | PETp1        | PERp1       | A21     |   |  |
| B22            | GND          | GND         | A22     |   |  |

|                       |           |          |     |
|-----------------------|-----------|----------|-----|
| B23                   | PETn2     | PERn2    | A23 |
| B24                   | PETp2     | PERp2    | A24 |
| B25                   | GND       | GND      | A25 |
| B26                   | PETn3     | PERn3    | A26 |
| B27                   | PETp3     | PERp3    | A27 |
| B28                   | GND       | GND      | A28 |
| <b>Mechanical Key</b> |           |          |     |
| B29                   | GND       | GND      | A29 |
| B30                   | PETn4     | PERn4    | A30 |
| B31                   | PETp4     | PERp4    | A31 |
| B32                   | GND       | GND      | A32 |
| B33                   | PETn5     | PERn5    | A33 |
| B34                   | PETp5     | PERp5    | A34 |
| B35                   | GND       | GND      | A35 |
| B36                   | PETn6     | PERn6    | A36 |
| B37                   | PETp6     | PERp6    | A37 |
| B38                   | GND       | GND      | A38 |
| B39                   | PETn7     | PERn7    | A39 |
| B40                   | PETp7     | PERp7    | A40 |
| B41                   | GND       | GND      | A41 |
| B42                   | PRSNB0#   | PRSNB1#  | A42 |
| <b>Mechanical Key</b> |           |          |     |
| B43                   | GND       | GND      | A43 |
| B44                   | PETn8     | PERn8    | A44 |
| B45                   | PETp8     | PERp8    | A45 |
| B46                   | GND       | GND      | A46 |
| B47                   | PETn9     | PERn9    | A47 |
| B48                   | PETp9     | PERp9    | A48 |
| B49                   | GND       | GND      | A49 |
| B50                   | PETn10    | PERn10   | A50 |
| B51                   | PETp10    | PERp10   | A51 |
| B52                   | GND       | GND      | A52 |
| B53                   | PETn11    | PERn11   | A53 |
| B54                   | PETp11    | PERp11   | A54 |
| B55                   | GND       | GND      | A55 |
| B56                   | PETn12    | PERn12   | A56 |
| B57                   | PETp12    | PERp12   | A57 |
| B58                   | GND       | GND      | A58 |
| B59                   | PETn13    | PERn13   | A59 |
| B60                   | PETp13    | PERp13   | A60 |
| B61                   | GND       | GND      | A61 |
| B62                   | PETn14    | PERn14   | A62 |
| B63                   | PETp14    | PERp14   | A63 |
| B64                   | GND       | GND      | A64 |
| B65                   | PETn15    | PERn15   | A65 |
| B66                   | PETp15    | PERp15   | A66 |
| B67                   | GND       | GND      | A67 |
| B68                   | RFU1, N/C | USB_DATn | A68 |
| B69                   | RFU2, N/C | USB_DATp | A69 |
| B70                   | PRSNB3#   | PWRBRK#  | A70 |

### 3.3.2 Secondary Connector

Table 19: Secondary Connector Pin Definition (x16) (4C)

| Side B                |            | Side A   |     |
|-----------------------|------------|----------|-----|
| B1                    | +12V_EDGE  | GND      | A1  |
| B2                    | +12V_EDGE  | GND      | A2  |
| B3                    | +12V_EDGE  | GND      | A3  |
| B4                    | +12V_EDGE  | GND      | A4  |
| B5                    | +12V_EDGE  | GND      | A5  |
| B6                    | +12V_EDGE  | GND      | A6  |
| B7                    | BIF0#      | SMCLK    | A7  |
| B8                    | BIF1#      | SMDAT    | A8  |
| B9                    | BIF2#      | SMRST#   | A9  |
| B10                   | PERST0#    | PRSNTA#  | A10 |
| B11                   | +3.3V_EDGE | PERST1#  | A11 |
| B12                   | AUX_PWR_EN | PRSNTB2# | A12 |
| B13                   | GND        | GND      | A13 |
| B14                   | REFCLKn0   | REFCLKn1 | A14 |
| B15                   | REFCLKp0   | REFCLKp1 | A15 |
| B16                   | GND        | GND      | A16 |
| B17                   | PETn0      | PERn0    | A17 |
| B18                   | PETp0      | PERp0    | A18 |
| B19                   | GND        | GND      | A19 |
| B20                   | PETn1      | PERn1    | A20 |
| B21                   | PETp1      | PERp1    | A21 |
| B22                   | GND        | GND      | A22 |
| B23                   | PETn2      | PERn2    | A23 |
| B24                   | PETp2      | PERp2    | A24 |
| B25                   | GND        | GND      | A25 |
| B26                   | PETn3      | PERn3    | A26 |
| B27                   | PETp3      | PERp3    | A27 |
| B28                   | GND        | GND      | A28 |
| <b>Mechanical Key</b> |            |          |     |
| B29                   | GND        | GND      | A29 |
| B30                   | PETn4      | PERn4    | A30 |
| B31                   | PETp4      | PERp4    | A31 |
| B32                   | GND        | GND      | A32 |
| B33                   | PETn5      | PERn5    | A33 |
| B34                   | PETp5      | PERp5    | A34 |
| B35                   | GND        | GND      | A35 |
| B36                   | PETn6      | PERn6    | A36 |
| B37                   | PETp6      | PERp6    | A37 |
| B38                   | GND        | GND      | A38 |
| B39                   | PETn7      | PERn7    | A39 |
| B40                   | PETp7      | PERp7    | A40 |
| B41                   | GND        | GND      | A41 |
| B42                   | PRSNTB0#   | PRSNTB1# | A42 |
| <b>Mechanical Key</b> |            |          |     |
| B43                   | GND        | GND      | A43 |
| B44                   | PETn8      | PERn8    | A44 |
| B45                   | PETp8      | PERp8    | A45 |
| B46                   | GND        | GND      | A46 |
| B47                   | PETn9      | PERn9    | A47 |
| B48                   | PETp9      | PERp9    | A48 |
| B49                   | GND        | GND      | A49 |

Secondary Connector (4C, x16, 140-pin OCP NIC 3.0 card)

|     |           |         |     |
|-----|-----------|---------|-----|
| B50 | PETn10    | PERn10  | A50 |
| B51 | PETp10    | PERp10  | A51 |
| B52 | GND       | GND     | A52 |
| B53 | PETn11    | PERn11  | A53 |
| B54 | PETp11    | PERp11  | A54 |
| B55 | GND       | GND     | A55 |
| B56 | PETn12    | PERn12  | A56 |
| B57 | PETp12    | PERp12  | A57 |
| B58 | GND       | GND     | A58 |
| B59 | PETn13    | PERn13  | A59 |
| B60 | PETp13    | PERp13  | A60 |
| B61 | GND       | GND     | A61 |
| B62 | PETn14    | PERn14  | A62 |
| B63 | PETp14    | PERp14  | A63 |
| B64 | GND       | GND     | A64 |
| B65 | PETn15    | PERn15  | A65 |
| B66 | PETp15    | PERp15  | A66 |
| B67 | GND       | GND     | A67 |
| B68 | RFU1, N/C | UART_RX | A68 |
| B69 | RFU2, N/C | UART_TX | A69 |
| B70 | PRSNB3#   | PWRBRK# | A70 |

### 3.4 Signal Descriptions

The pins shown in this section are common for both the Primary and Secondary Connectors unless otherwise noted. Pins that exist only for the Primary Connector OCP Bay are explicitly called out in the pin location column with the prefix “OCP\_xxx”. USB is only defined on the Primary Connector. UART is only defined on the secondary connector. All pin directions are from the perspective of the baseboard.

Note: The OCP NIC 3.0 card shall implement protection methods to prevent leakage or low impedance paths between the  $V_{AUX}$  and  $V_{MAIN}$  power domains in the event that a powered-down NIC is physically present in a powered-up baseboard. This specification provides example isolation implementations in the signal description text and appropriate figures. OCP NIC 3.0 implementers may choose to do a different implementation as long as the isolation requirements are met and the same result is achieved.

#### 3.4.1 PCIe Interface Pins

This section provides the pin assignments for the PCIe interface signals. The AC/DC specifications are defined in the PCIe CEM Specification, Rev 4.0. Example connection diagrams for are shown in Figure 90 and Figure 91.

Table 20: Pin Descriptions – PCIe

| Signal Name          | Pin #              | Baseboard Direction | Signal Description  |
|----------------------|--------------------|---------------------|---|
| REFCLKn0<br>REFCLKp0 | B14<br>B15         | Output              | PCIe compliant differential reference clock #0, #1, #2 and #3. 100MHz reference clocks are used for the OCP NIC 3.0 card PCIe core logic. |
| REFCLKn1<br>REFCLKp1 | A14<br>A15         | Output              |   |
| REFCLKn2<br>REFCLKp2 | OCP_B11<br>OCP_B12 | Output              | REFCLK0 is always available to all OCP NIC 3.0 cards. The card should not assume REFCLK1, REFCLK2 or                                      |

|                      |                    |        |  |
|----------------------|--------------------|--------|--|
| REFCLKn3<br>REFCLKp3 | OCP_A11<br>OCP_A12 | Output | <p>REFCLK3 are available until the bifurcation negotiation process is complete.</p> <p>For baseboards, the REFCLK0, REFCLK1, REFCLK2 and REFCLK3 signals shall be available at the connector for supported designs. Separate REFCLK0 and REFCLK1 instances are available for the Primary and Secondary connectors. REFCLK2 and REFCLK3 are only available on the Primary connector in the OCP Bay.</p> <ul style="list-style-type: none"> <li>REFCLK0 is required for all designs.</li> <li>REFCLK1, REFCLK2 and REFCLK3 are required for designs that support 2 <math>xn</math>, and 4 <math>xn</math> bifurcation implementations.</li> </ul> <p>Baseboards that implement REFCLK1, REFCLK2 and REFCLK3, should disable the appropriate REFCLKs not used by the OCP NIC 3.0 card.</p> <p>The baseboard shall not advertise the corresponding bifurcation modes if REFCLK1, REFCLK2 or REFCLK3 are not implemented.</p> <p>For OCP NIC 3.0 cards, the required REFCLKs shall be connected per the endpoint datasheet. Unused REFCLKs on the OCP NIC 3.0 card shall be left as a no connect.</p> <p><b>Note:</b> For cards that only support 1 x16, REFCLK0 is used. For cards that support 2 x8, REFCLK0 is used for the first eight PCIe lanes, and REFCLK1 is used for the second eight PCIe lanes. REFCLK2 and REFCLK3 are only used for cards that only support a four link PCIe bifurcation mode.</p> <p>Refer to Section 2.1 in the PCIe CEM Specification, Rev 4.0 for electrical details.</p> |
| PETn0<br>PETp0       | B17<br>B18         | Output | <p>Transmitter differential pairs [0:15]. These pins are connected from the baseboard transmitter differential pairs to the receiver differential pairs on the OCP NIC 3.0 card.</p> <p>The PCIe transmit pins shall be AC coupled on the baseboard with capacitors. The AC coupling capacitor value shall use the <math>C_{TX}</math> parameter value specified in the PCIe Base Specification Rev 4.0 Section 8.3.9.</p>   |
| PETn1<br>PETp1       | B20<br>B21         | Output |  |
| PETn2<br>PETp2       | B23<br>B24         | Output |  |
| PETn3<br>PETp3       | B26<br>B27         | Output |  |
| PETn4                | B30                | Output |  |

|        |     |        |   |
|--------|-----|--------|---|
| PETp4  | B31 |        | <p>For baseboards, the PET[0:15] signals are required at the connector.</p> <p>For OCP NIC 3.0 cards, the required PET[0:15] signals shall be connected to the endpoint silicon. For silicon that uses less than a x16 connection, the appropriate PET[0:15] signals shall be connected per the endpoint datasheet.</p> <p>Refer to Section 6.1 in the PCIe CEM Specification, Rev 4.0 for details.</p>   |
| PETn5  | B33 | Output |   |
| PETp5  | B34 |        |   |
| PETn6  | B36 | Output |   |
| PETp6  | B37 |        |   |
| PETn7  | B39 | Output |   |
| PETp7  | B40 |        |   |
| PETn8  | B44 | Output |   |
| PETp8  | B45 |        |   |
| PETn9  | B47 | Output |   |
| PETp9  | B48 |        |   |
| PETn10 | B50 | Output |   |
| PETp10 | B51 |        |   |
| PETn11 | B53 | Output |   |
| PETp11 | B54 |        |   |
| PETn12 | B56 | Output |   |
| PETp12 | B57 |        |   |
| PETn13 | B59 | Output |   |
| PETp13 | B60 |        |   |
| PETn14 | B62 | Output |   |
| PETp14 | B63 |        |   |
| PETn15 | B65 | Output |   |
| PETp15 | B66 |        |   |
| PERn0  | A17 | Input  | <p>Receiver differential pairs [0:15]. These pins are connected from the OCP NIC 3.0 card transmitter differential pairs to the receiver differential pairs on the baseboard.</p> <p>The PCIe receive pins shall be AC coupled on the OCP NIC 3.0 card with capacitors. The AC coupling capacitor value shall use the <math>C_{TX}</math> parameter value specified in the PCIe Base Specification Rev 4.0 Section 8.3.9.</p> <p>For baseboards, the PER[0:15] signals are required at the connector.</p> <p>For OCP NIC 3.0 cards, the required PER[0:15] signals shall be connected to the endpoint silicon. For silicon that uses less than a x16 connection, the appropriate PER[0:15] signals shall be connected per the endpoint datasheet.</p> <p>Refer to Section 6.1 in the PCIe CEM Specification, Rev 4.0 for details.</p> |
| PERp0  | A18 |        |   |
| PERn1  | A20 | Input  |   |
| PERp1  | A21 |        |   |
| PERn2  | A23 | Input  |   |
| PERp2  | A24 |        |   |
| PERn3  | A26 | Input  |   |
| PERp3  | A27 |        |   |
| PERn4  | A30 | Input  |   |
| PERp4  | A31 |        |   |
| PERn5  | A33 | Input  |   |
| PERp5  | A34 |        |   |
| PERn6  | A36 | Input  |   |
| PERp6  | A37 |        |   |
| PERn7  | A39 | Input  |   |
| PERp7  | A40 |        |   |
| PERn8  | A44 | Input  |   |
| PERp8  | A45 |        |   |
| PERn9  | A47 | Input  |   |
| PERp9  | A48 |        |   |
| PERn10 | A50 | Input  |   |
| PERp10 | A51 |        |   |
| PERn11 | A53 | Input  |   |
| PERp11 | A54 |        |   |

|  |                                |        |   |
|--|--------------------------------|--------|---|
| PERn12<br>PERp12                         | A56<br>A57                     | Input  |   |
| PERn13<br>PERp13                         | A59<br>A60                     | Input  |   |
| PERn14<br>PERp14                         | A62<br>A63                     | Input  |   |
| PERn15<br>PERp15                         | A65<br>A66                     | Input  |   |
| PERST0#<br>PERST1#<br>PERST2#<br>PERST3# | B10<br>A11<br>OCP_A1<br>OCP_A2 | Output | <p>PCIe Reset #0, #1, #2, and #3. Active low.</p> <p>When PERSTn# is deasserted, the signal shall indicate the power state is already in Main Power Mode and is within tolerance and stable for the OCP NIC 3.0 card.</p> <p>PERST# shall be deasserted at least 1s after the NIC_PWR_GOOD assertion to Main Power Mode. This ensures the card power rails are within the operating limits. This value is longer than the minimum value specified in the PCIe CEM Specification. The PCIe REFCLKs shall also become stable within this period of time.</p> <p>PERST# shall be asserted low on the baseboard until the platform is ready to deassert reset.</p> <p>For baseboards that support bifurcation, the PERST[0:1]# signals are required at the Primary and Secondary connectors, PERST[2:3]# are only supported for the Primary Connector.</p> <p>For OCP NIC 3.0 cards, the required PERST[0:3]# signals shall be connected to the endpoint silicon. Unused PERST[0:3]# signals shall be left as a no connect.</p> <p><b>Note:</b> For cards that only support 1 x16, PERST0# is used. For cards that support 2 x8, PERST0# is used for the first eight PCIe lanes, and PERST1# is used for the second eight PCIe lanes. PERST2# and PERST3# are only used for cards that support a four link PCIe bifurcation mode.</p> <p>PERST0# is always available to all OCP NIC 3.0 cards. The card should not assume PERST1#, PERST2# or PERST3# is available until the bifurcation negotiation process is complete.</p> |

|         |        |            |   |
|---------|--------|------------|---|
|         |        |            | Refer to Section 2.2 in the PCIe CEM Specification, Rev 4.0 for details.  |
| WAKE#   | OCP_A3 | Input, OD  | <p>WAKE#. Open drain. Active low.</p> <p>This signal shall be driven by the OCP NIC 3.0 card to notify the baseboard to restore PCIe link. For OCP NIC 3.0 cards that support multiple WAKE# signals, their respective WAKE# pins may be tied together as the signal is open-drain to form a wired-OR. For multi-homed host configurations, the WAKE# signal assertion shall wake all nodes.</p> <p>For baseboards, this signal shall be pulled up to +3.3V_EDGE on the baseboard with a 10kOhm resistor. This signals shall be connected to the system WAKE# signal.</p> <p>For OCP NIC 3.0 cards, this signal shall be connected between the endpoint silicon WAKE# pin(s) and the card edge through an isolation buffer. The WAKE# signal shall not assert until the PCIe card is in the D3 state according to the PCIe CEM specification to prevent false WAKE# events. For OCP NIC 3.0, the WAKE# pin shall be buffered or otherwise isolated from the host until the aux voltage source is present. Examples of this are shown in Section 3.5.5 by gating via an on-board “AUX_PWR_GOOD” signal to indicate all the NIC AUX power rails are stable. The PCIe CEM specification also shows an example in the WAKE# signal section.</p> <p>This pin shall be left as a no connect if WAKE# is not supported by the silicon.</p> <p>Refer to Section 2.3 in the PCIe CEM Specification, Rev 4.0 for details.</p> |
| PWRBRK# | A70    | Output, OD | <p>Power break. Active low, open drain.</p> <p>This signal shall be pulled up to +3.3V_EDGE on the OCP NIC 3.0 card with a minimum of 95kOhm. The pull up on the baseboard shall be a stiffer resistance in-order to meet the timing specs as shown in the PCIe CEM Specification.</p> <p>When this signal is driven low by the baseboard, the Emergency Power Reduction State is requested. The OCP NIC 3.0 card shall move to a lower power consumption state.</p>  |

|  |  |  |   |
|--|--|--|---|
|  |  |  | <p>For baseboards, the PWRBRK# pin shall be implemented and available on the Primary Connector.</p> <p>For OCP NIC 3.0 cards, the PWRBRK# pin usage is optional. If used, the PWRBRK# should be connected to the network silicon to enable reduced power state. If not used, the PWRBRK# signal shall be left as a no connect.</p> <p>Note: The PWRBRK# pin is only available for OCP NIC 3.0 cards that implement a 4C+ edge connector. For cards that implement at 2C+ edge connection, the PWRBRK# functionality is not available.</p> |
|--|--|--|---|

### 3.4.2 PCIe Present and Bifurcation Control Pins

This section provides the pin assignments for the PCIe present and bifurcation control signals. The AC/DC specifications are defined in Section 3.12. Example connection diagrams are shown in Figure 74 and Figure 75.

The PRSNTA#/PRSNTB[0:3]# state shall be used to determine if a card has been physically plugged in. The BIF[0:2]# pins shall be latched before PWR\_EN assertion to ensure the correct values are detected by the system. Changing the pin states after this timing window is not allowed. Refer to the AC timing diagram in Section 3.12 for details.

Table 21: Pin Descriptions – PCIe Present and Bifurcation Control Pins

| Signal Name                                  | Pin #                    | Baseboard Direction | Signal Description  |
|--|--------------------------|---------------------|---|
| PRSNTA#                                      | A10                      | Output              | <p>Present A is used for OCP NIC 3.0 card presence and PCIe capabilities detection.</p> <p>For baseboards, this pin shall be directly connected to GND.</p> <p>For OCP NIC 3.0 cards, this pin shall be directly connected to the PRSNTB[3:0]# pins.</p>  |
| PRSNTB0#<br>PRSNTB1#<br>PRSNTB2#<br>PRSNTB3# | B42<br>A42<br>A12<br>B70 | Input               | <p>Present B [0:3]# are used for OCP NIC 3.0 card presence and PCIe capabilities detection.</p> <p>For baseboards, these pins shall be connected to the I/O hub and pulled up to +3.3V_EDGE using 1kOhm resistors.</p> <p>For OCP NIC 3.0 cards, these pins shall be strapped to PRSNTA# per the encoding definitions described in Section 3.5.</p> |

|                                  |                         |               |   |
|----------------------------------|-------------------------|---------------|---|
|                                  |                         |               | <p>Note: PRSNTB3# is located at the bottom of the 4C connector and is only applicable for OCP NIC 3.0 cards with a PCIe width of x16 (or greater). OCP NIC 3.0 cards that implement a 2C card edge do not use the PRSNTB3# pin for capabilities or present detection.</p>   |
| <p>BIF0#<br/>BIF1#<br/>BIF2#</p> | <p>B7<br/>B8<br/>B9</p> | <p>Output</p> | <p>Bifurcation [0:2]# pins allow the baseboard to force configure the OCP NIC 3.0 card bifurcation.</p> <p>For baseboards, these pins shall be outputs driven from the baseboard I/O hub and allow the system to force configure the OCP NIC 3.0 card bifurcation. The baseboard may optionally pull the BIF[0:2]# signals to AUX_PWR_EN or to ground per the definitions are described in Section 3.5 if no dynamic bifurcation configuration is required.</p> <p>The BIF[0:2]# pins shall be low until AUX_PWR_EN is asserted to prevent leakage paths into an unpowered card.</p> <p>For baseboards that allow dynamic bifurcation, the BIF[0:2] pins are driven low prior to AUX_PWR_EN. Refer to Figure 74 for an example configuration.</p> <p>For baseboards with static bifurcation, the BIF pins that are intended to be a logical '1' shall be connected to a pull up to AUX_PWR_EN. BIF pins that are a logical '0' may be directly tied to ground. Refer to Figure 75 for an example configuration.</p> <p>For OCP NIC 3.0 cards, these signals shall connect to the endpoint bifurcation pins if it is supported. The BIF[0:2]# signals shall be left as no connects if end point bifurcation is not supported.</p> <p>Note: the required combinatorial logic output for endpoint bifurcation is dependent on the specific silicon and is not defined in this specification.</p> |

Figure 74: PCIe Present and Bifurcation Control Pins (Baseboard Controlled BIF[0:2]#)


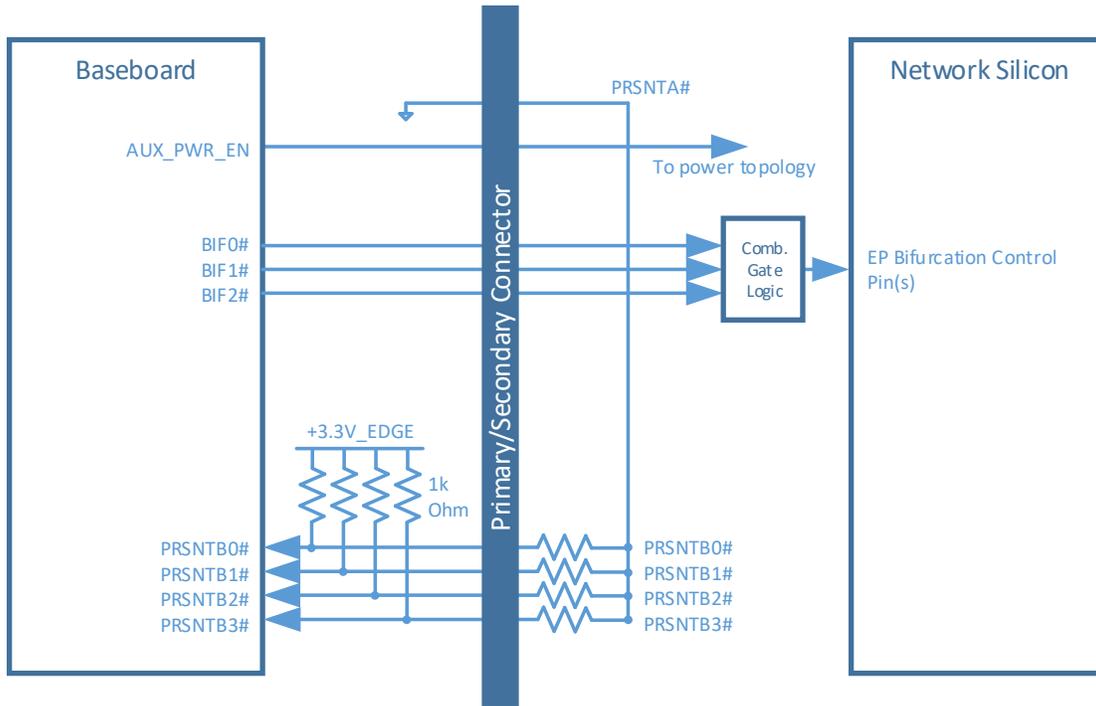


Figure 75: PCIe Present and Bifurcation Control Pins (Static BIF[0:2]#)

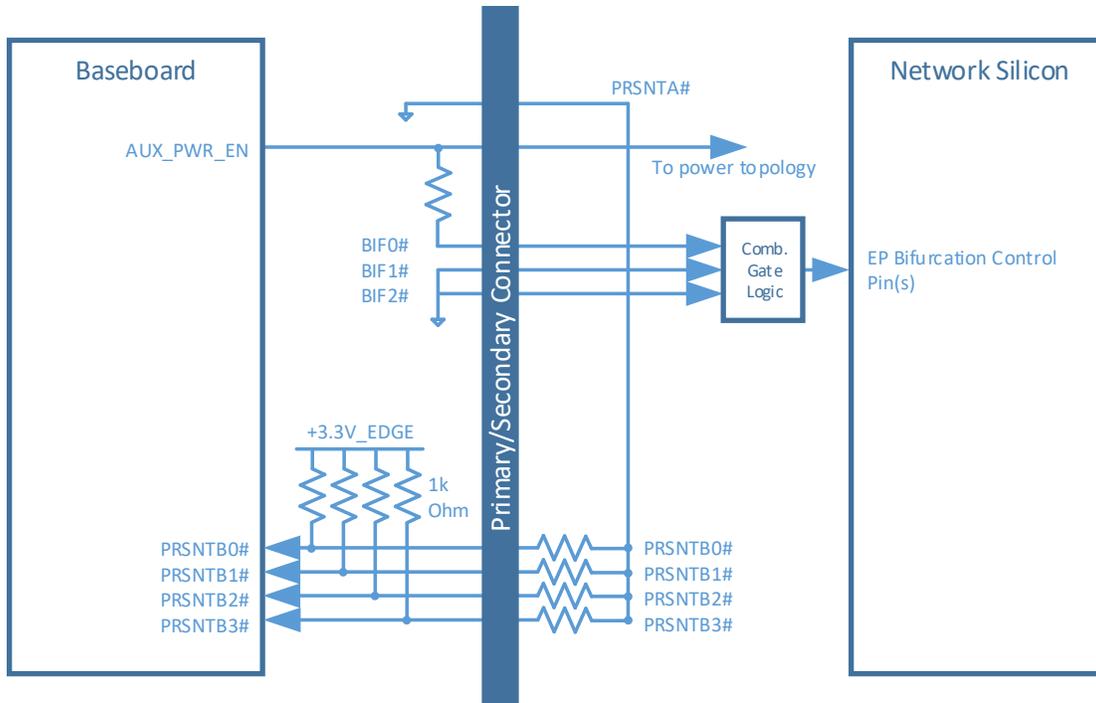


### 3.4.3 SMBus Interface Pins

This section provides the pin assignments for the SMBus interface signals. The AC/DC specifications are defined in the SMBus 2.0 and I<sup>2</sup>C bus specifications. An example connection diagram is shown in Figure 76.

Table 22: Pin Descriptions – SMBus

| Signal Name | Pin # | Baseboard Direction | Signal Description   |
|-------------|-------|---------------------|--|
| SMCLK       | A7    | Output, OD          | <p>SMBus clock. Open drain, pulled up to +3.3V_EDGE on the baseboard.</p> <p>For baseboards, the SMCLK from the platform SMBus master shall be connected to the connector.</p> <p>For OCP NIC 3.0 cards, the SMCLK from the endpoint silicon shall be connected to the card edge gold fingers.</p>   |
| SMDAT       | A8    | Input / Output, OD  | <p>SMBus Data. Open drain, pulled up to +3.3V_EDGE on the baseboard.</p> <p>For baseboards, the SMDAT from the platform SMBus master shall be connected to the connector.</p> <p>For OCP NIC 3.0 cards, the SMDAT from the endpoint silicon shall be connected to the card edge gold fingers.</p>  |
| SMRST#      | A9    | Output, OD          | <p>SMBus reset. Open drain.</p> <p>For baseboards, this pin shall be pulled up to +3.3V_EDGE. The SMRST pin may be used to reset optional downstream SMBus devices (such as temperature sensors). The SMRST# implementation shall be mandatory for baseboard implementations.</p> <p>For OCP NIC 3.0 cards, SMRST# is optional and is dependent on the OCP NIC 3.0 card implementation. If used, the SMRST# is on the +3.3V_EDGE power domain. Isolation logic may be required if the target device(s) exist on a different power domain to prevent a leakage path. The SMRST# signal shall be left as a no connect if it is not used on the OCP NIC 3.0 card.</p> |

Figure 76: Example SMBus Connections

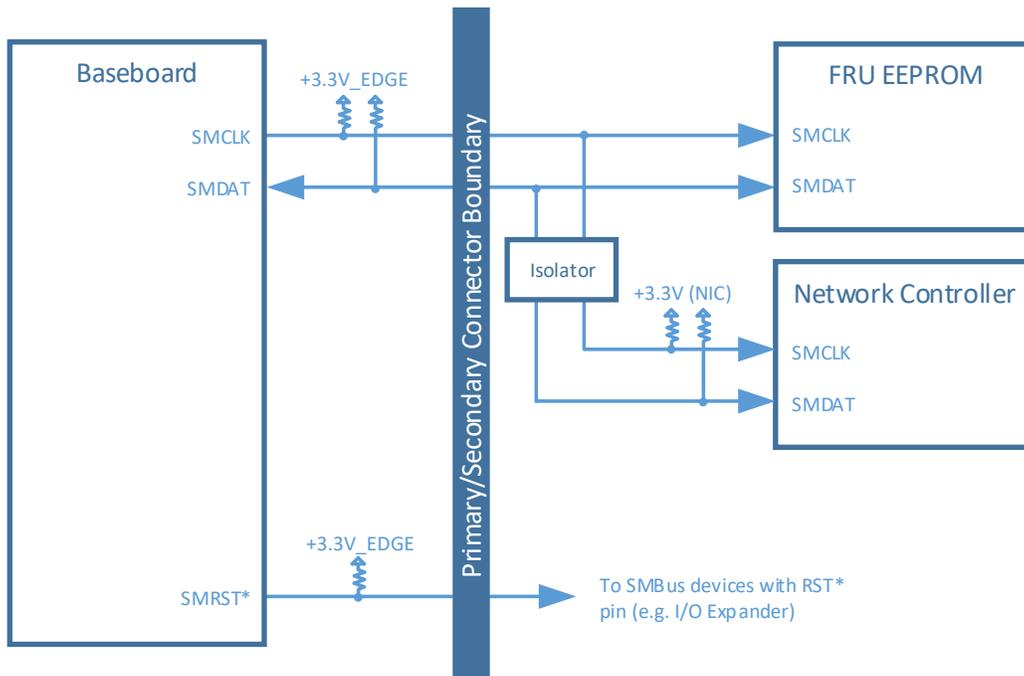

### 3.4.4 NC-SI Over RBT Interface Pins

This section provides the pin assignments for the NC-SI over RBT interface signals on the Primary Connector OCP bay. The AC/DC specifications for NC-SI over RBT are defined in the DMTF DSP0222 NC-SI specification. An example connection diagram is shown in Figure 77 and Figure 78.

Note: The RBT pins must provide the ability to be isolated on the baseboard side when AUX\_PWR\_EN=0 or when (AUX\_PWR\_EN=1 and NIC\_PWR\_GOOD=0). The RBT pins shall not be isolated when the power state machine has transitioned to AUX power mode or the transition to Main Power Mode. This prevents a leakage path through unpowered silicon. The RBT REF\_CLK must also be disabled until AUX\_PWR\_EN=1. Example buffering implementations are shown in Figure 77 and Figure 78. The isolator shall be controlled on the baseboard with a signal called RBT\_ISOLATE#.

Table 23: Pin Descriptions – NC-SI Over RBT

| Signal Name | Pin #   | Baseboard Direction | Signal Description   |
|-------------|---------|---------------------|--|
| RBT_REF_CLK | OCP_A14 | Output              | Reference clock input. Synchronous clock reference for receive, transmit and control interface. The clock shall have a typical frequency of 50MHz.<br><br>For baseboards, this pin shall be connected between the baseboard NC-SI over RBT PHY and the Primary Connector OCP bay. This signal requires a 100kOhm pull down resistor on the baseboard. If the baseboard does not support NC-SI over RBT, then |

|                      |                  |        |   |
|----------------------|------------------|--------|---|
|                      |                  |        | <p>this signal shall be terminated to ground through a 100kOhm pull down resistor. The RBT_REF_CLK shall not be driven until the card has transitioned into AUX Power Mode.</p> <p>For OCP NIC 3.0 cards, this pin shall be connected between the gold finger to the endpoint silicon. This pin shall be left as a no connect if NC-SI over RBT is not supported.</p>   |
| RBT_CRSDV            | OCP_B14          | Input  | <p>Carrier sense/receive data valid. This signal is used to indicate to the baseboard that the carrier sense/receive data is valid.</p> <p>For baseboards, this pin shall be connected between the baseboard NC-SI over RBT PHY and the connector. This signal requires a 100kOhm pull down resistor on the baseboard. If the baseboard does not support NC-SI over RBT, then this signal shall be terminated to ground through a 100kOhm pull down resistor.</p> <p>For OCP NIC 3.0 cards, this pin shall be connected between the gold finger to the endpoint silicon. This pin shall be left as a no connect if NC-SI over RBT is not supported.</p> |
| RBT_RXD0<br>RBT_RXD1 | OCP_B9<br>OCP_B8 | Input  | <p>Receive data. Data signals from the network controller to the BMC.</p> <p>For baseboards, this pin shall be connected between the baseboard NC-SI over RBT PHY and the connector. This signal requires a 100kOhm pull down resistor to GND on the baseboard. If the baseboard does not support NC-SI over RBT, then this signal shall be terminated to GND through a 100kOhm pull down.</p> <p>For OCP NIC 3.0 cards, this pin shall be connected between the gold finger and the RBT_RXD[0:1] pins on endpoint silicon. This pin shall be left as a no connect if NC-SI over RBT is not supported.</p>  |
| RBT_TX_EN            | OCP_A7           | Output | <p>Transmit enable.</p> <p>For baseboards, this pin shall be connected between the baseboard NC-SI over RBT PHY and the connector. This signal requires a 100kOhm pull down resistor to ground on the baseboard. If the baseboard does not support NC-SI over RBT, then</p>   |

|                      |                  |        |   |
|----------------------|------------------|--------|---|
|                      |                  |        | <p>this signal shall be terminated to ground through a 100kOhm pull down.</p> <p>For OCP NIC 3.0 cards, this pin shall be connected between the gold finger to the endpoint silicon. This pin shall be left as a no connect if NC-SI over RBT is not supported.</p>   |
| RBT_TXD0<br>RBT_TXD1 | OCP_A9<br>OCP_A8 | Output | <p>Transmit data. Data signals from the BMC to the network controller.</p> <p>For baseboards, this pin shall be connected between the baseboard NC-SI over RBT PHY and the connector. This signal requires a 100kOhm pull down resistor to GND on the baseboard. If the baseboard does not support NC-SI over RBT, then this signal shall be terminated to GND through a 100kOhm pull down.</p> <p>For OCP NIC 3.0 cards, this pin shall be connected between the gold finger to the RBT_TXD[0:1] pins on the endpoint silicon. This pin shall be left as a no connect if NC-SI over RBT is not supported.</p>  |
| RBT_ARB_OUT          | OCP_A5           | Output | <p>NC-SI hardware arbitration output.</p> <p>If the baseboard does not support NC-SI over RBT or implements only one OCP NIC 3.0 interface, this signal shall be directly connected to the RBT_ARB_IN pin to complete the hardware arbitration ring on the OCP NIC 3.0 card. If the baseboard supports multiple OCP NIC 3.0 cards connected to the same RBT interface, it shall implement logic that connects the RBT_ARB_OUT pin of the first populated OCP NIC 3.0 card to its RBT_ARB_IN pin if it is the only card present or to the RBT_ARB_IN pin of the next populated card and so on sequentially for all cards on the specified RBT bus to ensure the arbitration ring is complete. A two OCP NIC 3.0 card example using an analog mux is shown in Figure 78.</p> <p>For OCP NIC 3.0 cards that support hardware arbitration, this pin shall be connected between the gold finger to the RBT_ARB_IN pin on the endpoint silicon. If the card implements two controllers, both must be connected internally to complete the ring, see Figure 78. If hardware arbitration is not supported, then this pin shall be directly connected to the card edge RBT_ARB_IN pin. This allows the</p> |

|                         |                  |                 | hardware arbitration signals to pass through in a multi-Primary Connector baseboard.  |                         |                 |                 |   |   |   |   |   |   |   |   |   |   |   |   |
|-------------------------|------------------|-----------------|---|-------------------------|-----------------|-----------------|---|---|---|---|---|---|---|---|---|---|---|---|
| RBT_ARB_IN              | OCP_A4           | Input           | <p>NC-SI hardware arbitration input.</p> <p>If the baseboard does not support NC-SI over RBT or implements only one OCP NIC 3.0 interface, this signal shall be directly connected to the RBT_ARB_OUT pin to complete the hardware arbitration ring on the OCP NIC 3.0 card. If the baseboard supports multiple OCP NIC 3.0 cards connected to the same RBT interface, it shall implement logic that connects the RBT_ARB_IN pin of the first populated OCP NIC 3.0 card to its RBT_ARB_OUT pin if it is the only card present or to the RBT_ARB_OUT pin of the next populated card and so on sequentially for all cards on the specified RBT bus to ensure the arbitration ring is complete. A two OCP NIC 3.0 card example using an analog mux is shown in Figure 78.</p> <p>For OCP NIC 3.0 cards that support hardware arbitration, this pin shall be connected between the gold finger to the RBT_ARB_OUT pin on the endpoint silicon. If the card implements two controllers, both must be connected internally to complete the ring, see Figure 78. If hardware arbitration is not supported, then this pin shall be directly connected to the card edge RBT_ARB_OUT pin. This allows the hardware arbitration signals to pass through in a multi-Primary Connector baseboard.</p> |                         |                 |                 |   |   |   |   |   |   |   |   |   |   |   |   |
| SLOT_ID0<br>SLOT_ID1    | OCP_B7<br>OCP_A6 | Output          | <p>NC-SI / FRU EEPROM Address 0/1.</p> <p>The SLOT_ID[1:0] pins shall be used to set the RBT Package ID. This pin is also used in setting the FRU EEPROM address.</p> <p>For baseboards, the SLOT_ID[1:0] pins shall be physically tied to GND or to +3.3V_EDGE. The SLOT[1:0] values are based on the following mapping:</p> <table border="1" data-bbox="781 1654 1419 1873"> <thead> <tr> <th>Physical Slot (Decimal)</th> <th>SLOT_ID1 OCP_A6</th> <th>SLOT_ID0 OCP_B7</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>1</td> <td>0</td> <td>1</td> </tr> <tr> <td>2</td> <td>1</td> <td>0</td> </tr> <tr> <td>3</td> <td>1</td> <td>1</td> </tr> </tbody> </table>  | Physical Slot (Decimal) | SLOT_ID1 OCP_A6 | SLOT_ID0 OCP_B7 | 0 | 0 | 0 | 1 | 0 | 1 | 2 | 1 | 0 | 3 | 1 | 1 |
| Physical Slot (Decimal) | SLOT_ID1 OCP_A6  | SLOT_ID0 OCP_B7 |   |                         |                 |                 |   |   |   |   |   |   |   |   |   |   |   |   |
| 0                       | 0                | 0               |   |                         |                 |                 |   |   |   |   |   |   |   |   |   |   |   |   |
| 1                       | 0                | 1               |   |                         |                 |                 |   |   |   |   |   |   |   |   |   |   |   |   |
| 2                       | 1                | 0               |   |                         |                 |                 |   |   |   |   |   |   |   |   |   |   |   |   |
| 3                       | 1                | 1               |   |                         |                 |                 |   |   |   |   |   |   |   |   |   |   |   |   |

|  |  |  |  |
|--|--|--|--|
|  |  |  | <p>For OCP NIC 3.0 cards, SLOT_ID0 shall be connected to the endpoint device GPIO associated with Package ID[0]. SLOT_ID1 shall be associated with Package ID[1]. Refer to Section 4.8.1 and the device datasheet for details.</p> <p>For OCP NIC 3.0 cards with multiple endpoint devices, Package ID[2] shall be used to identify a second physical RBT capable controller on the same physical card.</p> <p>For Package ID addressing, the SLOT_ID[1:0] pins shall be buffered on NIC side with a FET switch (or a similar implementation) to prevent a leakage path when the OCP NIC 3.0 card is in ID mode. The SLOT_ID[1:0] buffers shall isolate the signals to the network silicon until an “Aux Power Good” is generated locally from the NIC. This indication shall be generated from an on-board voltage monitor or similar logic. OCP NIC 3.0 designers may omit isolation logic for the Package ID addressing if the target silicon properly isolates the signals when it is unpowered.</p> <p>For FRU EEPROM addressing, the SLOT_ID0 pin shall be directly connected to the EEPROM A1 address pin; SLOT_ID1 shall be connected to the EEPROM A2 address pin. No isolation shall be used for the FRU EEPROM connections.</p> <p>For endpoint devices without NC-SI over RBT support, these pins shall only be connected to the FRU EEPROM as previously described.</p> |
|--|--|--|--|

Figure 77: NC-SI Over RBT Connection Example – Single Primary Connector


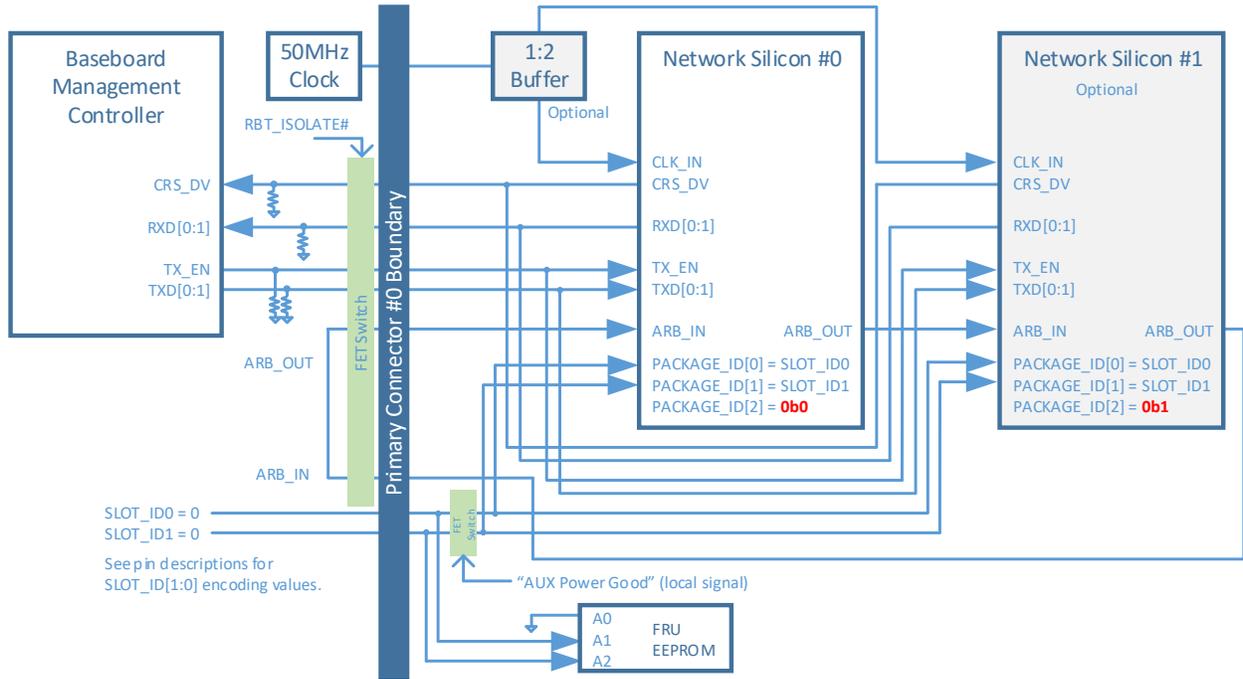


Figure 78: NC-SI Over RBT Connection Example – Dual Primary Connectors

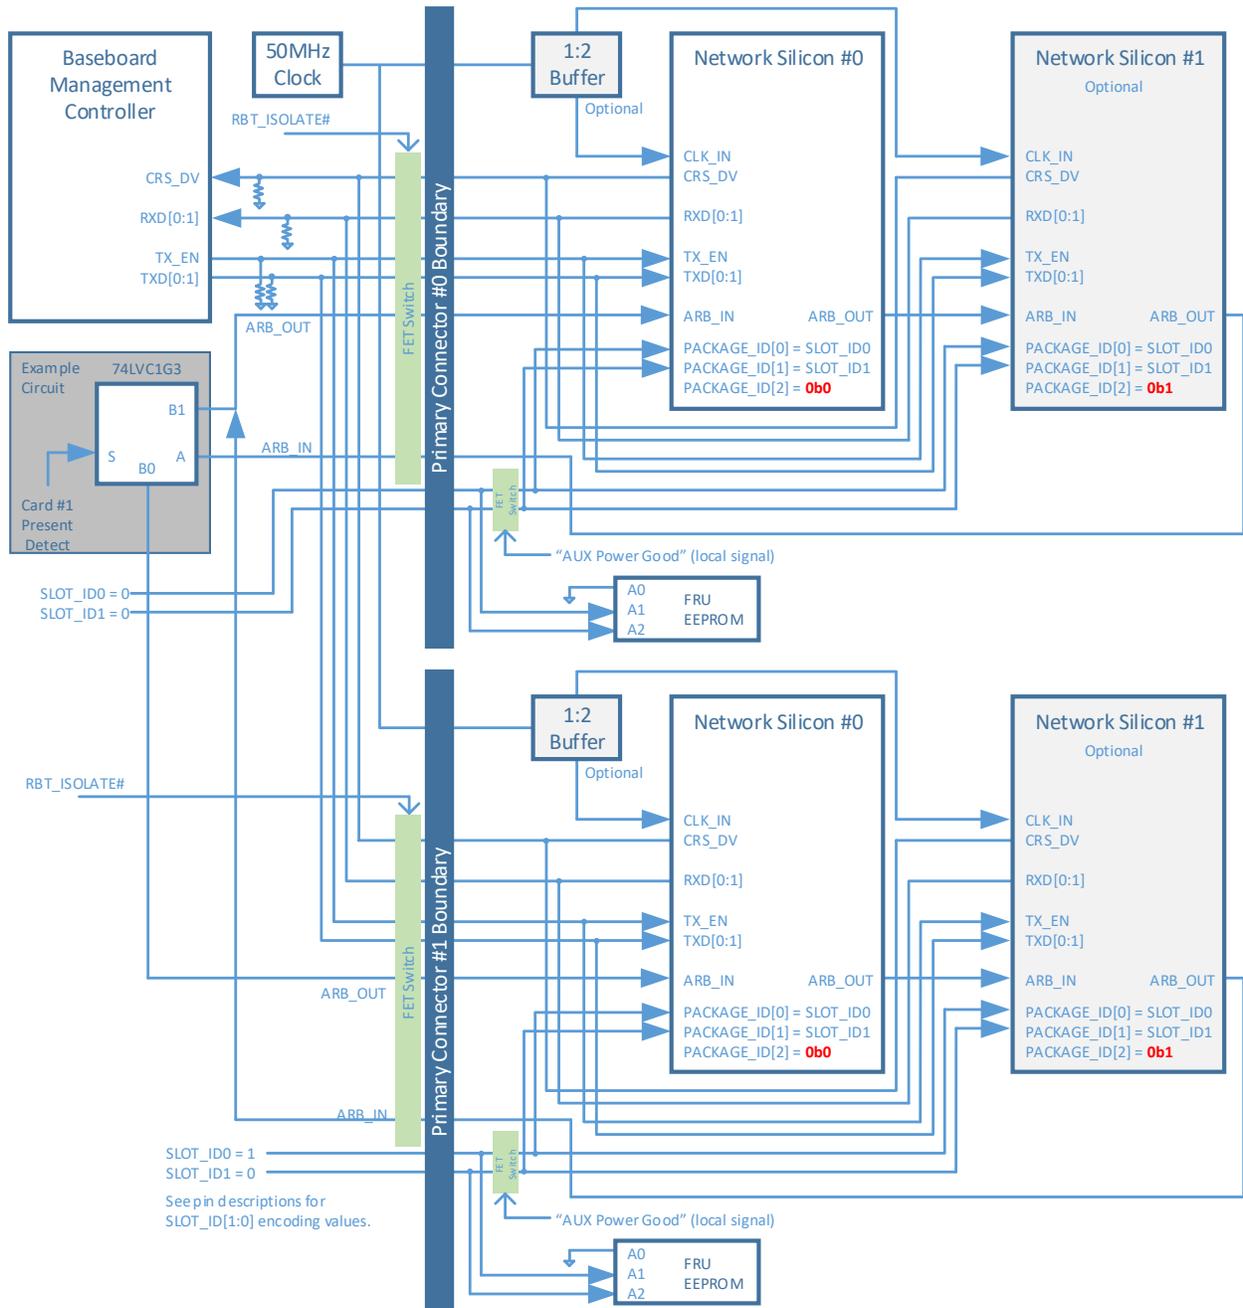

**Note 1:** For baseboard designs with a single Primary Connector, connect ARB\_IN to ARB\_OUT to complete the NC-SI hardware arbitration ring. For designs with multiple Primary Connectors, connect ARB\_IN and ARB\_OUT to an analog mux to complete the NC-SI arbitration ring based on the number of cards installed in the system. An example dual Primary Connector implementation is shown in Figure 78.

**Note 2:** For baseboard implementations having two or more RBT busses, the baseboard hardware arbitration rings shall remain within their respective bus and shall not cross RBT bus domains.

**Note 3:** The logical implementation of the hardware arbitration ring shall maintain the arbitration ring integrity when there exists one or more cards that are plugged in, but are powered off (e.g in ID Mode).

**Note 4:** For OCP NIC 3.0 cards with two discrete endpoint silicon, the Package ID[2] bit shall be statically set based on the silicon instance. For example, the figure above shows Network Silicon #0 and Network Silicon #1. Network Silicon #0 has Package ID[2] = 0b0, Network Silicon #1 has Package ID[2] = 0b1.

**Note 5:** Designs that implement a clock fan out buffer will affect the RBT timing budget. Careful analysis of the timing budget is required. Refer to Section 5.1 for RBT signal integrity and timing budget considerations.

### 3.4.5 Scan Chain Pins

This section provides the pin assignments for the Scan Chain interface signals on the Primary Connector OCP Bay. The scan chain is a point-to-point bus on a per OCP slot basis. The scan chain consists of two unidirectional busses, a common clock and a common load signal. The DATA\_OUT signal serially shifts control signals from the baseboard to the OCP NIC 3.0 card. The DATA\_IN signal serially shifts bits from the OCP NIC 3.0 card to the baseboard. The DATA\_OUT and DATA\_IN chains are independent of each other. The scan chain CLK is driven from the baseboard. The LD pin, when asserted by the baseboard, allows loading of the data on to the shift registers. An example timing diagram is shown in Figure 79. An example connection diagram is shown in Figure 80.


**Note:** The DATA\_OUT chain is provisioned, but is not used on OCP NIC 3.0 cards for this revision of the specification.

Table 24: Pin Descriptions – Scan Chain

| Signal Name | Pin #  | Baseboard Direction | Signal Description   |
|-------------|--------|---------------------|--|
| CLK         | OCP_B6 | Output              | <p>Scan clock. The CLK is an output pin from the baseboard to the OCP NIC 3.0 card. The CLK may run up to 12.5MHz.</p> <p>For baseboard implementations, the CLK pin shall be connected to the Primary Connector. The CLK pin shall be tied directly to GND if the scan chain is not used.</p> <p>For NIC implementations, the CLK pin shall be connected to Shift Registers 0 &amp; 1, and optionally connected to Shift Registers 2 &amp; 3 (if implemented) as defined in the text and Figure 80, below. The CLK pin shall be pulled up to +3.3V_EDGE through a 1kOhm resistor.</p> |
| DATA_OUT    | OCP_B5 | Output              | <p>Scan data output from the baseboard to the OCP NIC 3.0 card. This bit stream is used to shift configuration data out to the NIC.</p>  |

|         |        |        |  |
|---------|--------|--------|--|
|         |        |        | <p>For baseboard implementations, the DATA_OUT pin shall be connected to the Primary Connector. The DATA_OUT pin shall be pulled down to GND through a 1kOhm resistor if the scan chain is not used.</p> <p>For NIC implementations, the DATA_OUT pin shall be pulled down to GND on the OCP NIC 3.0 card through a 10kOhm resistor.</p>   |
| DATA_IN | OCP_B4 | Input  | <p>Scan data input to the baseboard. This bit stream is used to shift out NIC status bits to the baseboard.</p> <p>For baseboard implementations, the DATA_IN pin shall be pulled up to +3.3V_EDGE through a 10kOhm resistor to prevent the input signal from floating if a card is not installed. This pin may be left as a no connect if the scan chain is not used.</p> <p>For NIC implementations, the DATA_IN scan chain is required. The DATA_IN pin shall be connected to Shift Register 0, as defined in the text and Figure 80.</p>   |
| LD#     | OCP_B3 | Output | <p>Scan shift register load. Used to latch configuration data on the OCP NIC 3.0 card.</p> <p>For baseboard implementations, the LD# pin shall be pulled up to +3.3V_EDGE through a 1kOhm resistor if the scan chain is not used to prevent the OCP NIC 3.0 card from erroneous data latching.</p> <p>For NIC implementations, the LD# pin implementation is required. The LD# pin shall be connected to Shift Registers 0 &amp; 1, and optionally connected to Shift Registers 2 &amp; 3 (if implemented) as defined in the text and Figure 80. The LD# pin shall be pulled up to +3.3V_EDGE through a 10kOhm resistor.</p> |

Figure 79: Example Scan Chain Timing Diagram

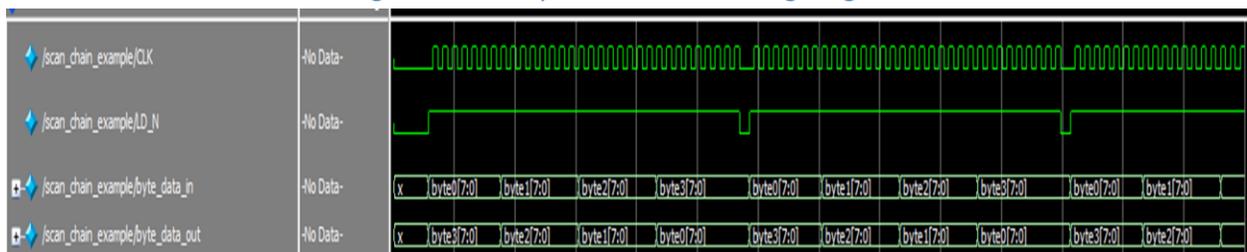

The scan chain provides sideband status indication between the OCP NIC 3.0 card and the baseboard. The scan chain bit definition is defined in the two tables below. The scan chain data stream is 32-bits in length for both the DATA\_OUT and the DATA\_IN streams. The scan chain implementation is optional on

the host, but its implementation is mandatory per Table 25 and Table 26 on all OCP NIC 3.0 cards. The scan chain components operates on the +3.3V\_EDGE power domain.

The DATA\_OUT bus is an output from the host. The DATA\_OUT bus provides initial configuration options to the OCP NIC 3.0 card. At the time of this writing, the DATA\_OUT bus is not used. All baseboard systems that implement the Scan Chain shall connect DATA\_OUT between the platform and the Primary Connector for subsequent revisions of this specification. The DATA\_OUT data stream shall shift out all 0's prior to AUX\_PWR\_EN assertion to prevent leakage paths into unpowered silicon.

Table 25: Pin Descriptions – Scan Chain DATA\_OUT Bit Definition

| Byte.bit | DATA_OUT Field Name | Default Value | Description                     |
|----------|---------------------|---------------|---------------------------------|
| 0.[0..7] | RSVD                | 0h00          | Reserved. Byte 0 value is 0h00. |
| 1.[0..7] | RSVD                | 0h00          | Reserved. Byte 1 value is 0h00. |
| 2.[0..7] | RSVD                | 0h00          | Reserved. Byte 2 value is 0h00. |
| 3.[0..7] | RSVD                | 0h00          | Reserved. Byte 3 value is 0h00. |

The DATA\_IN bus is an input to the host and provides NIC status indication. The default implementation is completed with two 8-bit 74LV165 parallel in to serial out shift registers in a cascaded implementation. Up to four shift registers may be implemented to provide additional NIC status indication to the host platform.

DATA\_IN shift register 0 shall be mandatory for scan chain implementations for the card present, WAKE\_N and thermal threshold features. DATA\_IN shift registers 1, 2 & 3 are optional depending on the line side I/O and LED fields being reported to the host. Dual port LED applications require shift register 1. Quad port LED applications require shift registers 1 & 2. Octal port applications require shift registers 1, 2 & 3.

The host should read the DATA\_IN bus multiple times to qualify the incoming data stream. The number of data qualification reads is dependent on the baseboard implementation.

On the OCP NIC 3.0 card, a 1kOhm pull up resistor shall be connected to the SER input of the last DATA\_IN shift register. Doing so ensures the default bit value of 0b1 for implementations using less than four shift registers.


Table 26: Pin Descriptions – Scan Chain DATA\_IN Bit Definition

| Byte.bit | DATA_IN Field Name | Default Value | Description   |
|----------|--------------------|---------------|---|
| 0.0      | PRSNTB[0]#         | 0bX           | PRSNTB[3:0]# bits shall reflect the same state as the signals on the Primary Connector. Connect these scan chain signals directly to the OCP NIC 3.0 card edge PRSNTB[3:0]# pins. The OCP NIC 3.0 implementer may alternatively choose to locally populate pull up and pull down resistors to these scan chain inputs as long as the PRSNTB[3:0]# |
| 0.1      | PRSNTB[1]#         | 0bX           |   |
| 0.2      | PRSNTB[2]#         | 0bX           |   |
| 0.3      | PRSNTB[3]#         | 0bX           |   |

|     |               |     |  |
|-----|---------------|-----|--|
|     |               |     | values are the same on the scan chain and card edge.   |
| 0.4 | WAKE_N        | 0bX | PCIe WAKE_N signal shall reflect the same state as the signal on the Primary Connector.  |
| 0.5 | TEMP_WARN_N   | 0b1 | Temperature monitoring pin from the on-card thermal solution. This pin shall be asserted low when temperature sensor exceeds the temperature warning threshold.  |
| 0.6 | TEMP_CRIT_N   | 0b1 | Temperature monitoring pin from the on-card thermal solution. This pin shall be asserted low when temperature sensor exceeds the temperature critical threshold.   |
| 0.7 | FAN_ON_AUX    | 0b0 | When high, FAN_ON_AUX shall request the system fan to be enabled for extra cooling in the S5 state.<br><br>0b0 – The system fan is not requested/off in S5.<br>0b1 – The system fan is requested/on in S5.   |
| 1.0 | LINK_SPDA_P0# | 0b1 | Port 0 link and speed A indication (max speed). Active low.<br><br>0b0 – Link LED is illuminated on the host platform.<br>0b1 – Link LED is not illuminated on the host platform.<br><br><b>Steady</b> = link is detected on the port and is at the maximum speed.<br><b>Off</b> = the physical link is down, not at the maximum speed or is disabled.<br><br>Note: The link and speed A LED may also be blinked for use as port identification. |
| 1.1 | LINK_SPDB_P0# | 0b1 | Port 0 link and speed B indication (not max speed). Active low.<br><br>0b0 – Link LED is illuminated on the host platform.<br>0b1 – Link LED is not illuminated on the host platform.<br><br><b>Steady</b> = link is detected on the port and is not at the max speed.<br><b>Off</b> = the physical link is down, or is disabled.<br><br>Note: The link and speed B LED may also be blinked for use as port identification.                      |
| 1.2 | ACT_P0#       | 0b1 | Port 0 activity indication. Active low.  |

|     |               |     |  |
|-----|---------------|-----|--|
|     |               |     | <p>0b0 – ACT LED is illuminated on the host platform.<br/>0b1 – ACT LED is not illuminated on the host platform.</p> <p><b>Steady</b> = no activity is detected on the port.<br/><b>Blinking</b> = activity is detected on the port. The blink rate should blink low for 50-500ms during activity periods.<br/><b>Off</b> = the physical link is down or disabled.</p> |
| 1.3 | LINK_SPDA_P1# | 0b1 | Port 1 link and speed A indication. Active low.  |
| 1.4 | LINK_SPDB_P1# | 0b1 | Port 1 link and speed B indication. Active low.  |
| 1.5 | ACT_P1#       | 0b1 | Port 1 activity indication. Active low.  |
| 1.6 | LINK_SPDA_P2# | 0b1 | Port 2 link and speed A indication. Active low.  |
| 1.7 | LINK_SPDB_P2# | 0b1 | Port 2 link and speed B indication. Active low.  |
| 2.0 | ACT_P2#       | 0b1 | Port 2 activity indication. Active low.  |
| 2.1 | LINK_SPDA_P3# | 0b1 | Port 3 link and speed A indication. Active low.  |
| 2.2 | LINK_SPDB_P3# | 0b1 | Port 3 link and speed B indication. Active low.  |
| 2.3 | ACT_P3#       | 0b1 | Port 3 activity indication. Active low.  |
| 2.4 | LINK_SPDA_P4# | 0b1 | Port 4 link and speed A indication. Active low.  |
| 2.5 | LINK_SPDB_P4# | 0b1 | Port 4 link and speed B indication. Active low.  |
| 2.6 | ACT_P4#       | 0b1 | Port 4 activity indication. Active low.  |
| 2.7 | LINK_SPDA_P5# | 0b1 | Port 5 link and speed A indication. Active low.  |
| 3.0 | LINK_SPDB_P5# | 0b1 | Port 5 link and speed B indication. Active low.  |
| 3.1 | ACT_P5#       | 0b1 | Port 5 activity indication. Active low.  |
| 3.2 | LINK_SPDA_P6# | 0b1 | Port 6 link and speed A indication. Active low.  |
| 3.3 | LINK_SPDB_P6# | 0b1 | Port 6 link and speed B indication. Active low.  |
| 3.4 | ACT_P6#       | 0b1 | Port 6 activity indication. Active low.  |
| 3.5 | LINK_SPDA_P7# | 0b1 | Port 7 link and speed A indication. Active low.  |
| 3.6 | LINK_SPDB_P7# | 0b1 | Port 7 link and speed B indication. Active low.  |
| 3.7 | ACT_P7#       | 0b1 | Port 7 activity indication. Active low.  |

Figure 80: Scan Chain Connection Example

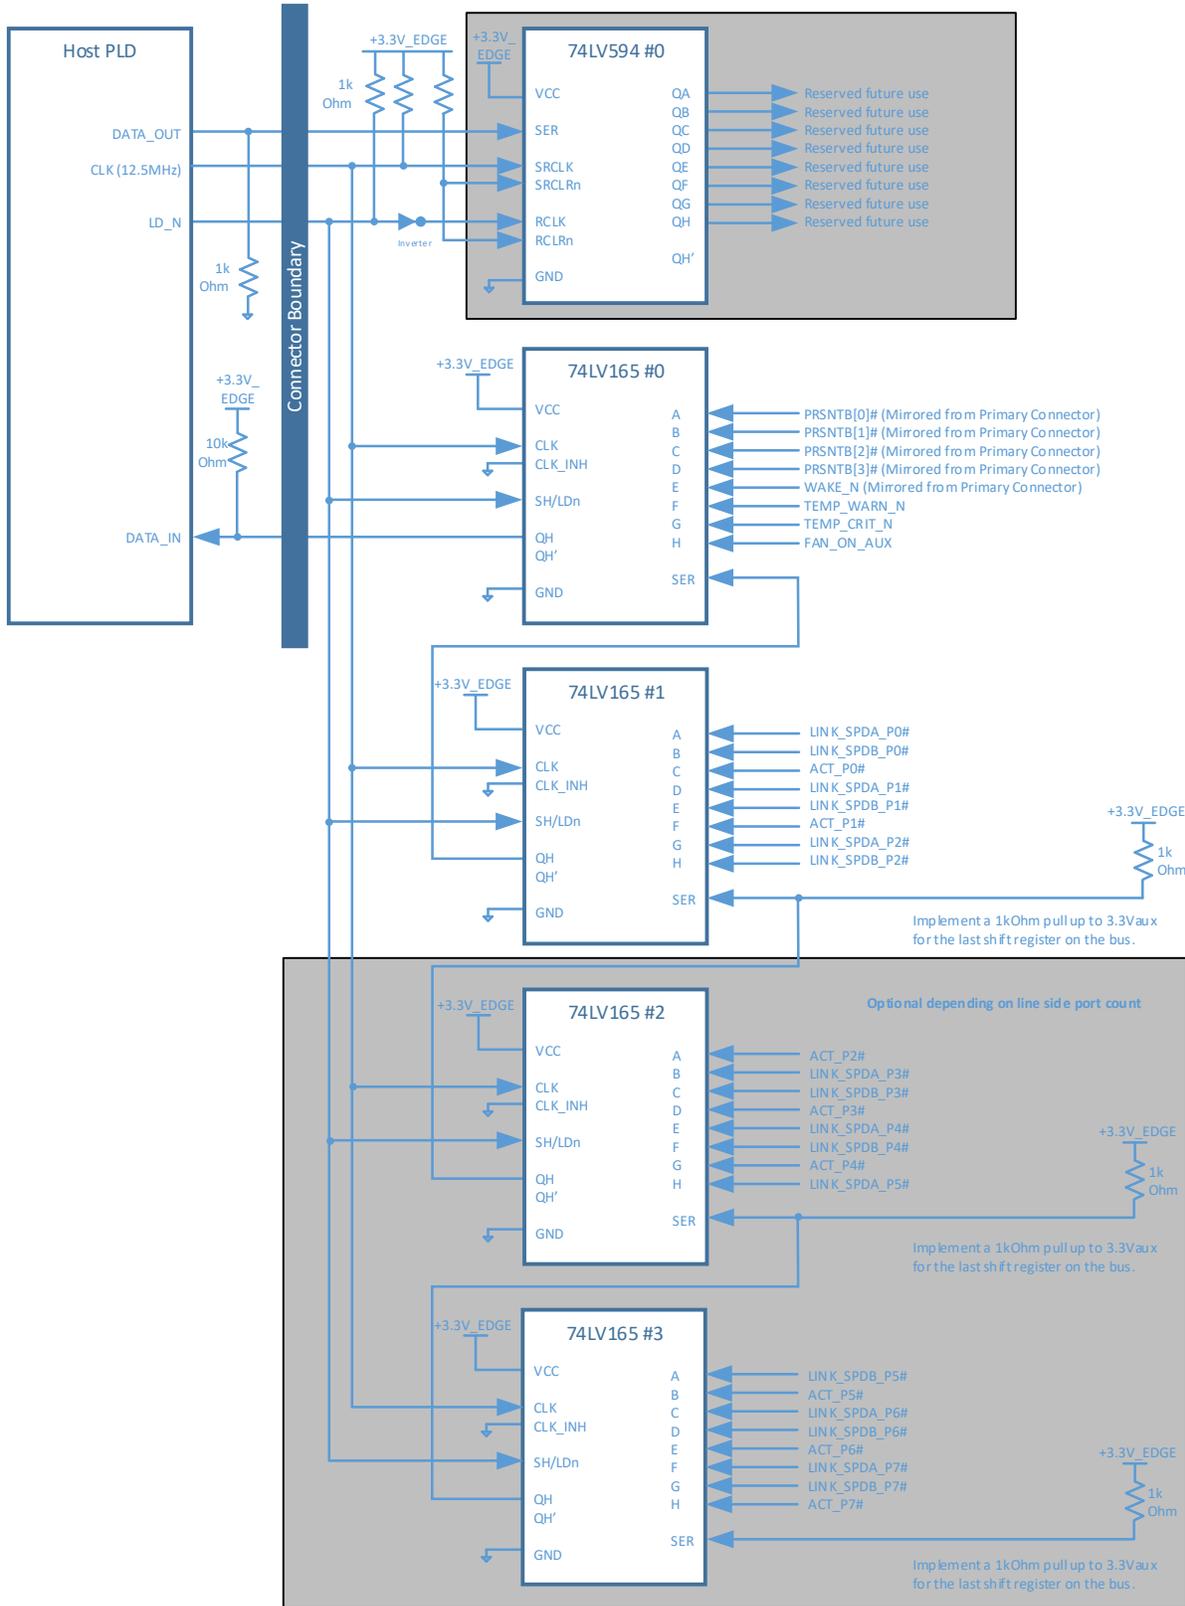

### 3.4.6 Power Supply Pins

This section provides the pin assignments for the power supply interface signals. The AC/DC specifications are defined in the PCIe CEM Specification, Rev 4.0 and amended in Section 3.10. An example connection diagram is shown in Figure 81.


Table 27: Pin Descriptions – Power

| Signal Name | Pin #                  | Baseboard Direction | Signal Description  |
|-------------|------------------------|---------------------|---|
| GND         | Various                | GND                 | Ground return; a total of 46 ground pins are on the main 140-pin connector area. Additionally, a total of 4 ground pins are in the OCP bay area. Refer to Section 3.3 for details.  |
| +12V_EDGE   | B1, B2, B3, B4, B5, B6 | Power               | <p>+12V main or +12V aux power; total of 6 pins per connector. The +12V_EDGE pins shall be rated to 1.1A per pin with a maximum derated power delivery of 80W.</p> <p>The +12V_EDGE power pins shall be within the rail tolerances as defined in Section 3.10 when the PWR_EN pin is driven high by the baseboard.</p> <p>The OCP NIC 3.0 card may optionally implement a fuse on +12V_EDGE to protect against electrical faults.</p> |
| +3.3V_EDGE  | B11                    | Power               | <p>+3.3V main or +3.3V aux power; total of 1 pin per connector. The +3.3V_EDGE pin shall be rated to 1.1A for a maximum derated power delivery of 3.63W.</p> <p>The +3.3V_EDGE power pin shall be within the rail tolerances as defined in Section 3.10 when the PWR_EN pin is driven high by the baseboard.</p> <p>The OCP NIC 3.0 card may optionally implement a fuse on +3.3V_EDGE to protect against electrical faults.</p>      |
| AUX_PWR_EN  | B12                    | Output              | <p>Aux Power enable. Active high.</p> <p>This pin indicates that the +12V_EDGE and +3.3V_EDGE power is from the baseboard aux power rails.</p> <p>This signal shall be pulled down to GND through a 10kOhm resistor on the baseboard. This ensures the OCP NIC 3.0 card power is disabled until instructed to turn on by the baseboard.</p> <p>When low, the OCP NIC 3.0 card supplies running on aux power shall be disabled.</p>    |

|              |        |        |   |
|--------------|--------|--------|---|
|              |        |        | <p>When high, the OCP NIC 3.0 card supplies running on aux power shall be enabled.</p> <p>For OCP NIC 3.0 cards that do not use a separate “main power” domain circuitry (or can operate in a single power domain), the AUX_PWR_EN signal serves as the primary method to enable all the card power supplies.</p> <p>It is expected that a baseboard will not drive signals other than SMBus and the Scan Chain to the OCP NIC 3.0 card when this signal is low.</p>  |
| MAIN_PWR_EN  | OCP_B2 | Output | <p>Main Power Enable. Active high.</p> <p>This pin indicates that the +12_EDGE and +3.3V_EDGE power is from the baseboard main power rails. Additionally, this signal notifies the OCP NIC 3.0 card to enable any power supplies that run only in the Main Power Mode.</p> <p>The MAIN_PWR_EN pin is driven by the baseboard. This pin must be implemented on baseboard systems, but may optionally be used by the OCP NIC 3.0 card depending on the end point silicon implementation. Depending on the silicon vendor, end point devices may be able to operate in a single power domain, or may require separate power domains to function.</p> <p>For baseboard implementations, this signal shall be pulled down to GND through a 10kOhm resistor on the baseboard. This ensures the OCP NIC 3.0 card power is disabled until instructed to turn on by the baseboard.</p> <p>When low, the OCP NIC 3.0 card supplies running on main power shall be disabled.</p> <p>When high, the OCP NIC 3.0 card supplies running on main power shall be enabled.</p> <p>This pin may be left as a no connect for OCP NIC 3.0 cards that do not use a separate “main power” domain SVR circuitry.</p> |
| NIC_PWR_GOOD | OCP_B1 | Input  | <p>NIC Power Good. Active high. This signal is driven by the OCP NIC 3.0 card.</p> <p>The NIC_PWR_GOOD signal is used to indicate when the aux power domain, and main power domain rails are within operational tolerances.</p>   |

|            |             | <p>The truth table shows the expected NIC_PWR_GOOD state for power up sequencing depending on the values of AUX_PWR_EN and MAIN_PWR_EN.</p> <table border="1" data-bbox="760 331 1398 590"> <thead> <tr> <th>AUX_PWR_EN</th> <th>MAIN_PWR_EN</th> <th>NIC_PWR_GOOD Nominal Steady State Value</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>1</td> <td>0</td> <td>1</td> </tr> <tr> <td>0</td> <td>1</td> <td>Invalid</td> </tr> <tr> <td>1</td> <td>1</td> <td>1</td> </tr> </tbody> </table> <p>Refer to the power up and power down sequencing diagrams (Figure 94 and Figure 95) for timing details.</p> <p>Where appropriate, designs that have a separate Main Power domain should also connect to the main power good indication to the NIC_PWR_GOOD signal via a FET to isolate the domains. Refer to Figure 81 for an example implementation.</p> <p>When low, this signal shall indicate that the OCP NIC 3.0 card power supplies are not yet within nominal tolerances or are in a fault condition after the power ramp times (<math>T_{APL}</math> and <math>T_{MPL}</math>) have expired.</p> <p>For baseboards, this pin may be connected to the platform I/O hub as a NIC power health status indication. This signal shall be pulled down to ground with a 100kOhm resistor on the baseboard to prevent a false power good indication if no OCP NIC 3.0 card is present.</p> <p>For OCP NIC 3.0 cards this signal shall indicate the OCP NIC 3.0 card power is “good” for the given power mode. This signal may be implemented by combinatorial logic, a cascaded power good tree or a discrete power good monitor output.</p> <p>When high, this signal should be treated as <math>V_{REF}</math> is available for NC-SI communications. Refer to timing parameter T4 in the DMTF DSP0222 specification for details.</p> | AUX_PWR_EN | MAIN_PWR_EN | NIC_PWR_GOOD Nominal Steady State Value | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | Invalid | 1 | 1 | 1 |
|------------|-------------|--|------------|-------------|---|---|---|---|---|---|---|---|---|---------|---|---|---|
| AUX_PWR_EN | MAIN_PWR_EN | NIC_PWR_GOOD Nominal Steady State Value  |            |             |   |   |   |   |   |   |   |   |   |         |   |   |   |
| 0          | 0           | 0  |            |             |   |   |   |   |   |   |   |   |   |         |   |   |   |
| 1          | 0           | 1  |            |             |   |   |   |   |   |   |   |   |   |         |   |   |   |
| 0          | 1           | Invalid  |            |             |   |   |   |   |   |   |   |   |   |         |   |   |   |
| 1          | 1           | 1  |            |             |   |   |   |   |   |   |   |   |   |         |   |   |   |

Figure 81: Example Power Supply Topology

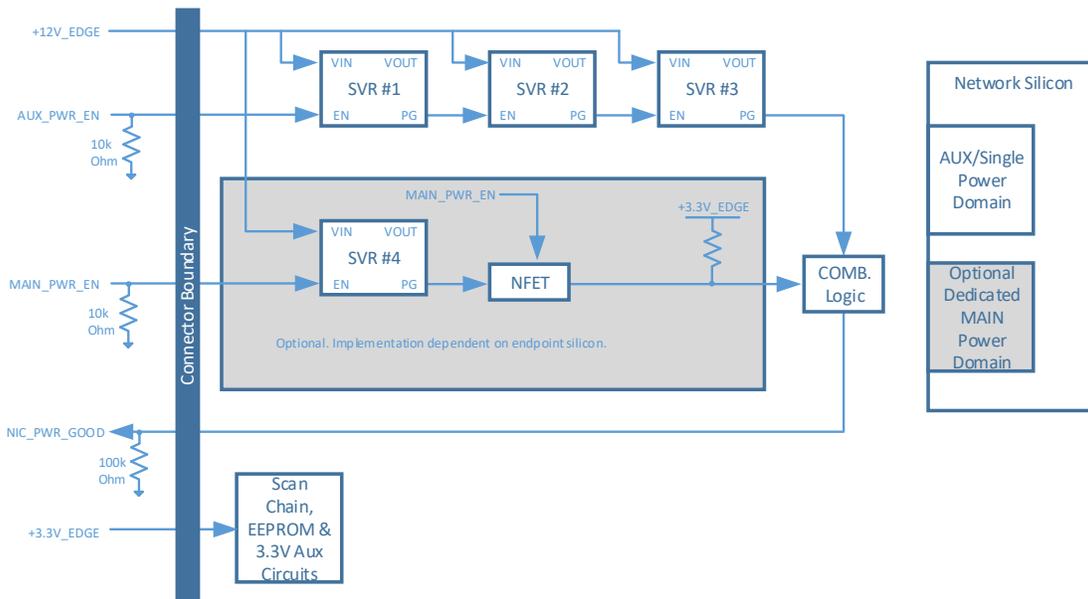

### 3.4.7 USB 2.0 (A68/A69) – Primary Connector Only

This section provides the pin assignments for the USB 2.0 interface signals. USB 2.0 is only defined for operation on the Primary Connector. USB 2.0 may be used for applications with end point silicon that requires a USB connection to the baseboard. Implementations may also allow for a USB-Serial or USB-JTAG translator for serial or JTAG applications. If multiple USB devices are required, an optional USB hub may be implemented on the OCP NIC 3.0 card. Downstream device discovery is completed as part of the bus enumeration per the USB 2.0 specification. A basic example connection diagram is shown in Figure 82. An example depicting USB-Serial and USB-JTAG connectivity with an USB hub is shown in Figure 83.

Table 28: Pin Descriptions – USB 2.0 – Primary Connector only

| Signal Name          | Pin #      | Baseboard Direction | Signal Description   |
|----------------------|------------|---------------------|--|
| USB_DATn<br>USB_DATp | A68<br>A69 | Bi-directional      | <p>USB 2.0 Differential Pair – Primary Connector Only.</p> <p>A baseboard implementation shall provide a USB connection to the OCP NIC 3.0 primary connector.</p> <p>NIC implementations that require USB shall connect the bus to the end point silicon. This pin shall be left as a no connect if it is not used on the OCP NIC 3.0 card.</p> <p>The USB pins shall be directly connected between the end point silicon or USB device and the card gold fingers.</p> |

|  |  |  |
|--|--|--|
|  |  | <p>The USB interface shall be based on a <math>V_{BUS} = 3.3V</math>. Both the baseboard and NIC device shall be capable of driving signals using 3.3V logic. The OCP NIC 3.0 card may implement protection diodes and is up to the adapter vendor for placement.</p> <p>To prevent leakage paths, a baseboard shall not use USB pull up resistors on the USB_DATp/n lines to indicate the bus data transmission rate. If used, pull up resistors shall only exist on the NIC side.</p> <p>The AUX_PWR_EN signal may be used for downstream USB devices that require a <math>V_{BUS}</math> connection for host detection. Examples of this may include USB-serial converting devices.</p> |
|--|--|--|

Figure 82: USB 2.0 Connection Example – Basic Connectivity


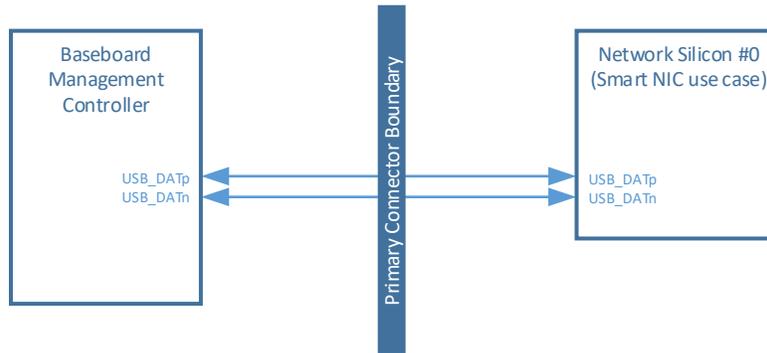


Figure 83: USB 2.0 Connection Example – USB-Serial / USB-JTAG Connectivity

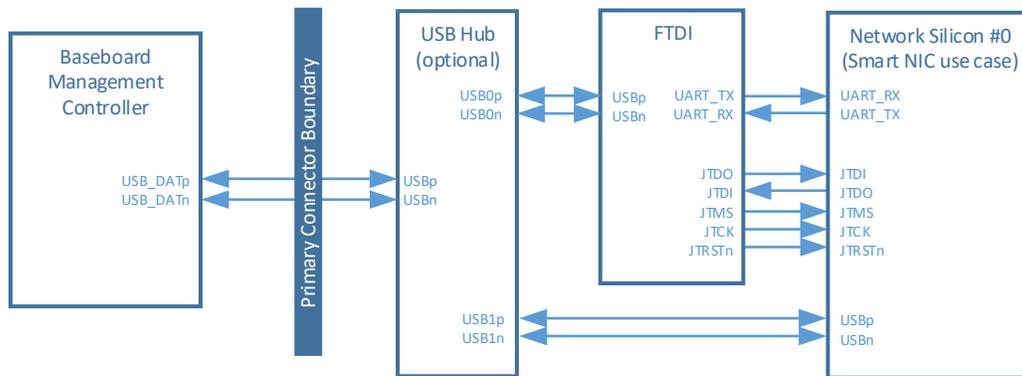


### 3.4.8 UART (A68/A69) – Secondary Connector Only

This section provides the pin assignments for the UART interface signals. UART is only defined for operation on the Secondary Connector. The UART pins may be used with end point silicon that require console redirection over the baseboard – such as Large Form-Factor SmartNICs. An example connection diagram is shown in Figure 84.

Table 29: Pin Descriptions – UART – Secondary Connector Only

| Signal Name | Pin # | Baseboard Direction | Signal Description   |
|-------------|-------|---------------------|--|
| UART_RX     | A68   | Input               | <p>UART Receive. +3.3V signaling levels. Secondary Connector Only.</p> <p>A baseboard implementations shall provide a UART receive connection from the OCP NIC 3.0 connector. The UART_RX pin shall be pulled up to +3.3V<sub>AUX</sub> on the baseboard to prevent erroneous data reception when the OCP NIC 3.0 card is powered off or not present.</p> <p>NIC implementations that require a UART shall connect the network silicon UART_RX pin to the UART_TX pin on the OCP NIC 3.0 connector. This pin shall be left as a no connect if it is not used on the OCP NIC 3.0 card.</p> <p>The UART_RX pin shall be buffered on the NIC to prevent a leakage path into unpowered silicon when the card is in ID Mode. The buffer may be controlled via a local “Power Good” indicator.</p> |
| UART_TX     | A69   | Output              | <p>UART Transmit. +3.3V signaling levels. Secondary Connector Only.</p> <p>A baseboard implementation shall provide a UART transmit connection to the OCP NIC 3.0 connector.</p> <p>NIC implementations that require a UART shall connect the UART_TX pin from the OCP NIC 3.0 connector to the target silicon UART_RX pin. This pin shall be left as a no connect if it is not used on the OCP NIC 3.0 card.</p> <p>The UART_TX pin shall be buffered on the NIC to prevent a leakage path into unpowered silicon when the card is in ID Mode. The buffer may be controlled via a local “Power Good” indicator.</p>   |

Figure 84: UART Connection Example

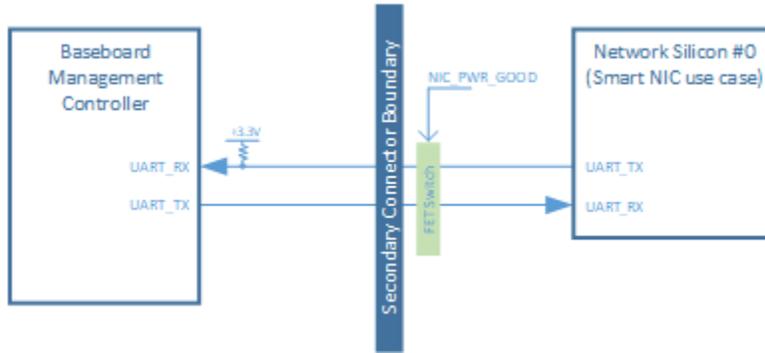

### 3.4.9 RFU[1:2] Pins

This section provides the pin assignments for the RFU[1:2] interface signals.

Table 30: Pin Descriptions – RFU[1:2]

| Signal Name | Pin # | Baseboard Direction | Signal Description   |
|-------------|-------|---------------------|--|
| RFU1, N/C   | B68   | Input / Output      | Reserved future use pins. These pins shall be left as no connect. These pins may also be used as a differential pair for future implementations.<br><br>The RFU[1:2] pins are defined on both the Primary and the Secondary Connector in this release of the OCP NIC 3.0 specification. A total of two reserved pins are available for the SFF; a total of four reserved pins are available the LFF. |
| RFU2, N/C   | B69   |                     |  |

### 3.5 PCIe Bifurcation Mechanism

OCP NIC 3.0 baseboards and OCP NIC 3.0 cards support multiple bifurcation combinations. Single socket baseboards with a single or multiple root ports, as well as multi-socket baseboards with a single or multiple root ports are supported. The bifurcation mechanism also supports OCP NIC 3.0 cards with a single or multiple end points. These features are accomplished via I/O pins on the Primary and Secondary Connector:

- PRSNTA#, PRSNTB[3:0]#. The PRSNTA# pin shall connect to the PRSNTB# pins as a hard coded value on the OCP NIC 3.0 card. The encoding of the PRSNTB[3:0]# pins allows the baseboard to determine the PCIe Links available on the OCP NIC 3.0 card.
- BIF[3:0]#. The BIF# pin states shall be controlled by the baseboard to allow the baseboard to override the default end point bifurcation for silicon that support bifurcation. Additional combinatorial logic is required and is specific to the card silicon. The combinatorial logic is not covered in this specification. The BIF[3:0]# pins may optionally be hardcoded for baseboards that do not require a dynamic bifurcation override.

A high level bifurcation connection diagram is shown in Figure 74.

#### 3.5.1 PCIe OCP NIC 3.0 Card to Baseboard Bifurcation Configuration (PRSNTA#, PRSNTB[3:0]#)

The OCP NIC 3.0 card to baseboard configuration mechanism consists of four dual use pins (PRSNTB[3:0]#) on the OCP NIC 3.0 card and a grounded PRSNTA# pin on the baseboard. These pins provide card presence detection as well as mechanism to notify the baseboard of the pre-defined PCIe lane width capabilities. The PRSNTB[3:0]# pins are pulled up to +3.3V\_EDGE on the baseboard and are active low signals. A state of 0b1111 indicates that no card is present in the system. Depending on the capabilities of the OCP NIC 3.0 card, a selection of PRSNTB[3:0]# signals may be strapped to the PRSNTA# signal and is pulled low by the baseboard. The encoding of the PRSNTB[3:0]# bits is shown in Table 31 for x16 and x8 PCIe cards.

#### 3.5.2 PCIe Baseboard to OCP NIC 3.0 Card Bifurcation Configuration (BIF[2:0]#)

Three signals (BIF[2:0]#) are driven by the baseboard to notify requested bifurcation on the OCP NIC 3.0 card silicon. This allows the baseboard to set the lane configuration on the OCP NIC 3.0 card that supports multiple bifurcation options.

For example, a baseboard that has four separate hosts that support a 4 x4 connection, should appropriately drive the BIF[2:0]# pins per Table 31 and indicate to the OCP NIC 3.0 card silicon to setup a 4 x4 configuration.

As previously noted, the BIF[2:0]# signals require additional combinatorial logic to decode the BIF[2:0]# value and appropriately apply it to the end-point silicon. The combinatorial logic is not covered in the specification as its implementation is specific to the vendor silicon used.

### 3.5.3 PCIe Bifurcation Decoder

The combination of the PRSNTB[3:0]# and BIF[2:0]# pins deterministically sets the PCIe lane width for a given combination of baseboard and OCP NIC 3.0 cards. Table 31 shows the resulting number of PCIe links and its width for known combinations of baseboards and OCP NIC 3.0 cards.

**Note 1:** The baseboard must disable PCIe lanes during the initialization phase if the number of detected PCIe links are greater than what is supported on the baseboard to prevent a nondeterministic solution. For example, if the baseboard only supports a 1 x16 connection, and the OCP NIC 3.0 card only supports a 2 x8 connection, the baseboard must disable PCIe lanes 8-15 to prevent any potential LTSSM issues during the discovery phase.

**Note 2:** Due to separate PCIe REFCLKs and power state timing differences in multi-host configurations, Table 31 shows the expected resulting links for a given baseboard and OCP NIC 3.0 card combination.



### 3.5.4 Bifurcation Detection Flow

The following detection flow shall be used to determine the resulting link count and lane width based on the baseboard and OCP NIC 3.0 card configurations.

1. The baseboard shall read the state of the PRSNTB[3:0]# pins. An OCP NIC 3.0 card is present in the system if the resulting value is not 0b1111.
2. Firmware determines the OCP NIC 3.0 card PCIe lane width capabilities per Table 31 by reading the PRSNTB[3:0]# pins.
3. The baseboard reconfigures the PCIe bifurcation on its ports to match the highest common lane width and lowest common link count on the card.
4. For cases where the baseboard request a link count override (such as requesting a 4-host baseboard requesting 4 x4 operation on a supported card that would otherwise default to a 2 x8 case), the BIF[0:2]# pins shall be asserted as appropriate. Asserting the BIF[0:2]# pins assumes the OCP NIC 3.0 card supports the requested link override.
5. The BIF[0:2]# pins must be in their valid states upon the assertion of AUX\_PWR\_EN.
6. AUX\_PWR\_EN is asserted. An OCP NIC 3.0 card is allowed a max ramp time  $T_{APL}$  between AUX\_PWR\_EN assertion and NIC\_PWR\_GOOD assertion.
7. MAIN\_PWR\_EN is asserted. An OCP NIC 3.0 card is allowed a max ramp time  $T_{MPL}$  between MAIN\_PWR\_EN assertion and NIC\_PWR\_GOOD reassertion. For cards that do not have a separate AUX and MAIN power domain, this state is an unconditional transition to NIC\_PWR\_GOOD
8. The PCIe REFCLK shall become valid a minimum of 100 $\mu$ s before the deassertion of PERST#.
9. PERST# shall be deasserted >1s after NIC\_PWR\_GOOD assertion as defined in Figure 94. Refer to Section 3.12 for timing details.


### 3.5.5 PCIe Bifurcation Examples

For illustrative purposes, the following figures show several common bifurcation permutations.

#### 3.5.5.1 Single Host (1 x16) Baseboard with a 1 x16 OCP NIC 3.0 Card (Single Controller)

Figure 85 illustrates a single host baseboard that supports x16 with a single controller OCP NIC 3.0 card that also supports x16. The PRSTNB[3:0]# state is 0b0111. The BIF[2:0]# state is 0b000 to set the card as a 1x16 for bifurcation capable controllers. For controllers without bifurcation support, the BIF[2:0] pin connections are not required on the card. The PRSNTB encoding notifies the baseboard that this card is only capable of 1 x16. The single host baseboard determines that it is also capable of supporting 1 x16. The resulting link width is 1 x16.


Figure 85: Single Host (1 x16) and 1 x16 OCP NIC 3.0 Card (Single Controller)

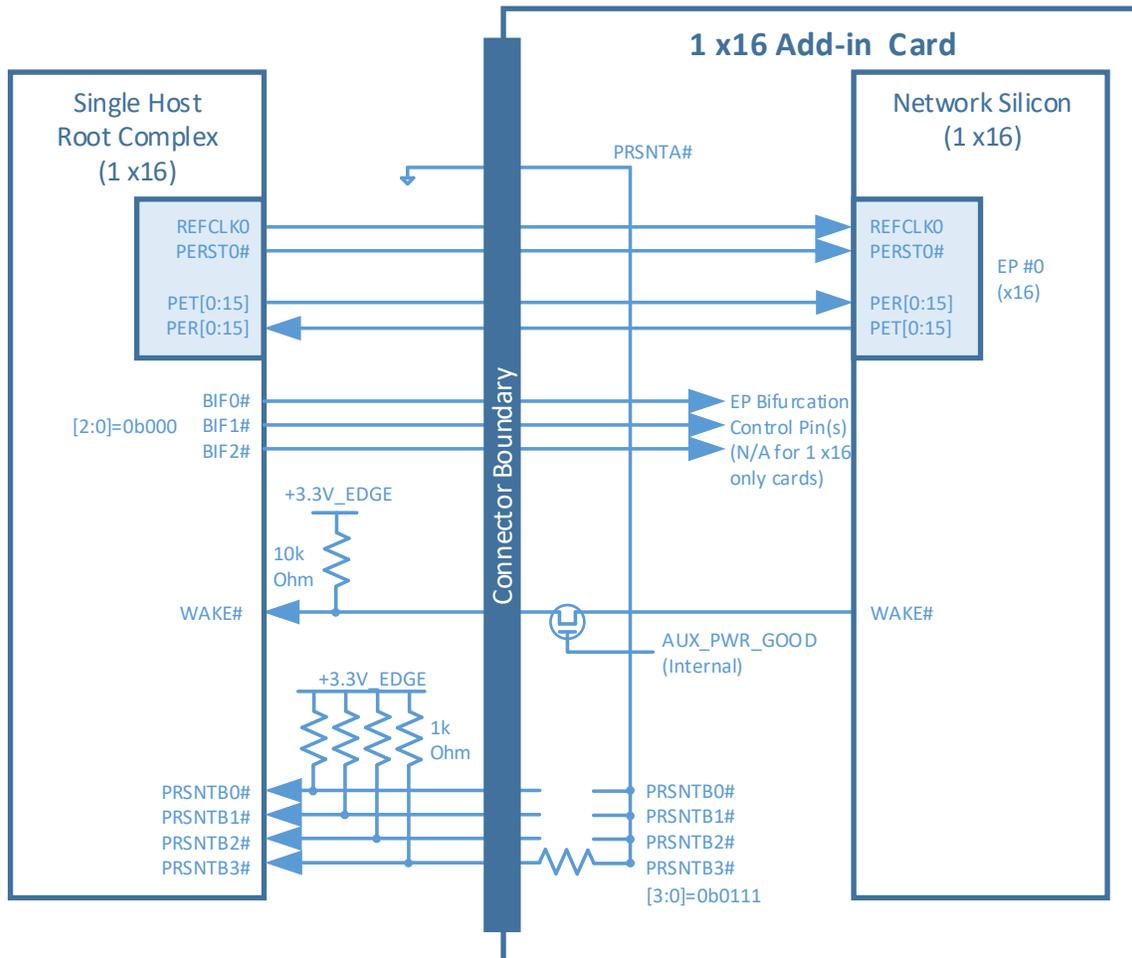

### 3.5.5.2 Single Host (2 x8) Baseboard with a 2 x8 OCP NIC 3.0 Card (Dual Controllers)

Figure 86 illustrates a single host baseboard that supports 2 x8 with a single controller OCP NIC 3.0 card that also supports 2 x8 with dual controllers. The PRSTNB[3:0]# state is 0b0110. The BIF[2:0]# state is 0b000 in this example because the network card only supports a 2x8. The PRSNTB encoding notifies the baseboard that this card is only capable of 2 x8. The single host baseboard determines that it is also capable of supporting 2 x8. The resulting link width is 2 x8.


Figure 86: Single Host (2 x8) and 2 x8 OCP NIC 3.0 Card (Dual Controllers)

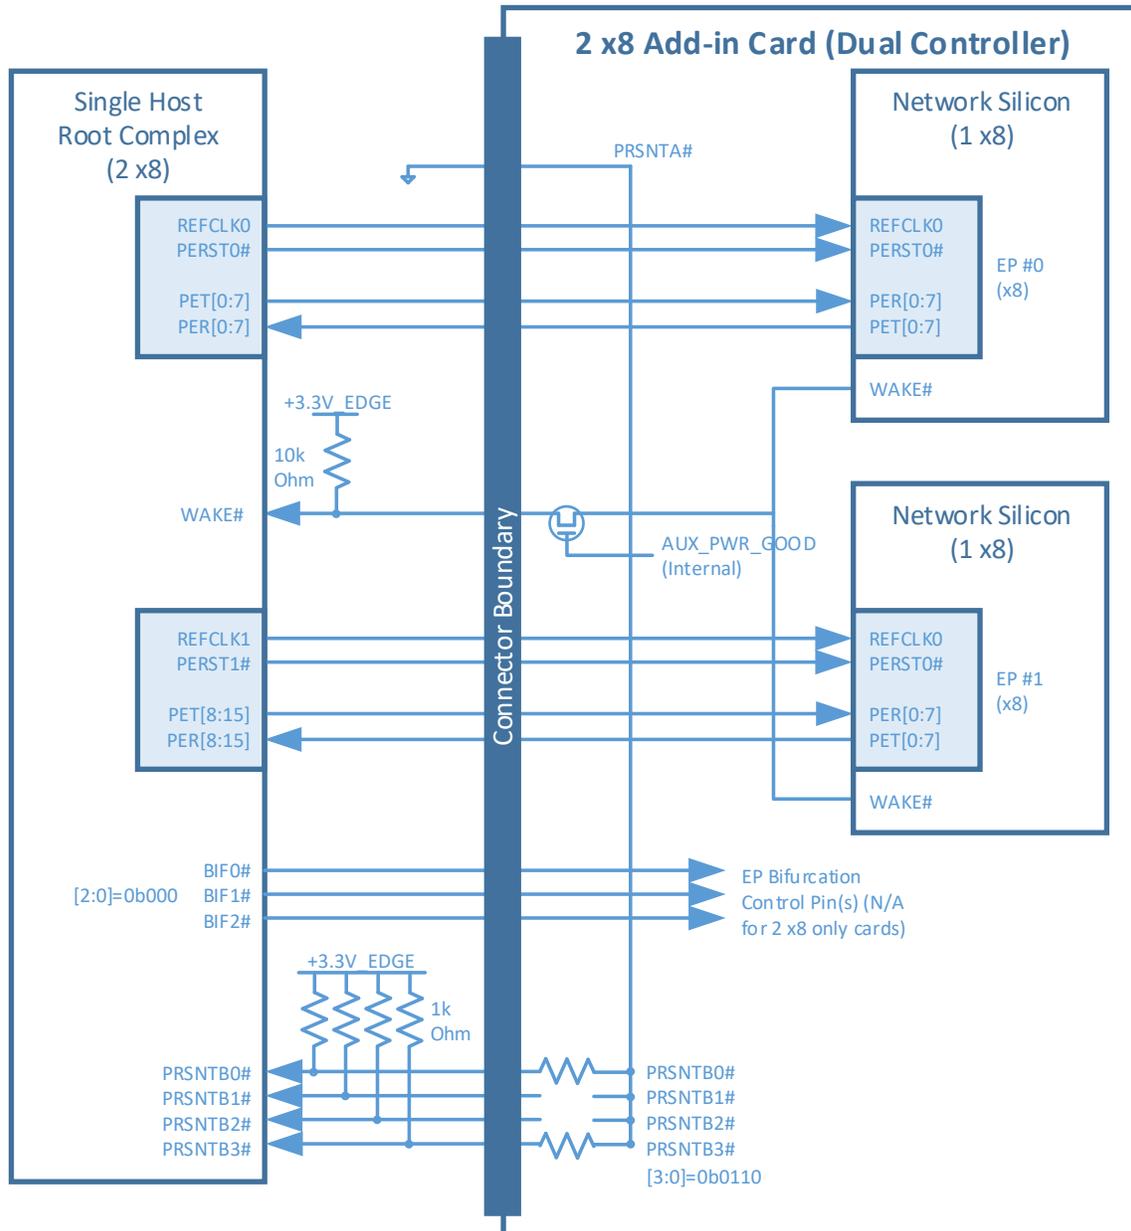

### 3.5.5.3 Quad Host (4 x4) Baseboard with a 4 x4 OCP NIC 3.0 Card (Single Controller)

Figure 87 illustrates a quad host baseboard that supports 4 x4 with a single controller OCP NIC 3.0 card that supports 1 x16, 2 x8 and 4 x4. The PRSTNB[3:0]# state is 0b0100. The BIF[2:0]# state in this example is 0b110 as the end point network controller is forced to bifurcate to 4 x4. The PRSNTB encoding notifies the baseboard that this card is only capable of 1 x16, 2 x8 and 4 x4. The quad host baseboard determines that it is also capable of supporting 4 x4. The resulting link width is 4 x4.


Figure 87: Quad Hosts (4 x4) and 4 x4 OCP NIC 3.0 Card (Single Controller)

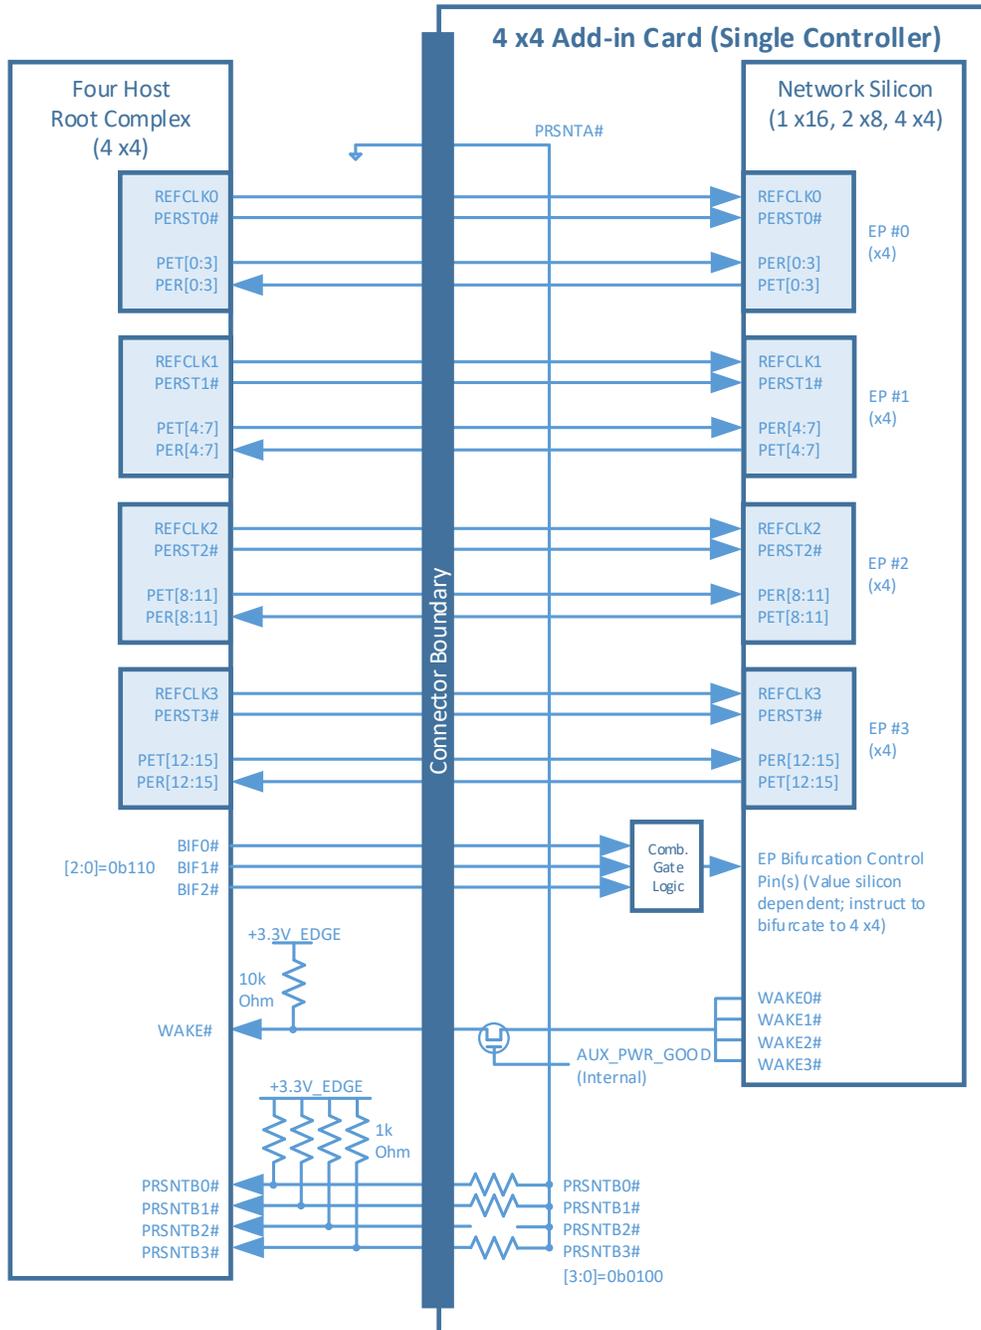

### 3.5.5.4 Quad Host (4 x4) Baseboard with a 4 x4 OCP NIC 3.0 Card (Quad Controllers)

Figure 88 illustrates a quad host baseboard that supports 4 x4 with a quad controller OCP NIC 3.0 card that supports 4 x4. The PRSTNB[3:0]# state is 0b0011. The BIF[2:0]# state is a don't care value as there is no need to instruct the end-point network controllers to a specific bifurcation (each controller only supports 1x4 in this example). The PRSNTB encoding notifies the baseboard that this card is only capable of 4 x4. The quad host baseboard determines that it is also capable of supporting 4 x4. The resulting link width is 4 x4.


Figure 88: Quad Hosts (4 x4) and 4 x4 OCP NIC 3.0 Card (Quad Controllers)

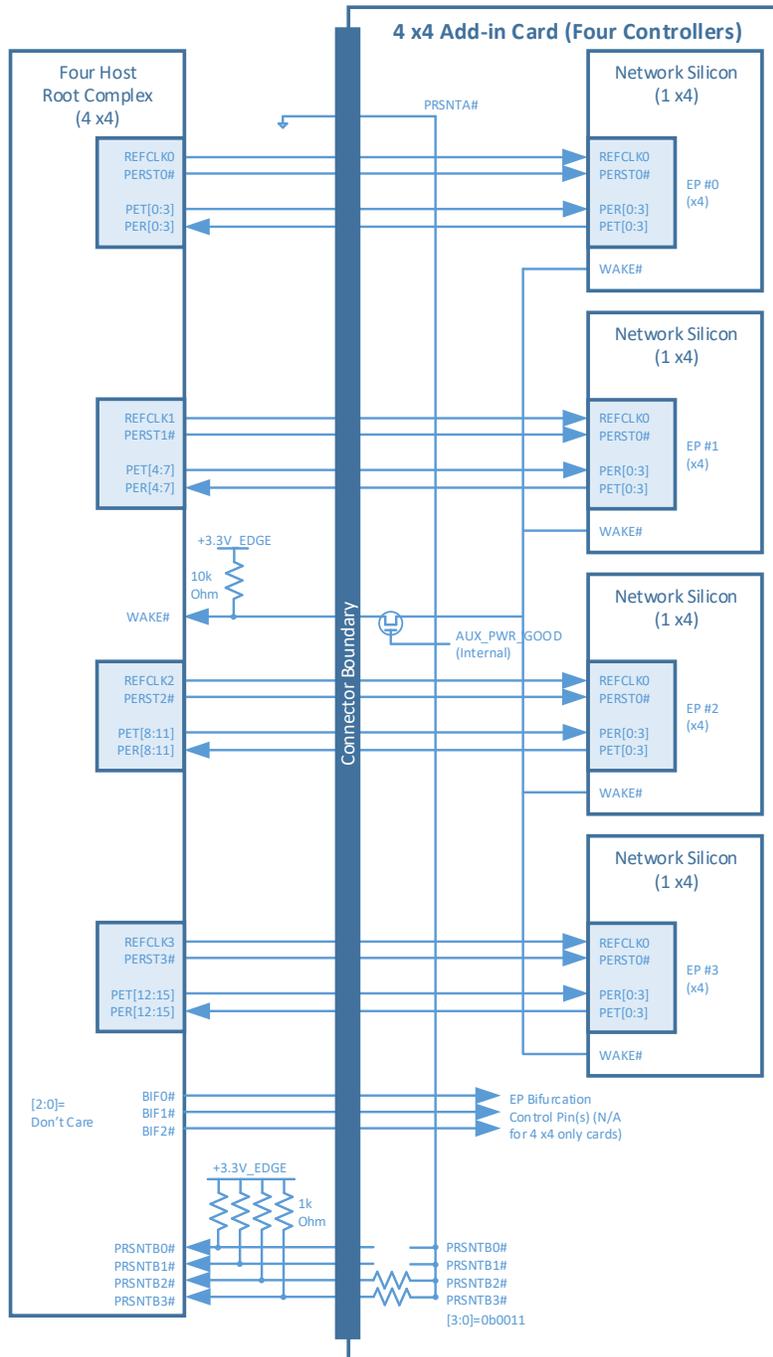

3.5.5.5 Single Host (1 x16, no Bifurcation) Baseboard with a 2 x8 OCP NIC 3.0 Card (Dual Controller)

Figure 89 illustrates a single host baseboard that supports 1 x16 with a dual controller OCP NIC 3.0 card that supports 2 x8. The PRSTNB[3:0]# state is 0b0110. The BIF[2:0]# state is 0b000 as each silicon instance only supports 1x8. The PRSNTB encoding notifies the baseboard that this card is only capable of 2 x8. The quad host baseboard determines that it is capable of 1x 16, but down shifts to 1 x8. The resulting link width is 1 x8 and only on endpoint 0.

Figure 89: Single Host with no Bifurcation (1 x16) and 2 x8 OCP NIC 3.0 Card (Dual Controllers)

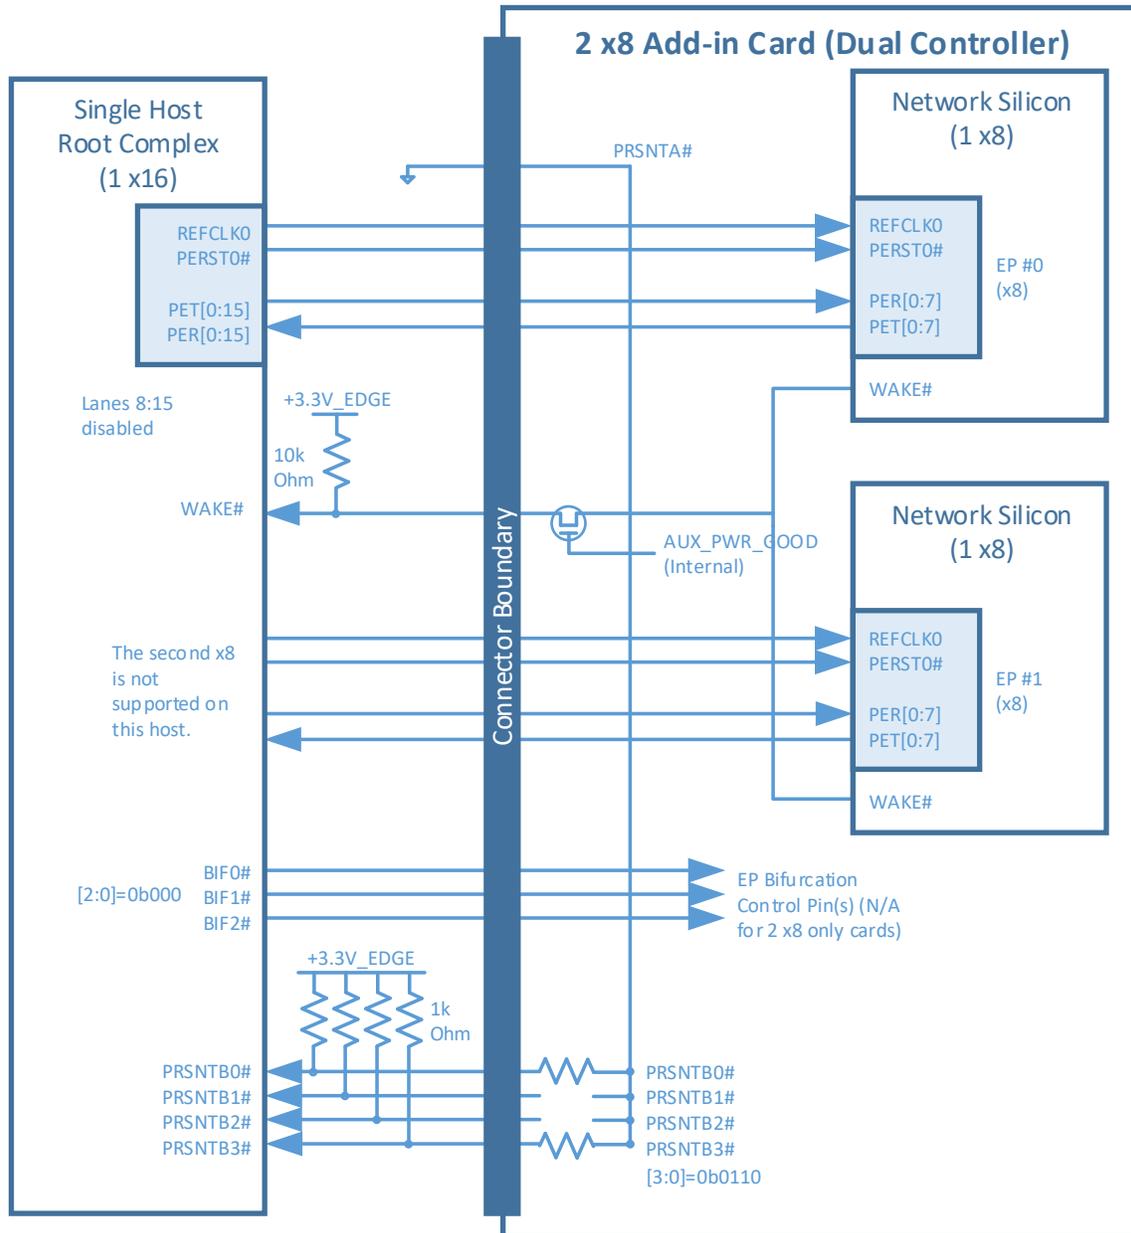

### 3.6 PCIe Clock Topology

The OCP NIC 3.0 specification allows for up to four PCIe REFCLKs on the Primary Connector and up to two PCIe REFCLKs on the Secondary Connector. In general, the association of each REFCLK is based on the PCIe Link number on a per connector basis and is shown in Table 32. Cards that implement both the Primary and Secondary Connectors have a total of up to 6 REFCLKs.

Table 32: PCIe Clock Associations

| REFCLK # | Description                    | Availability (Connector)          |
|----------|--------------------------------|-----------------------------------|
| REFCLK0  | REFCLK associated with Link 0. | Primary and Secondary Connectors. |
| REFCLK1  | REFCLK associated with Link 1. | Primary and Secondary Connectors. |
| REFCLK2  | REFCLK associated with Link 2. | Primary Connector only.           |
| REFCLK3  | REFCLK associated with Link 3. | Primary Connector only.           |

For each OCP NIC 3.0 card, the following REFCLK connection rules must be followed:

- For a 1 x16 capable OCP NIC 3.0 card, REFCLK0 shall be used for lanes [0:15].
- For a 2 x8 capable OCP NIC 3.0 card, REFCLK0 shall be used for lanes [0:7] and REFCLK1 shall be used for lanes [8:15].
  - For a 4 x4 capable OCP NIC 3.0 card, REFCLK0 shall be used for lanes [0:3], REFCLK1 shall be used for lanes [4:7], REFCLK2 shall be used for lanes [8:11] and REFCLK3 shall be used for lanes [12:15]. Pins for REFCLK2 and REFCLK3 are located on the 28-pin OCP bay.

Figure 90: PCIe Interface Connections for 1 x16 and 2 x8 OCP NIC 3.0 Cards


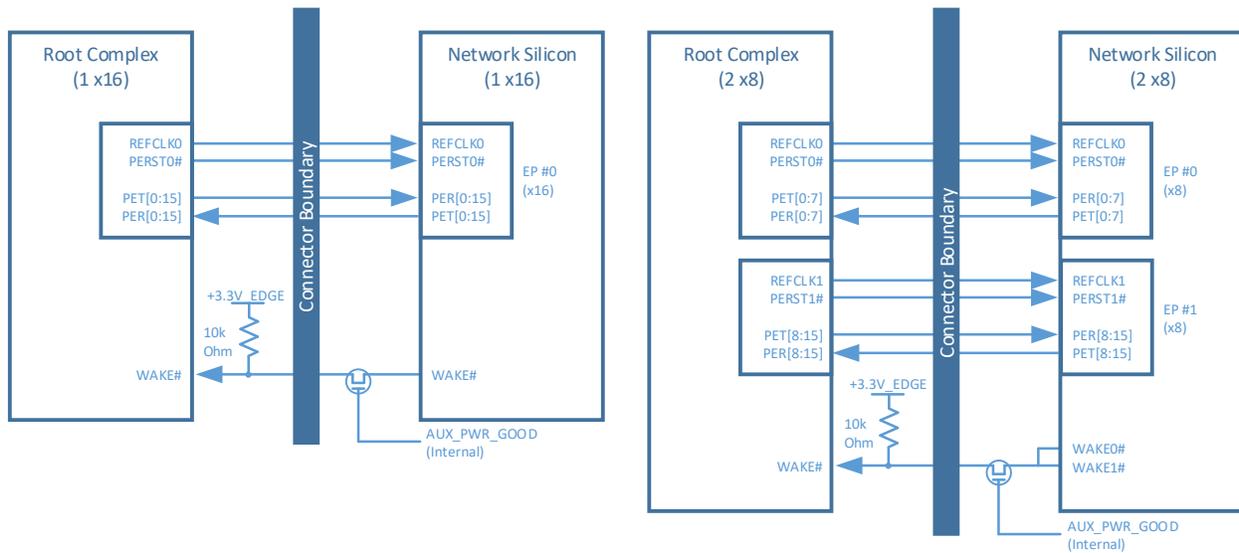


Figure 91: PCIe Interface Connections for a 4 x4 OCP NIC 3.0 Card

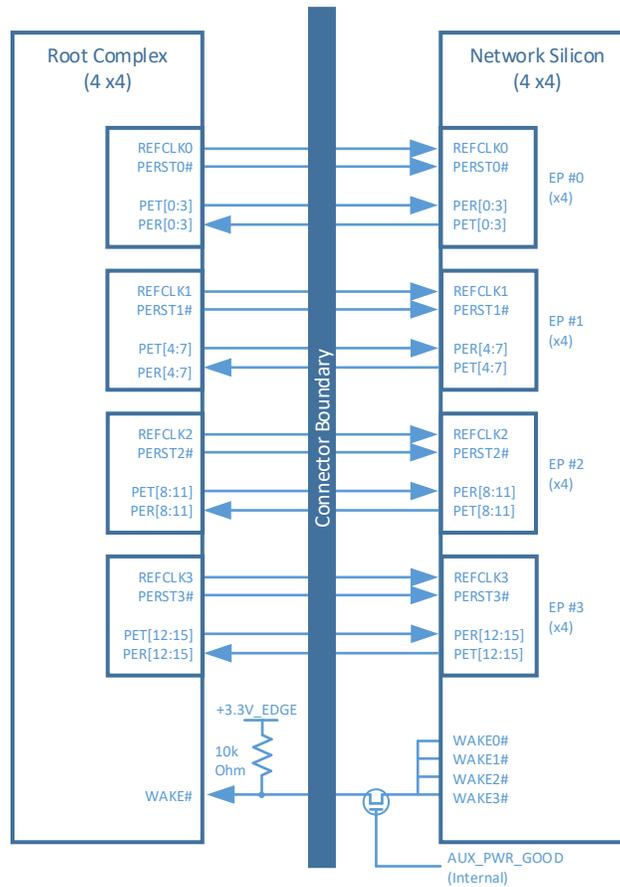

### 3.7 PCIe Bifurcation Results and REFCLK Mapping

For the cases where the baseboard and OCP NIC 3.0 card bifurcation are permissible, this section enumerates all of the supported PCIe link, lane and REFCLK mappings for each supported configuration. The bifurcation decoder is shown in Section 3.5.3.





Table 35: Bifurcation for Single Host, Single Socket and Single/Dual/Quad Upstream Links  
(BIF[2:0]#=0b000)

| Single Host, Single Upstream Socket, One, Two or Four Upstream Links |                 | Key: Cells shown as Link Lane (e.g. Lk0/Ln0); HD = Host Disabled Lane |       |                  |                 |            |                |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |
|--|-----------------|---|-------|------------------|-----------------|------------|----------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Min Card Width   | Card Short Name | Supported Bifurcation Modes   | Host  | Upstream Devices | Upstream Links  | BIF [2:0]# | Resulting Link | Ln 0     | Ln 1     | Ln 2     | Ln 3     | Ln 4     | Ln 5     | Ln 6     | Ln 7     | Ln 8     | Ln 9     | Ln 10    | Ln 11    | Ln 12    | Ln 13    | Ln 14    | Ln 15    |
| 1x16, 1x8, 1x4, 1x2, 1x1   |                 | Card/Not Present  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0000     | 1x8            | Lk0, Ln0 |
| 2x8, 2x4, 2x2, 2x1   |                 | Card/Not Present  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0000     | 1x8            | Lk0, Ln0 |
| 4x4, 4x2, 4x1  |                 | Card/Not Present  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0000     | 1x4            | Lk0, Ln0 |
| 2C   | 1x8 Option A    | 1x8, 1x4, 1x2, 1x1  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1110     | 1x2            | Lk0, Ln0 |
| 2C   | 1x4             | 1x4, 1x2, 1x1   | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1110     | 1x1            | Lk0, Ln0 |
| 2C   | 1x2             | 1x2, 1x1  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1110     | 1x1            | Lk0, Ln0 |
| 2C   | 1x1             | 1x1   | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1110     | 1x1            | Lk0, Ln0 |
| 2C   | 1x8 Option B    | 1x8, 1x4, 1x2, 1x1  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1101     | 1x8            | Lk0, Ln0 |
| 2C   | 2x8 Option B    | 2x8, 2x4, 2x2, 2x1  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1101     | 2x8            | Lk0, Ln0 |
| 4C   | 2x8 Option B    | 4x4, 4x2, 4x1   | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1100     | 1x8            | Lk0, Ln0 |
| 2C   | 1x8 Option D    | 1x8, 1x4, 2x4, 4x2 (First 8 lanes), 4x1                               | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1100     | 1x8            | Lk0, Ln0 |
| 4C   | 1x16 Option D   | 1x16, 1x8, 1x4, 2x8, 2x4, 4x2 (First 8 lanes), 4x1                    | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1100     | 1x16           | Lk0, Ln0 |
| RSVD   | RSVD            | RSVD  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1011     | -              | Lk0, Ln0 |
| 2C   | 2x4             | 2x4, 2x2, 2x1   | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1010     | 2x4            | Lk0, Ln0 |
| 2C   | 4x2             | 4x2, 2x1  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1001     | 2x2            | Lk0, Ln0 |
| RSVD   | RSVD            | RSVD for future x8 encoding   | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b1000     | -              | Lk0, Ln0 |
| 4C   | 1x16 Option A   | 1x16, 1x8, 1x4, 1x2, 1x1  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0111     | 1x16           | Lk0, Ln0 |
| 4C   | 2x8 Option A    | 2x8, 2x4, 2x2, 2x1  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0110     | 2x8            | Lk0, Ln0 |
| 4C   | 1x16 Option B   | 1x16, 1x8, 1x4, 1x2, 1x1  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0101     | 1x16           | Lk0, Ln0 |
| 4C   | 1x16 Option C   | 2x8, 2x4, 2x2, 2x1  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0100     | 1x16           | Lk0, Ln0 |
| 4C   | 4x4             | 4x4, 4x2, 4x1   | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0011     | 4x4            | Lk0, Ln0 |
| RSVD   | RSVD            | RSVD  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0010     | -              | Lk0, Ln0 |
| RSVD   | RSVD            | RSVD  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0001     | -              | Lk0, Ln0 |
| RSVD   | RSVD            | RSVD  | 1Host | 1Upstream Socket | 1,2, or 4 Links | 0b0000     | -              | Lk0, Ln0 |

Table 36: Bifurcation for Single Host, Dual Sockets and Dual Upstream Links (BIF[2:0]#=0b001)

| Single Host, Two Upstream Sockets, Two Upstream Links |                 |                             |                                   |       |                    |                |            |                       |          | Key: Cells shown as Link/Lane (e.g. Lk0/Ln0); HD = Host Disabled Lane |          |          |          |          |          |          |     |     |      |      |      |      |      |      |
|---|-----------------|-----------------------------|-----------------------------------|-------|--------------------|----------------|------------|-----------------------|----------|---|----------|----------|----------|----------|----------|----------|-----|-----|------|------|------|------|------|------|
| Min Card Width  | Card Short Name | Supported Bifurcation Modes | Add-in-Card Encoding PRSMTB(3:0)# | Host  | Upstream Devices   | Upstream Links | BIF [2:0]# | Resulting Link        | Ln0      | Ln1   | Ln2      | Ln3      | Ln4      | Ln5      | Ln6      | Ln7      | Ln8 | Ln9 | Ln10 | Ln11 | Ln12 | Ln13 | Ln14 | Ln15 |
| nila  | Not Present     | Card Not Present            | 0b1111                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | -                     | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 2C  | 1x8 Option A    | 1x8, 1x4, 1x2, 1x1          | 0b1110                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 1x8 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 2C  | 1x4             | 1x4, 1x2, 1x1               | 0b1110                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 1x4 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 2C  | 1x2             | 1x2, 1x1                    | 0b1110                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 1x2 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 2C  | 1x1             | 1x1                         | 0b1110                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 1x1 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 2C  | 1x8 Option B    | 1x8, 1x4, 1x2, 1x1          | 0b1101                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 1x8 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 4C  | 2x8 Option B    | 2x8, 2x4, 2x2, 2x1          | 0b1101                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 2x8 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 4C  | 2x8 Option C    | 4x4, 4x2, 4x1               | 0b1100                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 1x8 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 2C  | 1x8 Option D    | 4x2 (First 8 lanes), 4x1    | 0b1100                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 2x8                   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 4C  | 1x16 Option D   | 1x16, 1x8, 1x4              | 0b1100                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 2x8                   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| RSVD  | RSVD            | RSVD                        | 0b1011                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | -                     | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 2C  | 2x4             | 2x4, 2x2, 2x1               | 0b1010                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 1x4 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 2C  | 1x4             | 1x4, 1x2, 1x1               | 0b1001                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 1x2 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 2C  | 4x2             | 2x2, 2x1                    | 0b1001                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 1x2 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| RSVD  | RSVD            | RSVD for future x8 encoding | 0b1000                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | -                     | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 4C  | 1x16 Option A   | 1x16, 1x8, 1x4, 1x2, 1x1    | 0b0111                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 1x8 (Socket 0 only)   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 4C  | 2x8 Option A    | 2x8, 2x4, 2x2, 2x1          | 0b0110                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 2x8                   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 4C  | 1x16 Option B   | 1x16, 1x8, 1x4, 1x2, 1x1    | 0b0101                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 2x8                   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 4C  | 1x16 Option C   | 2x8, 2x4, 2x2, 2x1          | 0b0100                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 2x8                   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 4C  | 1x16 Option C   | 4x4, 4x2, 4x1               | 0b0100                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 2x8                   | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| 4C  | 4x4             | 4x4, 4x2, 4x1               | 0b0011                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | 2x4 (EP 0 and 2 only) | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| RSVD  | RSVD            | RSVD                        | 0b0010                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | -                     | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| RSVD  | RSVD            | RSVD                        | 0b0001                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | -                     | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |
| RSVD  | RSVD            | RSVD                        | 0b0000                            | 1Host | 2 Upstream Sockets | 2 Links        | 0b001      | -                     | Lk0, Ln0 | Lk0, Ln1  | Lk0, Ln2 | Lk0, Ln3 | Lk0, Ln4 | Lk0, Ln5 | Lk0, Ln6 | Lk0, Ln7 |     |     |      |      |      |      |      |      |



Table 38: Bifurcation for Single Host, Quad Sockets and Quad Upstream Links – First 8 PCIe Lanes  
(BIF[2:0]#=0b011)

| Single Host, Four Upstream Sockets, Four Upstream Links – First 8 lanes |               |                             |                                    |                                     |       |                    |                |            |                         |            |      |      |      |            |            |            |      |      |      |       |       |       |       |       |       |
|---|---------------|-----------------------------|------------------------------------|-------------------------------------|-------|--------------------|----------------|------------|-------------------------|------------|------|------|------|------------|------------|------------|------|------|------|-------|-------|-------|-------|-------|-------|
| Min Card Width  | Card Name     | Card Short Name             | Supported Bifurcation Modes        | Add-in-Card Encoding P/N(ITE)(3:0)# | Host  | Upstream Devices   | Upstream Links | BIF [2:0]# | Resulting Link          | Ln 0       | Ln 1 | Ln 2 | Ln 3 | Ln 4       | Ln 5       | Ln 6       | Ln 7 | Ln 8 | Ln 9 | Ln 10 | Ln 11 | Ln 12 | Ln 13 | Ln 14 | Ln 15 |
| 2C  | Not Present   | Card Not Present            | 1x8, 1x4, 1x2, 1x1                 | 0b-1111                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 1x2 (Socket 0 only)     | Lk 0, Ln 0 |      |      |      |            |            |            |      |      |      |       |       |       |       |       |       |
| 2C  | 1x8 Option A  | 1x4, 1x2, 1x1               | 1x8, 1x4, 1x2, 1x1                 | 0b-1110                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 1x2 (Socket 0 only)     | Lk 0, Ln 0 |      |      |      |            |            |            |      |      |      |       |       |       |       |       |       |
| 2C  | 1x4           | 1x2, 1x1                    | 1x4, 1x2, 1x1                      | 0b-1110                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 1x2 (Socket 0 only)     | Lk 0, Ln 0 |      |      |      |            |            |            |      |      |      |       |       |       |       |       |       |
| 2C  | 1x2           | 1x1                         | 1x2, 1x1                           | 0b-1110                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 1x1 (Socket 0 only)     | Lk 0, Ln 0 |      |      |      |            |            |            |      |      |      |       |       |       |       |       |       |
| 2C  | 1x8 Option B  | 2x4, 2x2, 2x1               | 1x8, 1x4, 1x2, 1x1                 | 0b-1101                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 2x2 (Socket 0 & 2 only) | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 |            |            |      |      |      |       |       |       |       |       |       |
| 4C  | 2x8 Option B  | 4x4, 4x2, 4x1               | 2x8, 2x4, 2x2, 2x1                 | 0b-1101                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 2x2 (Socket 0 & 2 only) | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 |            |            |      |      |      |       |       |       |       |       |       |
| 2C  | 1x8 Option D  | 2x4, 2x2, 2x1               | 1x8, 1x4, 2x4, 4x2, 4x1            | 0b-1100                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 4x2                     | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 | Lk 2, Ln 2 | Lk 3, Ln 3 |      |      |      |       |       |       |       |       |       |
| 2C  | 2x4           | RSVD                        | 2x4, 2x2, 2x1                      | 0b-1011                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | -                       | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 |            |            |      |      |      |       |       |       |       |       |       |
| 2C  | 1x4           | 1x2, 1x1                    | 1x4, 1x2, 1x1                      | 0b-1010                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 2x2 (Socket 0 & 2 only) | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 | Lk 2, Ln 2 | Lk 3, Ln 3 |      |      |      |       |       |       |       |       |       |
| 2C  | 2x2, 2x1      | RSVD                        | 4x2 (First 8 lanes), 4x1           | 0b-1001                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 4x2                     | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 | Lk 2, Ln 2 | Lk 3, Ln 3 |      |      |      |       |       |       |       |       |       |
| 2C  | 4x2           | RSVD                        | 1x2, 1x1                           | 0b-0000                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | -                       | Lk 0, Ln 0 |      |      |      |            |            |            |      |      |      |       |       |       |       |       |       |
| 4C  | 1x16 Option A | RSVD for future x8 encoding | 1x16, 1x8, 1x4, 1x2, 1x1           | 0b-0111                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 1x2 (Socket 0 only)     | Lk 0, Ln 0 |      |      |      |            |            |            |      |      |      |       |       |       |       |       |       |
| 4C  | 2x8 Option A  | 2x8, 2x4, 2x2, 2x1          | 2x8, 2x4, 2x2, 2x1                 | 0b-0110                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 2x2 (Socket 0 & 2 only) | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 |            |            |      |      |      |       |       |       |       |       |       |
| 4C  | 1x16 Option B | 1x16, 1x8, 1x4, 1x2, 1x1    | 1x16, 1x8, 1x4, 1x2, 1x1           | 0b-0101                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 1x2 (Socket 0 only)     | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 |            |            |      |      |      |       |       |       |       |       |       |
| 4C  | 1x16 Option C | 2x8, 2x4, 2x2, 2x1          | 1x16, 1x8, 1x4, 2x8, 2x4, 2x2, 2x1 | 0b-0100                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 2x2 (Socket 0 & 2 only) | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 |            |            |      |      |      |       |       |       |       |       |       |
| 4C  | 1x16 Option C | 4x4, 4x2, 4x1               | 4x4, 4x2, 4x1                      | 0b-0011                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 2x2 (Socket 0 & 2 only) | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 |            |            |      |      |      |       |       |       |       |       |       |
| 4C  | 4x4           | RSVD                        | 4x4, 4x2, 4x1                      | 0b-0010                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | 2x2 (Socket 0 & 2 only) | Lk 0, Ln 0 |      |      |      | Lk 1, Ln 1 |            |            |      |      |      |       |       |       |       |       |       |
| RSVD  | RSVD          | RSVD                        | RSVD                               | 0b-0001                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | -                       | Lk 0, Ln 0 |      |      |      |            |            |            |      |      |      |       |       |       |       |       |       |
| RSVD  | RSVD          | RSVD                        | RSVD                               | 0b-0000                             | 1Host | 4 Upstream Sockets | 4 Links        | 0b011      | -                       | Lk 0, Ln 0 |      |      |      |            |            |            |      |      |      |       |       |       |       |       |       |



Table 40: Bifurcation for Quad Host, Quad Sockets and Quad Upstream Links (BIF[2:0]#=0b110)

| Quad Host, Four Upstream Sockets, Four Upstream Links |               |                             |                               |                                   |        |                    |                |            |                       | Key: Cells shown as Link/Lane (e.g. Lk0/Ln0); HD = Host Disabled Lane |          |          |          |     |     |     |     |     |     |      |      |      |      |      |      |
|---|---------------|-----------------------------|-------------------------------|-----------------------------------|--------|--------------------|----------------|------------|-----------------------|---|----------|----------|----------|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Min Card Width  | Card Name     | Card Short Modes            | Supported Bifurcation Modes   | Add-in-Card Encoding PRSNTB[3:0]# | Host   | Upstream Devices   | Upstream Links | BIF [2:0]# | Resulting Link        | Ln0   | Ln1      | Ln2      | Ln3      | Ln4 | Ln5 | Ln6 | Ln7 | Ln8 | Ln9 | Ln10 | Ln11 | Ln12 | Ln13 | Ln14 | Ln15 |
| n/a   | Not Present   | Card Not Present            | Card Not Present              | 0b1111                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | -                     | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln2 | Lk0, Ln3 |     |     |     |     |     |     |      |      |      |      |      |      |
| 2C  | 1x8 Option A  | 1x8, 1x4, 1x2, 1x1          | 1x8, 1x4, 1x2, 1x1            | 0b1110                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 1x4 (Host 0 only)     | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 2C  | 1x4           | 1x4, 1x2, 1x1               | 1x4, 1x2, 1x1                 | 0b1110                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 1x4 (Host 0 only)     | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 2C  | 1x2           | 1x2, 1x1                    | 1x2, 1x1                      | 0b1110                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 1x2 (Host 0 only)     | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 2C  | 1x1           | 1x1                         | 1x1                           | 0b1110                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 1x1 (Host 0 only)     | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 2C  | 1x8 Option B  | 1x8, 1x4, 1x2, 1x1          | 1x8, 1x4, 1x2, 1x1            | 0b1101                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 2x4                   | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 4C  | 2x8 Option B  | 2x8, 2x4, 2x2, 2x1          | 2x8, 2x4, 2x2, 2x1            | 0b1101                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 4x4                   | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 4C  | 2x8 Option D  | 2x8, 1x4                    | 2x8, 1x4                      | 0b1100                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 2x4                   | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 4C  | 1x16 Option D | 1x16, 1x8, 1x4              | 4x4, 4x2 (First 8 lanes), 4x1 | 0b1100                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 4x4                   | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| RSVD  | RSVD          | RSVD                        | RSVD                          | 0b1011                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | -                     | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 2C  | 2x4           | 1x4, 1x2, 1x1               | 1x4, 1x2, 1x1                 | 0b1010                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 2x4                   | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 2C  | 4x2           | 2x2, 2x1                    | 4x2 (First 8 lanes), 4x1      | 0b1001                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 2x2                   | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| RSVD  | RSVD          | RSVD for future x8 encoding | RSVD for future x8 encoding   | 0b1000                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | -                     | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 4C  | 1x16 Option A | 2x8, 2x4, 2x2, 2x1          | 2x8, 2x4, 2x2, 2x1            | 0b0111                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 1x4 (Host 0 only)     | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 4C  | 2x8 Option A  | 1x16, 1x8, 1x4, 1x2, 1x1    | 1x16, 1x8, 1x4, 1x2, 1x1      | 0b0110                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 2x4 (Host 0 & 2 only) | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 4C  | 1x16 Option B | 2x8, 2x4, 2x2, 2x1          | 2x8, 2x4, 2x2, 2x1            | 0b0101                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 2x4 (Host 0 & 2 only) | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 4C  | 1x16 Option C | 4x4, 4x2, 4x1               | 4x4, 4x2, 4x1                 | 0b0100                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 4x4                   | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| 4C  | 4x4           | 4x4, 4x2, 4x1               | 4x4, 4x2, 4x1                 | 0b0011                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | 4x4                   | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| RSVD  | RSVD          | RSVD                        | RSVD                          | 0b0010                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | -                     | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| RSVD  | RSVD          | RSVD                        | RSVD                          | 0b0001                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | -                     | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |
| RSVD  | RSVD          | RSVD                        | RSVD                          | 0b0000                            | 4 Host | 4 Upstream Sockets | 4 Links        | 0b110      | -                     | Lk0, Ln0  | Lk0, Ln2 | Lk0, Ln3 |          |     |     |     |     |     |     |      |      |      |      |      |      |

Table 41: Bifurcation for Quad Host, Quad Sockets and Quad Upstream Links – First 8 lanes  
(BIF[2:0]#=0b111)

| Quad Host, Four Upstream Sockets, Four Upstream Links, First 8 PCIe lanes |               |                                    |                                    |        |                    |                |            |                       |          | Key: Cells shown as Link/Lane (e.g. Lk0/Ln0), HD = Host Disabled Lane |          |          |          |          |          |          |      |      |       |       |       |       |       |       |    |
|---|---------------|------------------------------------|------------------------------------|--------|--------------------|----------------|------------|-----------------------|----------|---|----------|----------|----------|----------|----------|----------|------|------|-------|-------|-------|-------|-------|-------|----|
| Min Card Width  | Card Name     | Card Short Name                    | Supported Bifurcation Modes        | Host   | Upstream Devices   | Upstream Links | BIF [2:0]# | Resulting Link        | Ln 0     | Ln 1  | Ln 2     | Ln 3     | Ln 4     | Ln 5     | Ln 6     | Ln 7     | Ln 8 | Ln 9 | Ln 10 | Ln 11 | Ln 12 | Ln 13 | Ln 14 | Ln 15 |    |
| n/a   | Not Present   | Card Not Present                   | Card Not Present                   | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1111     | -                     | Lk0, Ln0 |   |          |          |          |          |          |          |      |      |       |       |       |       |       |       |    |
| 2C  | 1x8 Option A  | 1x8, 1x4, 1x2, 1x1                 | 1x8, 1x4, 1x2, 1x1                 | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1110     | 1x2 (Host 0 only)     | Lk0, Ln0 |   |          |          |          |          |          |          |      |      |       |       |       |       |       |       |    |
| 2C  | 1x4           | 1x4, 1x2, 1x1                      | 1x4, 1x2, 1x1                      | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1110     | 1x2 (Host 0 only)     | Lk0, Ln0 |   |          |          |          |          |          |          |      |      |       |       |       |       |       |       |    |
| 2C  | 1x2           | 1x2, 1x1                           | 1x2, 1x1                           | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1110     | 1x2 (Host 0 only)     | Lk0, Ln0 |   |          |          |          |          |          |          |      |      |       |       |       |       |       |       |    |
| 2C  | 1x1           | 1x1                                | 1x1                                | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1110     | 1x1 (Host 0 only)     | Lk0, Ln0 |   |          |          |          |          |          |          |      |      |       |       |       |       |       |       |    |
| 2C  | 1x8 Option B  | 1x8, 1x4, 1x2, 1x1                 | 1x8, 1x4, 1x2, 1x1                 | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1101     | 2x2 (Host 0 & 2 only) | Lk0, Ln0 | HD  | HD       | HD       | Lk2, Ln0 | Lk2, Ln1 | HD       | HD       | HD   | HD   | HD    | HD    | HD    | HD    | HD    | HD    | HD |
| 4C  | 2x8 Option B  | 2x8, 2x4, 2x2, 2x1                 | 2x8, 2x4, 2x2, 2x1                 | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1101     | 2x2 (Host 0 & 2 only) | Lk0, Ln0 | HD  | HD       | HD       | Lk2, Ln0 | Lk2, Ln1 | HD       | HD       | HD   | HD   | HD    | HD    | HD    | HD    | HD    | HD    | HD |
| 4C  | 2x8 Option C  | 4x4, 4x2, 4x1                      | 4x4, 4x2, 4x1                      | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1100     | 4x2                   | Lk0, Ln0 | Lk1, Ln0  | Lk1, Ln0 | Lk1, Ln0 | Lk2, Ln0 | Lk2, Ln1 | Lk3, Ln0 | Lk3, Ln1 |      |      |       |       |       |       |       |       |    |
| 2C  | 1x8 Option D  | 1x8, 1x4, 2x4, 2x2, 2x1            | 1x8, 1x4, 2x4, 2x2, 2x1            | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1100     | 4x2                   | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 | Lk1, Ln0 | Lk1, Ln0 | Lk1, Ln0 | Lk1, Ln0 |      |      |       |       |       |       |       |       |    |
| 4C  | 1x16 Option D | 1x16, 1x8, 1x4, 2x8, 2x4, 2x2, 2x1 | 1x16, 1x8, 1x4, 2x8, 2x4, 2x2, 2x1 | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1010     | 4x2                   | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 | Lk1, Ln0 | Lk1, Ln0 | Lk1, Ln0 | Lk1, Ln0 |      |      |       |       |       |       |       |       |    |
| 2C  | 2x4           | 2x4, 2x2, 2x1                      | 2x4, 2x2, 2x1                      | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1011     | -                     | Lk0, Ln0 | Lk1, Ln0  | Lk1, Ln0 | Lk1, Ln0 | Lk1, Ln0 | Lk1, Ln0 | Lk1, Ln0 | Lk1, Ln0 |      |      |       |       |       |       |       |       |    |
| 2C  | 4x2           | 4x2 (First 8 lanes), 4x1           | 4x2 (First 8 lanes), 4x1           | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1001     | 4x2                   | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 | Lk1, Ln0 | Lk1, Ln0 | Lk1, Ln0 | Lk1, Ln0 |      |      |       |       |       |       |       |       |    |
| 2C  | RSVD          | RSVD                               | RSVD                               | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b1000     | -                     | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 |      |      |       |       |       |       |       |       |    |
| 4C  | 1x16 Option A | 1x16, 1x8, 1x4, 1x2, 1x1           | 1x16, 1x8, 1x4, 1x2, 1x1           | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b0111     | 1x2 (Host 0 only)     | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 |      |      |       |       |       |       |       |       |    |
| 4C  | 2x8 Option A  | 2x8, 2x4, 2x2, 2x1                 | 2x8, 2x4, 2x2, 2x1                 | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b0110     | 1x2 (Host 0 only)     | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 |      |      |       |       |       |       |       |       |    |
| 4C  | 1x16 Option B | 1x16, 1x8, 1x4, 1x2, 1x1           | 1x16, 1x8, 1x4, 1x2, 1x1           | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b0101     | 1x2 (Host 0 only)     | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 |      |      |       |       |       |       |       |       |    |
| 4C  | 1x16 Option C | 2x8, 2x4, 2x2, 2x1                 | 2x8, 2x4, 2x2, 2x1                 | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b0100     | 1x2 (Host 0 only)     | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 | Lk0, Ln0 |      |      |       |       |       |       |       |       |    |
| 4C  | 1x16 Option C | 4x4, 4x2, 4x1                      | 4x4, 4x2, 4x1                      | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b0100     | 2x2 (Host 0 & 2 only) | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 | Lk2, Ln0 | Lk2, Ln1 | Lk2, Ln0 | Lk2, Ln1 |      |      |       |       |       |       |       |       |    |
| 4C  | 4x4           | 4x4, 4x2, 4x1                      | 4x4, 4x2, 4x1                      | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b0011     | 1x2 (Host 0 & 2 only) | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 | HD       | HD       | HD       | HD       |      |      |       |       |       |       |       |       |    |
| RSVD  | RSVD          | RSVD                               | RSVD                               | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b0010     | -                     | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 |          |          |          |          |      |      |       |       |       |       |       |       |    |
| RSVD  | RSVD          | RSVD                               | RSVD                               | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b0001     | -                     | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 |          |          |          |          |      |      |       |       |       |       |       |       |    |
| RSVD  | RSVD          | RSVD                               | RSVD                               | 4 Host | 4 Upstream Sockets | 4 x2 Links     | 0b0000     | -                     | Lk0, Ln0 | Lk0, Ln0  | Lk0, Ln0 | Lk0, Ln0 |          |          |          |          |      |      |       |       |       |       |       |       |    |

### 3.8 Port Numbering and LED Implementations

The OCP NIC 3.0 I/O bracket shall provide port labeling for user identification.

LEDs shall be implemented on the OCP NIC 3.0 I/O bracket when there is sufficient space for local indication. LEDs are typically placed on the primary side. LEDs may be optionally implemented on the secondary side of the card for space constrained implementations. LEDs may be remotely implemented on the card Scan Chain (as defined in Section 3.4.5) for link/activity indication on the baseboard. LED configurations for the local and remote cases are described in the sections below. In all cases, the actual link rate may be directly queried through the management interface.

#### 3.8.1 OCP NIC 3.0 Port Naming and Port Numbering

The numbering of all OCP NIC 3.0 external ports shall start from Port 1. When oriented with the primary side components facing up and viewing directly into the port, Port 1 shall be located on the left hand side. The port numbers shall sequentially increase to the right. Refer to Figure 92 as an example implementation.

#### 3.8.2 OCP NIC 3.0 Card LED Configuration

For low I/O count small form-factor cards without built in light pipes (such as 1x QSFP, 2x QSFP, 2x SFP, or 2x RJ-45), or a large form-factor cards, where additional I/O bracket area is available, the card shall locally implement on-board link/activity indications. The card may additionally implement LEDs on the optional Scan Chain data stream.

For 4x SFP, a permissible LED implementation may include right angle SMT mount LEDs placed on the secondary side of the OCP NIC 3.0 card. The LEDs shall be located below the line side I/O cages.

Note: Depending on the end faceplate implementation (e.g. with an ejector latch), the secondary side LED implementation may be obstructed and biased to the left to prevent interference with the ejector cam mechanism.

The recommended local (on-card) LED implementation uses two physical LEDs (a bicolored Speed A/Speed B Link LED and a discrete Activity LED). Table 42 describes the OCP NIC 3.0 card LED implementations.

The LEDs shall be uniformly illuminated across the indicator surface. LED surfaces with a diffusion treatment are preferred. For ease of indication within the operating environment, all OCP NIC 3.0 cards shall implement measures to prevent bleed-through between LED indicators and its surrounding chassis components.

Table 42: OCP NIC 3.0 Card LED Configuration with Two Physical LEDs per Port

| LED Pin  | LED Color | Description   |
|----------|-----------|---|
| Link     | Green     | Active low. Bicolor multifunction LED.  |
|          | Amber     |   |
|          | Off       | <p>This LED shall be used to indicate link.</p> <p>When the link is up, then this LED shall be lit and solid. This indicates that the link is established, there are no local or remote faults, and the link is ready for data packet transmission/reception.</p> <p>The LED is Green when the port is linked at its maximum speed. The LED is Amber when the port is not linked at the highest speed. The LED is off when no link is present.</p> <p>For silicon with limited I/O, the Amber LED may be omitted. In this case, the Green LED shall simply indicate link is up at any configured speed.</p> <p>The illuminated Link LED indicator may be blinked and used for port identification through vendor specific link diagnostic software.</p> <p>The Link LED shall be located on the left hand side or located on the top for each port when the OCP NIC 3.0 card is viewed in the horizontal plane.</p> <p>For serviceability, green LEDs shall emit light at a wavelength between 513nm and 537nm while amber LEDs shall emit light at a wavelength between 580nm and 589nm.</p> <p>For uniformity across OCP NIC 3.0 products, all link LEDs shall have its luminance across the total surface area measured in millicandelas (mcd) with an average value between TBD mcd to TBD mcd.</p> |
| Activity | Green     | Active low.   |
|          | Off       | <p>When the link is up and there is no activity, this LED shall be lit and solid.</p> <p>When the link is up and there is link activity, then this LED should blink at the interval of 50-500ms during link activity.</p> <p>The activity LED shall be located on the right hand side or located on the bottom for each port when the OCP NIC 3.0 card is viewed in the horizontal plane.</p>   |

|  |  |  |
|--|--|--|
|  |  | <p>For serviceability, green LEDs shall emit light at a wavelength between 513nm and 537nm.</p> <p>For uniformity across OCP NIC 3.0 products, all activity LEDs shall have its luminance across the total surface area measured in millicandelas (mcd) with an average value between TBD mcd and TBD mcd.</p> |
|--|--|--|

### 3.8.3 OCP NIC 3.0 Card LED Ordering


For all OCP NIC 3.0 card use cases, each port shall implement the green/amber Link LED and a green activity LED. For I/O limited silicon, the amber LED may be omitted.

When the OCP NIC 3.0 card is viewed from the horizontal position, and with the primary component side facing up, the Link LED shall be located on the left side and the activity LED shall be located on the right. The LED placement may also make use of a stacked LED assembly, or light pipe in the vertical axis. In this case, the Link Activity LED shall be on the top of the stack, and the Activity LED shall be on the bottom of the stack when viewed from the horizontal position. In all cases, the port ordering shall increase from left to right when viewed from the same horizontal position.

The actual placement of the Link and Activity LEDs on the faceplate may be left up to the discretion of the OCP NIC 3.0 card designer. The LED port association shall be clearly labeled on the OCP NIC 3.0 card. Similarly, the LED for link and the LED for Activity indication shall also be marked on the faceplate.

For 4xSFP configurations, the LEDs may be placed on the secondary side of the card using right-angle SMT components. OCP NIC 3.0 designers may opt to use the scan chain LEDs instead or in addition to the on-card indicators.

Figure 92: Port and LED Ordering – Example SFF Link/Activity and Speed LED Placement

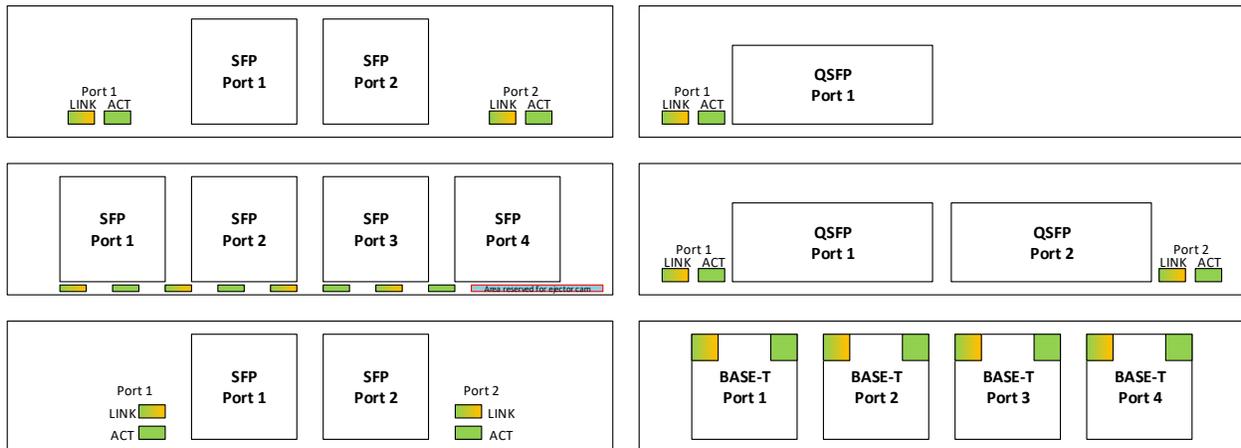

Note 1: The example port and LED ordering diagrams shown in Figure 92 are viewed with the card in the horizontal position and the primary side is facing up.

Note 2: The 4xSFP LED implementation is biased to the left to allow clearance for the ejector latch cam.

### 3.8.4 Baseboard LEDs Configuration over the Scan Chain

A small form-factor OCP NIC 3.0 with a fully populated I/O bracket (2x QSFP, 4x SFP or 4x RJ-45) does not have sufficient space for primary-side discrete on-board (faceplate) LED indicators. Section 3.8.2 presents an implementation for placing LEDs on the secondary side..

In this scenario, the line side link and activity LED indicators are implemented on the baseboard system via the Scan Chain for remote indication. The Scan Chain bit stream is defined in Section 3.4.5.

The baseboard LED implementation uses two discrete LEDs – a green/amber Link LED and a discrete green Activity. The physical baseboard LED implementation is left up to the baseboard vendor and is not defined in this specification. The LED implementation is optional for baseboards.

For serviceability, green LEDs shall emit light at a wavelength between 513nm and 537nm while amber LEDs shall emit light at a wavelength between 580nm and 589nm.

At the time of this writing, the Scan Chain definition allows for up to two link and one activity LED per port. A total of up to 8 ports are supported in the Scan Chain. The bit stream defines the LEDs to be active low (on). The Scan Chain LED implementation allows the NIC LED indicators to be remotely located on the OCP NIC 3.0 compliant chassis (e.g. front LED indicators with rear I/O cards).

### 3.9 Power Capacity and Power Delivery

There are four permissible power states: NIC Power Off, ID Mode, Aux Power Mode (S5), and Main Power Mode (S0). The transition of these states is shown in Figure 93. The max available power envelopes for each of these states are defined in Table 43.

Figure 93: Baseboard Power States

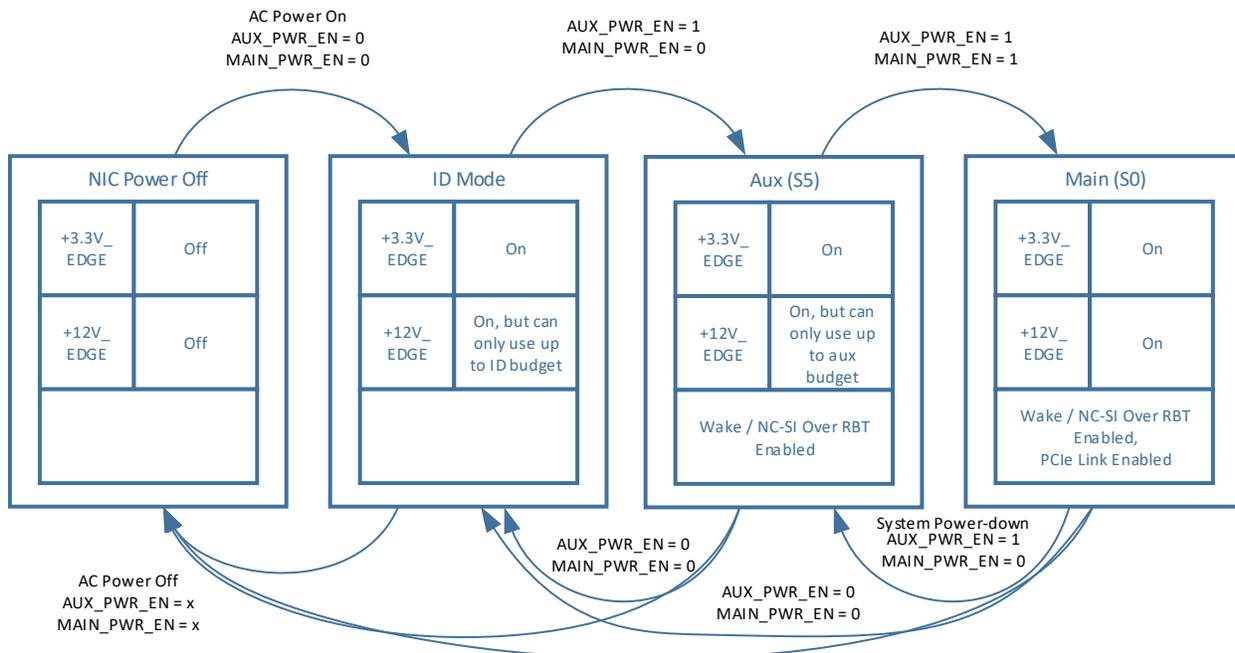


Table 43: Power States

| Power State          | AUX_PWR_EN | MAIN_PWR_EN | PERSTn | FRU | Scan Chain     | WAKEn | RBT Link | PCIe Link | +3.3V_EDGE | +12V_EDGE |
|----------------------|------------|-------------|--------|-----|----------------|-------|----------|-----------|------------|-----------|
| NIC Power Off        | Low        | Low         | Low    |     |                |       |          |           |            |           |
| ID Mode              | Low        | Low         | Low    | X   | X <sup>1</sup> |       |          |           | X          | X         |
| Aux Power Mode (S5)  | High       | Low         | Low    | X   | X              | X     | X        |           | X          | X         |
| Main Power Mode (S0) | High       | High        | High   | X   | X              | X     | X        | X         | X          | X         |

**Note 1:** Only the PRSNTB[0:3]# scan chain signals are valid in ID mode as the OCP NIC 3.0 card power rails have not yet been enabled via the AUX\_PWR\_EN/MAIN\_PWR\_EN signals.

### 3.9.1 NIC Power Off

In NIC power off mode, all power delivery has been turned off or disconnected from the baseboard. Transition to this state can be from any other state.

### 3.9.2 ID Mode

In the ID Mode, only +3.3V\_EDGE is available for powering up management only functions. Only FRU and scan chain accesses are allowed in this mode. Only the card PRSNTB[0:3]# bits are valid on the chain in this mode as the OCP NIC 3.0 card power rails have not yet been enabled via the AUX\_PWR\_EN and MAIN\_PWR\_EN signals. The WAKE#, TEMP\_WARN#, TEMP\_CRIT#, Link and Activity bits are invalid and should be masked by the baseboard in ID Mode.

The +12V\_EDGE rail is not intended to be used in ID Mode, however leakage current may be present. The max leakage is defined in Section 3.10. An OCP NIC 3.0 card shall transition to this mode when AUX\_PWR\_EN=0 and MAIN\_PWR\_EN=0.

### 3.9.3 Aux Power Mode (S5)

In Aux Power Mode provides both +3.3V\_EDGE as well as +12V\_EDGE is available. +12V\_EDGE in Aux mode may be used to deliver power to the OCP NIC 3.0 card, but only up to the Aux mode budget as defined in Table 44. An OCP NIC 3.0 card shall transition to this mode when AUX\_PWR\_EN=1, MAIN\_PWR\_EN=0, NIC\_PWR\_GOOD=1 and the duration ( $T_{APL}$ ) has passed for the ID-Aux Power Mode ramp. This guarantees the ID mode to Aux Power Mode transition (as shown in Figure 94) has completed and all Aux Power Mode rails are within operating tolerances. The WAKE#, TEMP\_WARN#, and TEMP\_CRIT# bits shall not sampled until these conditions are met.

### 3.9.4 Main Power Mode (S0)

In Main Power Mode provides both +3.3V\_EDGE and +12V\_EDGE across the OCP connector. The OCP NIC 3.0 card operates in full capacity. Up to 80W may be delivered on +12V\_EDGE for a SFF Card and up to 150W for a LFF Card. Additionally, up to 3.63W is delivered on each +3.3V\_EDGE pin. An OCP NIC 3.0 card shall transition to this mode when AUX\_PWR\_EN=1, MAIN\_PWR\_EN=1, NIC\_PWR\_GOOD=1 and the duration ( $T_{MPL}$ ) has passed for the Aux-Main Power Mode ramp. This guarantees the Aux Power Mode to Main Power Mode transition (as shown in Figure 94) has completed and all Main Power Mode rails are within operating tolerances. The WAKE#, TEMP\_WARN#, and TEMP\_CRIT# bits shall not sampled until these conditions are met.

### 3.10 Power Supply Rail Requirements and Slot Power Envelopes

The baseboard provides +3.3V\_EDGE and +12V\_EDGE to both the Primary and Secondary Connectors. The rail requirements are leveraged from the PCIe CEM 4.0 specification. For OCP NIC 3.0 cards, the requirements are as follows:

Table 44: Baseboard Power Supply Rail Requirements – Slot Power Envelopes

| Power Rail            | 15W Slot<br>SFF<br>Hot Aisle | 25W Slot<br>SFF<br>Hot Aisle | 35W Slot<br>SFF<br>Hot Aisle | 80W Slot<br>SFF<br>Cold Aisle | 150W<br>LFF<br>Cold Aisle |
|-----------------------|------------------------------|------------------------------|------------------------------|-------------------------------|---------------------------|
| <b>+3.3V_EDGE</b>     |                              |                              |                              |                               |                           |
| Voltage Tolerance     | ±9% (max)                    | ±9% (max)                    | ±9% (max)                    | ±9% (max)                     | ±9% (max)                 |
| <b>Supply Current</b> |                              |                              |                              |                               |                           |
| ID Mode               | 100mA (max)                  | 100mA (max)                  | 100mA (max)                  | 100mA (max)                   | 100mA (max)               |
| Aux Mode              | 1.1A (max)                   | 1.1A (max)                   | 1.1A (max)                   | 1.1A (max)                    | 2.2A (max)                |
| Main Mode             | 1.1A (max)                   | 1.1A (max)                   | 1.1A (max)                   | 1.1A (max)                    | 2.2A (max)                |
| Capacitive Load       | 150µF (max)                  | 150µF (max)                  | 150µF (max)                  | 150µF (max)                   | 300µF (max)               |
| <b>+12V_EDGE</b>      |                              |                              |                              |                               |                           |
| Voltage Tolerance     | +8%/-12% (max)               | +8%/-12% (max)               | +8%/-12% (max)               | +8%/-12% (max)                | +8%/-12% (max)            |
| <b>Supply Current</b> |                              |                              |                              |                               |                           |
| ID Mode               | 50mA (max)                   | 50mA (max)                   | 50mA (max)                   | 50mA (max)                    | 50mA (max)                |
| Aux Mode              | 0.7A (max)                   | 1.1A (max)                   | 1.5A (max)                   | 3.3A (max)                    | 6.3A (max)                |
| Main Mode             | 1.25A (max)                  | 2.1A (max)                   | 2.9A (max)                   | 6.6A (max)                    | 12.5A (max)               |
| Capacitive Load       | 500µF (max)                  | 500µF (max)                  | 500µF (max)                  | 500µF (max)                   | 1000µF (max)              |

**Note 1:** While cards may draw up to the published power ratings, the baseboard vendor shall evaluate its cooling capacity for each slot power envelope to determine if a transition to Aux Power Mode is allowed.

**Note 2:** The maximum slew rate for each OCP NIC 3.0 card shall be no more than 0.1A/µs per the PCIe CEM specification.

**Note 3:** Each OCP NIC 3.0 card shall limit the bulk capacitance to the max values published (500µF for a Small Form-Factor card, 1000µF for a Large Form-Factor card).

**Note 4:** For systems that implement hot plug, the baseboard shall limit the voltage slew rate such that the instantaneous inrush current shall not exceed the specified max current. The equation is defined in the PCIe CEM specification and is  $dV/dt = I/C$ ; where:

$I$  = max allowed current (A)

$C$  = max allowed bulk capacitance (F)

$dV/dt$  = maximum allowed voltage slew rate (V/s)

The OCP NIC 3.0 FRU definition provides a record for the max power consumption of the card. This value shall be used to aid in determining if the card may be enabled in a given OCP slot. Refer to Section 4.10.2 for the available FRU records.

Additionally, the baseboard shall advertise its slot power limits to aid in the overall board power budget allocation to prevent a high power card from being enabled in a lower power class slot. This is

implemented via the Slot Power Limit Control mechanism as defined in the PCIe Base Specification. The end point silicon will power up in a low power state until power is negotiated.

### 3.11 Hot Swap Considerations for +12V\_EDGE and +3.3V\_EDGE Rails

Hot plug and hot swap support is optional for baseboard implementers. However, the OCP NIC 3.0 form factor lends itself to potential hot plug and removal events while the baseboard is powered on. These events need to be carefully orchestrated with the system operating system and management entity to prevent a system hang. A surprise extraction may occur in some instances when resources have not been quiesced and the card is removed. Many aspects of the system are involved in processing such an event in both cases. The current scope of this specification does not define an overall hardware or software system architecture to support hot plug. Instead, this specification only highlights the hardware elements that can be utilized to support hot plug for implementations.

The system implementer shall consider the use of hotswap controllers on both the +12V\_EDGE and +3.3V\_EDGE pins to prevent damage to the baseboard or the OCP NIC 3.0 card. Hotswap controllers help with in-rush current limiting while also providing overcurrent protection, undervoltage and overvoltage protection capabilities.

The hot swap controller may gate the +12V\_EDGE and +3.3V\_EDGE based on the PRSNTB[3:0]# value. Per Section 3.5.3, a card is present in the system when the encoded value is not 0b1111. The PRSNTB[3:0]# may be AND'ed together and connected to the hotswap controller to accomplish this result. Per the OCP NIC 3.0 mechanical definition (Section 3.1.1), the present pins are short pins and engage only when the card is positively seated.

The PRSNTB[3:0]# pins are used to detect an OCP 3.0 NIC card insertion and removal event. The card type detection is described in Section 3.5. Through the use of in-band signaling, the PCIe link may be enabled to periodically train when a card is plugged in. Similarly, the signals may be used to detect a card removal. The card type is determined by querying the FRU data over the SMBus.

At the time of this writing, the DSP0222 Network Controller Sideband Interface (NC-SI) Specification does not define a mechanism to discover hot-plug support. Future work is needed for supporting this feature on NCSI over RBT interfaces.

Baseboards that do not support hot insertion, or hot extractions may opt to not implement these features.

### 3.12 Power Sequence Timing Requirements

The following figure shows the power sequence of PRSNTB[3:0]#, +3.3V\_EDGE, +12V\_EDGE relative to AUX\_PWR\_EN, BIF[2:0]#, MAIN\_PWR\_EN, PERSTn\*, and PCIe REFCLK stable on the baseboard. Additionally the OCP NIC 3.0 card power ramp, and NIC\_PWR\_GOOD are shown. Please refer to Section 3.4.6 for the NIC\_PWR\_GOOD definition. Refer to DMTF DSP0222 for details on the NC-SI clock startup requirements.

Figure 94: Power-Up Sequencing


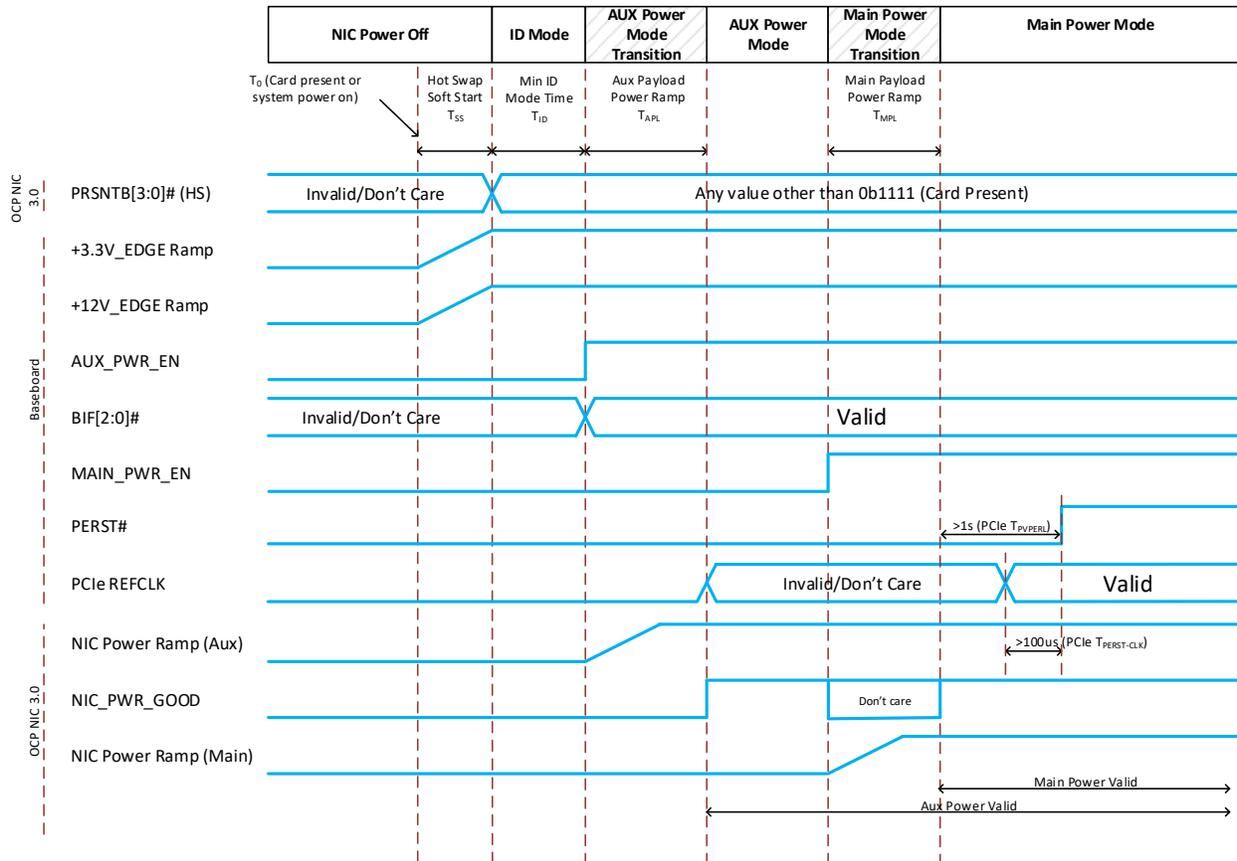


Figure 95: Power-Down Sequencing

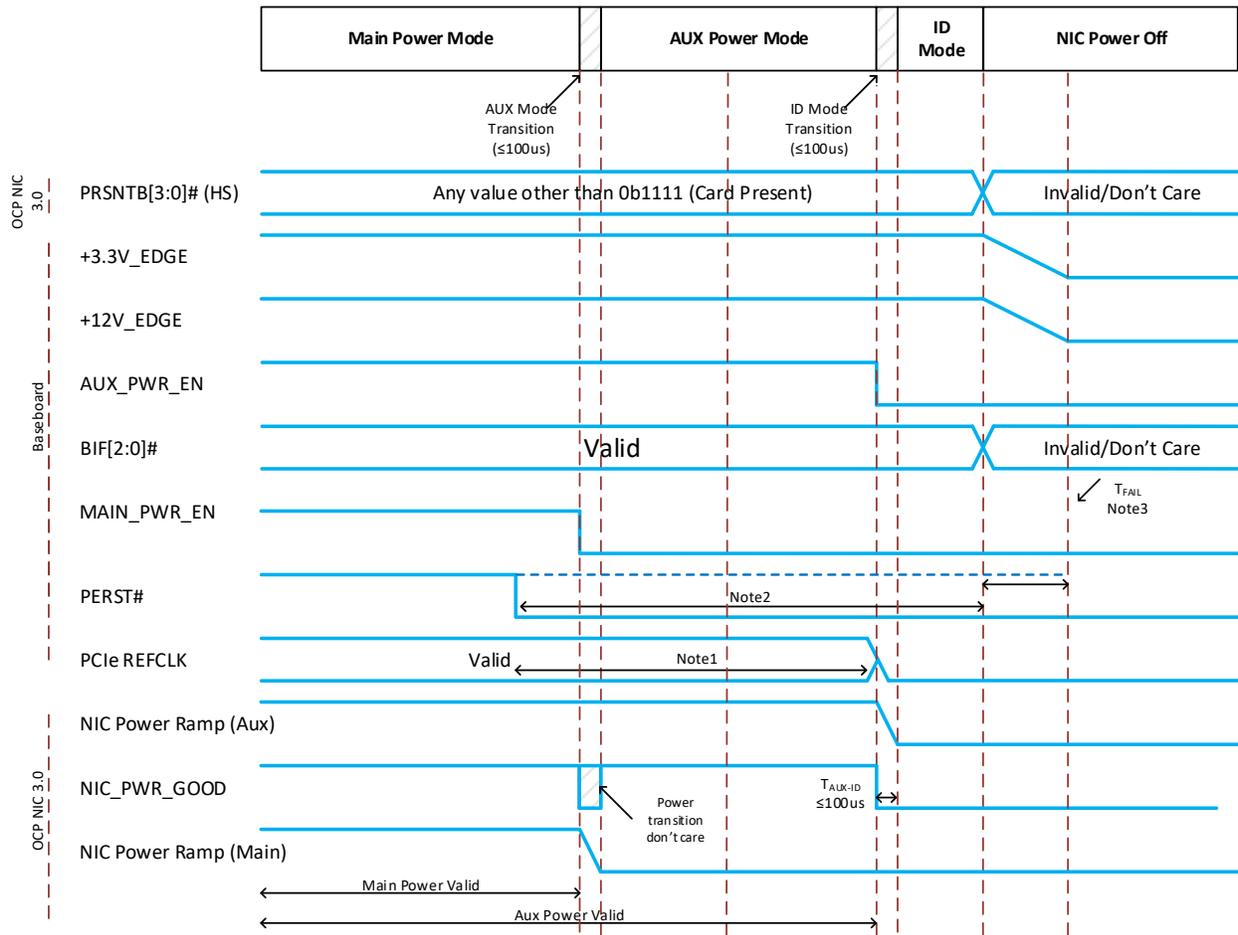

Note1: REFCLK go inactive after PERST# goes active. (PCIe CEM Section 2.2.3)  
 Note2: PERST# goes active before the power on the connector is removed. (PCIe CEM Section 2.2.3)  
 Note3: In the case of a surprise power down, PERST# goes active  $T_{FAIL}$  after power is no longer stable.

Table 45: Power Sequencing Parameters

| Parameter | Value | Units | Description   |
|-----------|-------|-------|---|
| $T_{SS}$  | 20    | ms    | Maximum time between system +3.3V_EDGE and +12V_EDGE ramp to power stable.<br><br>This parameter is only applicable to hot swap controller based implementations. For non-hot swap applications, the +3.3V_EDGE and +12V_EDGE ramp is system dependent. |
| $T_{ID}$  | 20    | ms    | Minimum guaranteed time per spec to spend in ID mode.   |
| $T_{APL}$ | 25    | ms    | Maximum time between AUX_PWR_EN assertion to NIC_PWR_GOOD assertion.  |
| $T_{MPL}$ | 25    | ms    | Maximum time between MAIN_PWR_EN assertion to NIC_PWR_GOOD assertion.   |

|                        |     |    |   |
|------------------------|-----|----|---|
| T <sub>PVPERL</sub>    | 1   | s  | Minimum time between NIC_PWR_GOOD assertion in Main Power Mode and PERST# deassertion. For OCP NIC 3.0 applications, this value is >1 second. This is longer than the minimum value specified in the PCIe CEM Specification, Rev 4.0. |
| T <sub>PERST-CLK</sub> | 100 | μs | Minimum Time PCIe REFCLK is stable before PERST# inactive   |
| T <sub>FAIL</sub>      | 500 | ns | In the case of a surprise power down, PERST# goes active at minimum T <sub>FAIL</sub> after power is no longer stable.  |
| T <sub>AUX-ID</sub>    | 10  | ms | Maximum time from AUX_PWR_EN deassertion to NIC_PWR_GOOD deassertion.   |

### 3.13 Digital I/O Specifications

All digital I/O pins on the connector boundary are +3.3V signaling levels. Table 46 following tables provide the absolute max levels. Refer to the appropriate specifications for the RBT, PCIe and SMBus DC/AC specifications.

Table 46: Digital I/O DC specifications

| Symbol          | Parameter           | Min | Max | Units | Note |
|-----------------|---------------------|-----|-----|-------|------|
| V <sub>OH</sub> | Output voltage      |     | 3.6 | V     |      |
| V <sub>OL</sub> | Output low voltage  |     | 0.8 | V     |      |
| I <sub>OH</sub> | Output high current |     |     | mA    |      |
| I <sub>OH</sub> | Output low current  |     |     | mA    |      |
| V <sub>IH</sub> | Input voltage       |     | 3.6 | V     |      |
| V <sub>IL</sub> | Input low voltage   |     | 0.8 | V     |      |
| I <sub>OH</sub> | Input current       |     |     | mA    |      |

Table 47: Digital I/O AC specifications

| Symbol          | Parameter        | Min | Max | Units | Note |
|-----------------|------------------|-----|-----|-------|------|
| T <sub>OR</sub> | Output rise time |     |     | ns    |      |
| T <sub>OF</sub> | Output fall time |     |     | ns    |      |

## 4 Management and Pre-OS Requirements

OCP NIC 3.0 card management is an important aspect to overall system management. This section specifies a common set of management requirements for OCP NIC 3.0 implementations. There are three types of implementations (RBT+MCTP Type, RBT Type, and MCTP Type) depending on the physical sideband management interfaces, transports, and traffic supported over different transports. An OCP NIC 3.0 implementation shall support at least one type of implementation for card management. For a given type of implementation, an OCP NIC 3.0 card shall support type specific requirements described in Sections 4.1 through 4.7.

Table 48: OCP NIC 3.0 Management Implementation Definitions

| Management Type | Definition  |
|-----------------|---|
| RBT Type        | The RBT Type management interface is exclusive to the Reduced Media Independent Interface (RMII) Based Transport (RBT). The NIC card is required to support the DSP0222 Network Controller Sideband Interface (NC-SI) Specification for this management   |
| RBT+MCTP Type   | The RBT+MCTP management interface supports both the RBT and MCTP standards, specifically the DSP0222 Network Controller Sideband Interface (NC-SI) Specification, DSP0236 Management Component Transport Protocol (MCTP) Base Specification, and the associated binding specifications. This is the preferred management implementation for baseboard NIC cards. See MCTP Type below for more details |
| MCTP Type       | The MCTP management interface supports MCTP standards specifically the DSP0236 Management Component Transport Protocol (MCTP) Base Specification and the associated binding specifications.   |

### 4.1 Sideband Management Interface and Transport

OCP NIC 3.0 sideband management interfaces are used by a Management Controller (MC) or Baseboard Management Controller (BMC) to communicate with the NIC. Table 49 summarizes the sideband management interface and transport requirements.

Table 49: Sideband Management Interface and Transport Requirements

| Requirement  | RBT+MCTP Type | RBT Type | MCTP Type |
|--|---------------|----------|-----------|
| NC-SI 1.1 compliant RMII Based Transport (RBT) including physical interface defined in Section 10 of DMTF DSP0222                  | Required      | Required | N/A       |
| I <sup>2</sup> C compliant physical interface for FRU EEPROM   | Required      | Required | Required  |
| SMBus 2.0 compliant physical interface   | Required      | N/A      | Required  |
| Management Component Transport Protocol (MCTP) Base 1.3 (DSP0236 1.3 compliant) over MCTP/SMBus Binding (DSP0237 1.1 compliant)    | Required      | N/A      | Required  |
| PCIe VDM compliant physical interface  | Optional      | Optional | Optional  |
| Management Component Transport Protocol (MCTP) Base 1.3 (DSP0236 1.3 compliant) over MCTP/PCIe VDM Binding (DSP0238 1.0 compliant) | Optional      | Optional | Optional  |

## 4.2 NC-SI Traffic

DMTF DSP0222 defines two types of NC-SI traffic: Pass-Through and Control. Table 50 summarizes the NC-SI traffic requirements.

Table 50: NC-SI Traffic Requirements

| Requirement  | RBT+MCTP Type | RBT Type | MCTP Type |
|--|---------------|----------|-----------|
| NC-SI Control over RBT (DMTF DSP0222 1.1 or later compliant) | Required      | Required | N/A       |
| NC-SI Control over MCTP (DMTF DSP0261 1.2 compliant)         | Required      | N/A      | Required  |
| NC-SI Pass-Through over RBT (DMTF DSP0222 1.1 compliant)     | Required      | Required | N/A       |
| NC-SI Pass-Through over MCTP (DMTF DSP0261 1.2 compliant)    | Optional      | N/A      | Optional  |

Note: A Management Controller (MC) is allowed to use NC-SI Control traffic only without enabling NC-SI pass-through.

## 4.3 Management Controller (MC) MAC Address Provisioning

An OCP NIC 3.0 compliant card that supports NC-SI pass-through shall provision one or more MAC addresses per Package (refer to the Package definition as detailed in the DMTF DSP0222 specification) for Out-Of-Band (OOB) management traffic. The number of MC MAC addresses provisioned is implementation dependent. These MAC addresses are not exposed to the host(s) as available MAC addresses. The MC is not required to use these provisioned MAC addresses. Table 51 summarizes the MC MAC address provisioning requirements.

Table 51: MC MAC Address Provisioning Requirements

| Requirement  | RBT+MCTP Type | RBT Type | MCTP Type |
|--|---------------|----------|-----------|
| <p>One or more MAC Addresses per package shall be provisioned for the MC.</p> <p>The OCP NIC 3.0 platform may choose to use the NIC vendor allocated MAC addresses for the BMC.</p> <p>The usage of provisioned MAC addresses are BMC implementation specific and is outside the scope of this specification.</p> <p>The recommended MAC address allocation scheme is stated below.</p> <p>Assumptions:</p> <ol style="list-style-type: none"> <li>1. The number of BMCs or virtual BMCs is the same as the number of hosts (1:1 relationship between each host and the BMC).</li> </ol> | Required      | Required | Optional  |

|  |          |          |          |
|--|----------|----------|----------|
| <p>2. The maximum number of partitions on each port is the same.</p> <p>Variables:</p> <ul style="list-style-type: none"> <li>• <code>num_ports</code> – Number of Ports on the OCP NIC 3.0 card</li> <li>• <code>max_parts</code> – Maximum number of partitions on a port</li> <li>• <code>num_hosts</code> – Number of hosts supported by the NIC</li> <li>• <code>first_addr</code> – The MAC address of the first port on the first host for the first partition on that port</li> <li>• <code>host_addr[i]</code> – base MAC address of <math>i^{\text{th}}</math> host (<math>0 \leq i \leq \text{num\_hosts}-1</math>)</li> <li>• <code>bmc_addr[i]</code> – base MAC address of <math>i^{\text{th}}</math> BMC (<math>0 \leq i \leq \text{num\_hosts}-1</math>)</li> </ul> <p>Formulae:</p> <ul style="list-style-type: none"> <li>• <math>\text{host\_addr}[i] = \text{first\_addr} + i * \text{num\_ports} * (\text{max\_parts} + 1)</math></li> <li>• The assignment of MAC address used by <math>i^{\text{th}}</math> host on port <math>j</math> for the partition <math>k</math> is out of the scope of this specification.</li> <li>• <math>\text{bmc\_addr}[i] = \text{host\_addr}[i] + \text{num\_ports} * \text{max\_parts}</math></li> <li>• The MAC address used by <math>i^{\text{th}}</math> BMC on port <math>j</math>, where <math>0 \leq i \leq \text{num\_hosts}-1</math> and <math>0 \leq j \leq \text{num\_ports} - 1</math> is <math>\text{bmc\_addr}[i] + j</math></li> </ul> |          |          |          |
| <p>Support at least one of the following mechanism for provisioned MC MAC Address retrieval:</p> <ul style="list-style-type: none"> <li>• NC-SI Control/RBT (DMTF DSP0222 1.1 or later compliant)</li> <li>• NC-SI Control/MCTP (DMTF DSP0261 1.2 compliant)</li> </ul> <p>Note: This capability is planned to be included in revision 1.2 of the DSP0222 NC-SI specification.</p> <p>For DMTF DSP0222 1.1 compliant OCP NIC 3.0 implementations, MC MAC address retrieval shall be supported using NC-SI OEM commands. An OCP NIC 3.0 implementation, that is compliant with DMTF DSP0222 that defines standard NC-SI commands for MC MAC address retrieval, shall support those NC-SI commands.</p>  | Required | Required | Optional |

#### 4.4 Temperature Reporting

An OCP NIC 3.0 implementation can have several silicon components including one or more ASICs implementing NIC functions and one or more transceiver modules providing physical network media connectivity. For the system management, it is important that temperatures of these components can be retrieved over sideband interfaces.

The temperature reporting interface shall be accessible in Aux Power Mode (S5), and Main Power Mode (S0). Table 52 summarizes temperature reporting requirements. These requirements improve the system thermal management and allow the baseboard management device to access key component temperatures on an OCP NIC 3.0 card. When the temperature reporting function is implemented, it is required that the temperature reporting accuracy is within  $\pm 3^{\circ}\text{C}$ .

Table 52: Temperature Reporting Requirements

| Requirement  | RBT+MCTP Type | RBT Type    | MCTP Type   |
|--|---------------|-------------|-------------|
| Component Temperature Reporting for a component with TDP $\geq 8\text{W}$  | Required      | Required    | Required    |
| Component Temperature Reporting for a component with TDP $< 8\text{W}$   | Recommended   | Recommended | Recommended |
| When the temperature sensor reporting function is implemented, the OCP NIC 3.0 card shall support PLDM for Platform Monitoring and Control (DSP0248 1.1 compliant) for temperature reporting.  | Required      | Required    | Required    |
| When the temperature sensor reporting function is implemented, the OCP NIC 3.0 card shall report upper-warning, upper-critical, and upper-fatal thresholds for PLDM numeric sensors.<br><br>Note: For definitions of the warning, critical, and fatal thresholds, refer to DSP0248 1.1.  | Required      | Required    | Required    |
| When the temperature reporting function is implemented using PLDM numeric sensors, the temperature tolerance shall be reported.  | Required      | Required    | Required    |
| Support for NIC self-shutdown.<br><br>The purpose of this feature is to “self-protect” the NIC from permanent damage due to high operating temperature experienced by the NIC. The NIC can accomplish this by reducing the power consumed by the device.<br><br>The NIC shall monitor its temperature and shut-down itself as soon as the threshold value is reached. The value of the self-shutdown threshold is implementation specific. It is recommended that the self-shutdown threshold value is higher than the maximum junction temperature of the ASIC implementing the NIC function and this value is between the critical and fatal temperature thresholds. The self-shutdown | Optional      | Optional    | Optional    |

|   |  |  |  |
|---|--|--|--|
| <p>feature is a final effort in preventing permanent card damage at the expense of potential data loss.</p> <p>If this feature is implemented, care shall be taken to ensure that the board power down state is latched and that the board does not autonomously resume normal operation.</p> <p>Note: It is assumed that a system management function will prevent a component from reaching its fatal threshold temperature.</p> <p>The OCP NIC 3.0 card does not need to know the reason for the self-shutdown threshold crossing (e.g. fan failure). After entering the self-shutdown state, the OCP NIC 3.0 card is not required to be operational. This might cause the system with the OCP NIC 3.0 card to become unreachable via the NIC.</p> <p>In order to recover the NIC from the self-shutdown state, the OCP NIC 3.0 card shall go through the NIC ID Mode state as described in Section 3.9.1.</p> |  |  |  |
|---|--|--|--|

#### 4.5 Power Consumption Reporting

An OCP NIC 3.0 implementation may be able to report the power consumed at the board level. It is important for the system management that the information about the power consumption can be retrieved over sideband interfaces. Table 53 summarizes power consumption reporting requirements.

Table 53: Power Consumption Reporting Requirements

| Requirement  | RBT+MCTP Type | RBT Type | MCTP Type |
|--|---------------|----------|-----------|
| Board Only Estimated Power Consumption Reporting. The value of this field is encoded into the FRU EEPROM contents. This field reports the board max power consumption value without transceivers plugged into the line side receptacles. | Required      | Required | Required  |
| Pluggable Transceiver Module Power Reporting. The pluggable transceivers plugged into the line side receptacles shall be inventoried (via an EEPROM query) and the total module power consumption is reported.                           | Required      | Required | Required  |
| Board Runtime Power Consumption Reporting. This value shall be optionally reported over the management binding interface. The runtime power value shall report the card edge power.  | Optional      | Optional | Optional  |
| PLDM for Platform Monitoring and Control (DSP0248 1.1 compliant) for component power consumption reporting   | Required      | Required | Required  |

## 4.6 Pluggable Transceiver Module Status and Temperature Reporting

A pluggable transceiver module is a compact, hot-pluggable transceiver used to connect the OCP 3.0 NIC to an external physical medium. It is important for proper system operation to know the presence and temperature of pluggable transceiver modules. Table 54 summarizes pluggable module status reporting requirements.

Table 54: Pluggable Module Status Reporting Requirements

| Requirement  | RBT+MCTP Type | RBT Type | MCTP Type |
|--|---------------|----------|-----------|
| Pluggable Transceiver modules Presence Status and Temperature Reporting  | Required      | Required | Required  |
| PLDM for Platform Monitoring and Control (DSP0248 1.1 compliant) for reporting the pluggable transceiver module presence status and pluggable transceiver module temperature | Required      | Required | Required  |

## 4.7 Management and Pre-OS Firmware Inventory and Update

An OCP NIC 3.0 implementation can have different types of firmware components for data path, control path, and management path operations. It is desirable that OCP NIC 3.0 implementations support an OS-independent mechanism for the management firmware update. It is desirable that the management firmware update does not require a system reboot for the new firmware image to become active. Table 55 summarizes the firmware inventory and update requirements.

Table 55: Management and Pre-OS Firmware Inventory and Update Requirements

| Requirement   | RBT+MCTP Type | RBT Type    | MCTP Type |
|---|---------------|-------------|-----------|
| Network boot in UEFI driver (supporting both IPv4 and IPv6 addressing for network boot) | Required      | Required    | Required  |
| UEFI secure boot for UEFI drivers   | Required      | Required    | Required  |
| UEFI Firmware Management Protocol (FMP)   | Required      | Required    | Required  |
| PLDM for Firmware Update (DSP0267 1.0 compliant)  | Required      | Recommended | Required  |

### 4.7.1 Secure Firmware

It is highly recommended that an OCP NIC 3.0 card supports a secure firmware feature. In the future versions of the OCP NIC 3.0 specification, the secure firmware feature is intended to be required. When the secure firmware feature is enabled and where export compliance permits, the OCP NIC 3.0 card shall verify firmware components prior to the execution, execute only signed and verified firmware components, and only allow authenticated firmware updates. Where applicable, an OCP NIC 3.0 implementation shall use the guidelines provided in NIST SP 800-193 (draft) Platform Resiliency Guidelines for the following secure firmware functions:

- Signed Firmware Updates
- Ensure only valid/authenticated firmware updates can be applied. Refer to: NIST 800-193 Section 3.5 Firmware Update Mechanisms, and 4.1.2 Root of Trust for Update (RTU) and Chain of Trust for Update (CTU)

- Ensure authentication mechanisms cannot be bypassed. Refer to NIST 800-193 Section 4.2 Protection.
- Secure Boot
- Only boot trusted/authenticated firmware: NIST 800-193 4.1.3 Root of Trust for Detection (RTD) and Chain of Trust for Detection (CTD), and Section 4.3 Detection
- Recovery mechanism in case of boot failure: NIST 800-193 Section 4.4 Recovery

#### 4.7.2 Firmware Inventory

The OCP NIC 3.0 card shall allow queries to obtain the firmware component versions, device model, and device ID via in-band and out-of-band interfaces without impacting NIC function and performance of said paths.

#### 4.7.3 Firmware Inventory and Update in Multi-Host Environments

A multi-host capable OCP NIC 3.0 card shall gracefully handle concurrent in-band queries from multiple hosts and out-of-band access from the BMC for firmware component versions, device model, and device ID information.

A multi-host capable OCP NIC 3.0 card shall only permit one entity to perform write accesses to NIC firmware at a time, without creating contention.

A multi-host capable OCP NIC 3.0 card shall gracefully handle exceptions when more than one entity attempts to perform concurrent NIC firmware writes.

### 4.8 NC-SI Package Addressing and Hardware Arbitration Requirements

NC-SI over RBT is implemented via RMII pins between the MC and the OCP NIC 3.0 card. Protocol and implementation details of NC-SI over RBT can be found in the DMTF DSP0222 standard.

#### 4.8.1 NC-SI over RBT Package Addressing

NC-SI over RBT capable OCP NIC 3.0 cards shall use a unique Package ID per ASIC when multiple ASICs share the single NC-SI physical interconnect to ensure there are no addressing conflicts.

Baseboards use the Slot\_ID[1:0] values on the Primary Connector for this identification. The value of Slot\_ID[1:0] is determined by the encoding shown in Table 56. SLOT\_ID[1:0] is statically set high or low on the baseboard and is available on the OCP Bay portion of the Primary Connector.

Table 56: Slot\_ID[1:0] to Package ID[2:0] Mapping

| Physical Slot (Dec.) | SLOT_ID[1:0] |            | Package ID[2:0] |               |               |
|----------------------|--------------|------------|-----------------|---------------|---------------|
|                      | Pin OCP_A6   | Pin OCP_B7 | Package ID[2]   | Package ID[1] | Package ID[0] |
|                      | SLOT_ID1     | SLOT_ID0   | PhysDev#        | SLOT_ID1      | SLOT_ID0      |
| Slot 0               | 0            | 0          | 0/1             | 0             | 0             |
| Slot 1               | 0            | 1          | 0/1             | 0             | 1             |
| Slot 2               | 1            | 0          | 0/1             | 1             | 0             |
| Slot 3               | 1            | 1          | 0/1             | 1             | 1             |

Package ID[2:0] is a 3-bit field and is encoded in the NC-SI Channel ID as bits [7:5]. SLOT\_ID1 is associated with Package ID[1]. SLOT\_ID0 is associated with Package ID[0]. The Package ID[2] value is based on the silicon instance on the same physical OCP NIC 3.0 card. Package ID[2]==0b0 is assigned for

physical controller #0. Package ID[2]==0b1 is assigned for physical controller #1. In this case, physical controller #1 on the same card is at an address offset of +0x4. Refer to the specific endpoint device datasheet for details on the Package ID configuration options.

Note: The Package ID[2] field is optionally configurable in the NC-SI specification. If the target silicon hard codes this bit to 0b0, then a card must only implement a single silicon instance to prevent addressing conflicts.

Refer to the DMTF DSP0222 standard for more information on package addressing and Package ID.

#### 4.8.2 Arbitration Ring Connections

For baseboards that implement two or more Primary Connectors, the NC-SI over RBT arbitration ring shall be connected to each other. The arbitration ring shall support operation with one card, or multiple cards installed. Figure 78 shows an example connection with dual Primary Connectors.

### 4.9 SMBus 2.0 Addressing Requirements

The SMBus provides a low speed management bus for the OCP NIC 3.0 card. The FRU EEPROM is directly connected to the OCP NIC 3.0 card edge on this bus and can be read by the baseboard in the ID Mode, Aux Power Mode and Main Power Mode. Network controllers may utilize the SMBus 2.0 interface for MCTP communications. OCP NIC 3.0 does not support MCTP over I<sup>2</sup>C due to the use of specific SMBus 2.0 addressing. Proper power domain isolation shall be implemented on the NIC.

#### 4.9.1 SMBus Address Map

OCP NIC 3.0 cards shall support SMBus Address Resolution Protocol (ARP) to allow each device to be dynamically assigned an addresses for MCTP communication. This method automatically resolves address conflicts and eliminate the need for manual configuration of addresses. The address type of dynamic addresses can be either a dynamic and persistent address device or a dynamic and volatile address device. Refer to SMBus 2.0 specification and Section 6.11 of DSP0237 1.1 for details on SMBus address assignment.

A system implementation may choose to only use fixed addresses for an OCP NIC 3.0 card on the system. The assignment of these fixed addresses is system dependent and outside the scope of this specification. When fixed addresses are assigned to OCP NIC 3.0 card, then the OCP NIC 3.0 card shall be a fixed and discoverable SMBus device. Refer to SMBus 2.0 specification for more details.

All predefined SMBus addresses for OCP NIC 3.0 are shown in Table 57. Baseboard and OCP NIC 3.0 card designers must ensure additional devices do not conflict. The addresses shown are in 8-bit format and represent the read/write address pair.

Table 57: FRU EEPROM Address Map

| Physical Slot (Dec.) | SLOT_ID[1:0] |            | FRU EEPROM Address |          |       |                |             |
|----------------------|--------------|------------|--------------------|----------|-------|----------------|-------------|
|                      | Pin OCP_A6   | Pin OCP_B7 | A2                 | A1       | A0    | Binary Address | Hex Address |
|                      | SLOT_ID1     | SLOT_ID0   | SLOT_ID1           | SLOT_ID0 | Fixed |                |             |
| Slot 0               | 0            | 0          | 0                  | 0        | 0     | 0b1010_000X    | 0xA0/0xA1   |
| Slot 1               | 0            | 1          | 0                  | 1        | 0     | 0b1010_010X    | 0xA4/0xA5   |
| Slot 2               | 1            | 0          | 1                  | 0        | 0     | 0b1010_100X    | 0xA8/0xA9   |
| Slot 3               | 1            | 1          | 1                  | 1        | 0     | 0b1010_110X    | 0xAC/0xAD   |

## 4.10 FRU EEPROM

### 4.10.1 FRU EEPROM Address, Size and Availability

The FRU EEPROM provided for the baseboard to determine the card type and is directly connected to the SMBus on the card edge. Only one EEPROM is required for a single physical OCP NIC 3.0 card regardless of the PCIe width or number of physical card edge connectors it occupies. The FRU EEPROM is mandatory and shall be connected to the Primary Connector SMBus.

The EEPROM is addressable at the addresses indicated in Table 57. The write/read pair is presented in 8-bit format. The size of EEPROM shall be at least 4Kbits for the base EEPROM map. OCP NIC 3.0 card suppliers may use a larger size EEPROM if needed to store vendor specific information. The FRU EEPROM shall use double byte addressing. The FRU EEPROM shall be write protected for production cards by pulling the EEPROM WP pin high to +3.3V\_EDGE. The FRU shall be writable for manufacturing test and during card development by pulling the EEPROM WP pin low to ground.

The FRU EEPROM is readable in all three power states (ID mode, AUX(S5) mode, and MAIN(S0) mode).

### 4.10.2 FRU EEPROM Content Requirements

The FRU EEPROM shall follow the data format specified in the IPMI Platform Management FRU Information Storage Definition v1.0 Document Revision 1.3. Both the Product Info and Board Info records shall be populated in the FRU EEPROM. Where applicable, fields common to the Product Info and Board Info records shall be populated with the same values so they are consistent.

The OEM record 0xC0 is used to store specific records for the OCP NIC 3.0. For an OCP NIC 3.0 card, the FRU EEPROM OEM record content based on the format defined in Table 58 shall be populated.

Note: Table 58 only shows a portion of the OEM record. The complete record includes a Common Header and valid record checksum as defined in the IPMI Platform Management FRU Information Storage Definition specification.

Table 58: FRU EEPROM Record – OEM Record 0xC0, Offset 0x00

| Offset | Length | Description   |
|--------|--------|---|
| 0      | 3      | <b>Manufacturer ID.</b><br>For OCP NIC 3.0 compliant cards, the value of this field shall be set to the OCP IANA assigned number. This value is 0x7FA600, LS byte first. (42623 in decimal) |
| 3      | 1      | <b>OCP NIC 3.0 FRU OEM Record Version.</b>  |

|   |   |   |
|---|---|---|
|   |   | For OCP NIC 3.0 cards compliant to this specification, the value of this field shall be set to 0x01.  |
| 4 | 1 | <p><b>Card Max power (in Watts) in MAIN (S0) mode.</b></p> <p>The encoded value is the calculated max power of the OCP NIC 3.0 card in the Main Power (S0) mode only and does not include the consumed power by transceivers plugged into the line side receptacle(s).</p> <p>0x00 – 0xFE – Card power rounded up to the nearest Watt for fractional values.<br/>0xFF – Unknown</p>   |
| 5 | 1 | <p><b>Card Max power (in Watts) in AUX (S5) mode.</b></p> <p>The encoded value is the calculated max power of the OCP NIC 3.0 card in the Aux Power (S5) mode only and does not include the consumed power by transceivers plugged into the line side receptacle(s).</p> <p>0x00 – 0xFE – Card power rounded up to the nearest Watt for fractional values.<br/>0xFF – Unknown</p>   |
| 6 | 1 | <p><b>Hot Aisle Card Cooling Tier.</b></p> <p>The encoded value reports the OCP NIC 3.0 Card Hot Card Cooling Tier as defined in Section 6.6.1.</p> <p>0x00 – RSVD<br/>0x01 – Hot Aisle Cooling Tier 1<br/>0x02 – Hot Aisle Cooling Tier 2<br/>0x03 – Hot Aisle Cooling Tier 3<br/>0x04 – Hot Aisle Cooling Tier 4<br/>0x05 – Hot Aisle Cooling Tier 5<br/>0x06 – Hot Aisle Cooling Tier 6<br/>0x07 – Hot Aisle Cooling Tier 7<br/>0x08 – Hot Aisle Cooling Tier 8<br/>0x09 – Hot Aisle Cooling Tier 9<br/>0x0A – Hot Aisle Cooling Tier 10<br/>0x0B – Hot Aisle Cooling Tier 11<br/>0x0C – Hot Aisle Cooling Tier 12<br/>0x0D – 0xFE – Reserved<br/>0xFF – Unknown</p> |
| 7 | 1 | <p><b>Cold Aisle Card Cooling Tier.</b></p> <p>The encoded value reports the OCP NIC 3.0 Card Cold Aisle Cooling Tier as defined in Section 6.6.2.</p> <p>0x00 – RSVD<br/>0x01 – Cold Aisle Cooling Tier 1<br/>0x02 – Cold Aisle Cooling Tier 2<br/>0x03 – Cold Aisle Cooling Tier 3<br/>0x04 – Cold Aisle Cooling Tier 4<br/>0x05 – Cold Aisle Cooling Tier 5<br/>0x06 – Cold Aisle Cooling Tier 6<br/>0x07 – Cold Aisle Cooling Tier 7<br/>0x08 – Cold Aisle Cooling Tier 8<br/>0x09 – Cold Aisle Cooling Tier 9<br/>0x0A – Cold Aisle Cooling Tier 10<br/>0x0B – Cold Aisle Cooling Tier 11</p>  |

|    |   |  |
|----|---|--|
|    |   | <p>0x0C – Cold Aisle Cooling Tier 12<br/> 0x0D – 0xFE – Reserved<br/> 0xFF – Unknown</p>   |
| 8  | 1 | <p><b>Card active/passive cooling.</b><br/> This byte defines if the card has passive cooling (there is no fan on the card) or active cooling (a fan is located on the card).<br/> 0x00 – Passive Cooling<br/> 0x01 – Active Cooling<br/> 0x02 – 0xFE – Reserved<br/> 0xFF – Unknown</p>   |
| 9  | 2 | <p><b>Hot aisle standby airflow requirement.</b><br/> The encoded value represents the amount of airflow, in LFM, required to cool the card in AUX (S5) mode while operating in a hot aisle environment. Refer to Section 6 for more information about the thermal and environmental requirements.<br/> Byte 9 is the LS byte, byte 10 is the MS byte.<br/> 0x0000-0xFFFE – LFM required for cooling card in Hot Aisle Operation.<br/> 0xFFFF – Unknown.</p>   |
| 11 | 2 | <p><b>Cold aisle standby airflow requirement.</b><br/> The encoded value represents the amount of airflow, in LFM, required to cool the card in AUX (S5) mode while operating in a cold aisle environment. Refer to Section 6 for more information about the thermal and environmental requirements.<br/> Byte 11 is the LS byte, byte 12 is the MS byte.<br/> 0x0000-0xFFFE – LFM required for cooling card in Cold Aisle Operation.<br/> 0xFFFF – Unknown.</p>   |
| 13 | 1 | <p><b>UART Configuration 1 – Secondary Connector.</b><br/> This byte denotes the UART configuration 1. A value 0x00 means no serial connection is implemented on the Secondary Connector card edge.<br/> Bits [2:0] denotes the UART baud rate per the encoding table below. If implemented, the encoded field value defines the default baud rate of the OCP NIC 3.0 card serial port.<br/> 0b000 – No serial connection<br/> 0b001 – 115200 baud<br/> 0b010 – 57600 baud<br/> 0b011 – 38400 baud<br/> 0b100 – 19200 baud<br/> 0b101 – 9600 baud<br/> 0b110 – 4800 baud<br/> 0b111 – 2400 baud<br/> Bits [4:3] denotes the number of data bits.<br/> 0b00 – No serial connection<br/> 0b01 – 7 data bits<br/> 0b10 – 8 data bits<br/> 0b11 – Reserved<br/> Bits [7:5] denotes the parity bit character.<br/> 0b000 – No serial connection<br/> 0b001 – None (N)</p> |

|       |    |   |
|-------|----|---|
|       |    | <p>0b010 – Odd (O)<br/> 0b011 – Even (E)<br/> 0b100 – Mark (M)<br/> 0b101 – Space (S)<br/> 0b110 – Reserved<br/> 0b111 – Reserved</p>   |
| 14    | 1  | <p><b>UART Configuration 2 – Secondary Connector.</b></p> <p>This byte denotes the UART configuration 2. A value 0x00 means no serial connection is implemented on the Secondary Connector card edge.</p> <p>Bits [1:0] denotes the number of stop bits.<br/> 0b00 – No serial connection<br/> 0b01 – 1 stop bit<br/> 0b10 – 1.5 stop bits<br/> 0b11 – 2 stop bits</p> <p>Bits [3:2] denotes the flow control method.<br/> 0b00 – No serial connection<br/> 0b01 – Software handshaking<br/> 0b10 – No handshaking<br/> 0b11 – Reserved</p> <p>Bits [7:4] are reserved and shall be encoded to a value of 0b0000.</p> |
| 15    | 1  | <p><b>USB Present – Primary Connector.</b></p> <p>This byte denotes a USB 2.0 connection is implemented on the Primary Connector card edge.</p> <p>0x00 – No USB 2.0 is present or is not implemented on the card edge<br/> 0x01 – A USB 2.0 connection is implemented on the card edge.</p>  |
| 16    | 1  | <p><b>Manageability Type.</b></p> <p>This byte denotes the card manageability type and interface used.</p> <p>0x00 – No manageability<br/> 0x01 – RBT Type<br/> 0x02 – MCTP Type<br/> 0x03 – RBT + MCTP Type<br/> 0x04-0x0FF – Reserved for future use</p>  |
| 17:30 | 14 | <p><b>Reserved for future use.</b></p> <p>Set each byte to 0xFF for this version of the specification.</p>  |
| 31    | 1  | <p><b>Number of physical controllers (N).</b></p> <p>This byte denotes the number of physical controllers on the OCP NIC 3.0 card. If N=0, no controllers exist on this OCP NIC 3.0 card and this is the last byte in the FRU OEM Record.</p> <p>If N≥1, then the controller UDID records below shall be included for each controller N. OCP NIC 3.0 cards may implement up to six physical controllers (N=6) for a Large Form Factor card.</p>   |
| 32:47 | 16 | <p><b>Controller 1 UDID (if applicable).</b></p> <p>This field reports the Controller 1 Universal Device Identifier (UDID) and is used to aid in the dynamic slave address assignment over the SMBus Address Resolution Protocol.</p>   |

|         |    |   |
|---------|----|---|
|         |    | This field shall list the MS Byte First (to align the FRU order to the reported UDID order on the SMBus). This field is populated with the UDID for Controller 1. |
| 48:63   | 16 | <b>Controller 2 UDID</b> (if applicable).   |
| 64:79   | 16 | <b>Controller 3 UDID</b> (if applicable).   |
| 80:95   | 16 | <b>Controller 4 UDID</b> (if applicable).   |
| 96:111  | 16 | <b>Controller 5 UDID</b> (if applicable).   |
| 112:127 | 16 | <b>Controller 6 UDID</b> (if applicable).   |

#### 4.10.3 FRU Template

A FRU template is provided as a baseline implementation example. This FRU template contains the IPMI Platform Management FRU Information Storage Definition v1.2 Product Info, Board Info records as well as the OEM record for OCP NIC 3.0.

The FRU template file may be downloaded from the OCP NIC 3.0 Wiki site:

<http://www.opencompute.org/wiki/Server/Mezz>.

## 5 Routing Guidelines and Signal Integrity Considerations

### 5.1 NC-SI Over RBT

For the purposes of this specification, the OCP NIC 3.0 card NC-SI signals min and max electrical trace length shall be between 2 inches and 4 inches on standard FR4 material. Additional trace length may be achieved with the use of lower loss material. This selection is left up to the card vendor when considering board materials. The traces shall be implemented as 50 Ohm  $\pm$  10% impedance controlled nets. This requirement applies to both the small and large form factor OCP NIC 3.0 cards.

NC-SI Over RBT isolation buffers are required on the system board. The requirements for additional add-in card loading are reduced. OCP NIC 3.0 card and baseboard designers are encouraged to follow the guidelines defined in the RMII and NC-SI specifications for physical routing. Refer to Section 3.4.4 and the DSP0222 specification for example interconnect topologies.

#### 5.1.1.1 Timing Budget

TBD – need to align on topologies.

### 5.2 SMBus 2.0

This section is a placeholder for SMBus 2.0 related routing guidelines and SI considerations. The OCP NIC 3.0 subgroup intends to define the bus operational speed range, capacitive loading, range of pull up resistance values. Doing so allows the baseboard suppliers to design a SMBus interface that is compatible with OCP NIC 3.0 products.

### 5.3 PCIe

This section is a placeholder for the PCIe routing guidelines and SI considerations.

OCP NIC 3.0 card suppliers shall follow the PCIe routing specifications. At this time, the OCP NIC 3.0 subgroup is working to identify and agree to the channel budget for an OCP NIC 3.0 card and leave

sufficient margin for the baseboard. Refer to the PCIe CEM and PCIe Base specifications for end-to-end channel signal integrity considerations.

### 5.3.1 Background

### 5.3.2 Channel Requirements

The OCP NIC 3.0 PCIe channel requirements align with the electrical budget and constraints as detailed in the PCI Express CEM 4.0 Rev 1.0 and PCI Express Base Specification Rev 4.0. Exceptions or clarifications to the referenced specifications are noted in the sections below.

#### 5.3.2.1 REFCLK requirements

REFCLK requirements are detailed in the PCI Express CEM 4.0 Rev 1.0 Section 2.1.

#### 5.3.2.2 Add-in Card Electrical Budgets

This section defines the OCP NIC 3.0 card channel budget from the gold finger edge to the end point silicon. The values listed below are shown for reference and mirrors that of the PCIe CEM 4.0 specification.

Table 59: PCIe Electrical Budgets

| Parameter   | PCIe CEM 4.0 Rev 1.0 Specification Section  |
|---|---|
| AC coupling capacitors                            | Section 4.7.1   |
| Insertion Loss Values (Voltage Transfer Function) | Section 4.7.2 and Appendix A.<br>Section 4.7.10 for 16GT/s  |
| Jitter Values                                     | Section 4.7.3 for 8GT/s and 16GT/s.<br>Also refer to the PCIe Base Specification<br>Section 8.3.5 |
| Crosstalk   | Section 4.7.4   |
| Lane-to-lane skew ( $S_A$ ) for Add-in cards      | Section 4.7.5   |
| Transmitter Equalization                          | Section 4.7.6 and PCIe Base Spec Chapter 9  |
| Skew within a differential pair                   | Section 4.7.7   |
| Differential data trace impedance                 | Section 4.7.8   |
| Differential data trace propagation delay         | Section 4.7.9   |

#### 5.3.2.3 Baseboard Channel Budget

The baseboard channel budget directly follows the PCI Express CEM 4.0 Rev 1.0 specification. Details of the budget are outside of the scope of this specification.

#### 5.3.2.4 SFF-TA-1002 Connector Channel Budget

Reference the SFF-TA-1002 Revision 1.1 or later.

#### 5.3.2.5 Differential Impedance

For PCIe transmit and receive differential pairs, the target impedance is 85 Ohms  $\pm$  10%.

For the PCIe REFCLKs, the target impedance is 100 Ohms  $\pm$  10%.

### 5.3.3 Test Fixtures


Test Fixtures are designed using the PCIe CEM 4.0 CLB and CBB. The fixtures host interface has been modified to the OCP connector standard and there are two version of the fixtures, one for Gen 3 PCIe and one for Gen 4 PCIe. Careful attention has been placed on these fixtures to help insure that standard test equipment automation should work without significant modification.

Table 60: PCIe Test Fixtures for OCP NIC 3.0

| Test Fixture | PCIe Generation | PCB Material      |
|--------------|-----------------|-------------------|
| Load Board   | Gen 3           | TU863             |
|              | Gen 4           | TU883             |
| Base Board   | Gen 3           | TU863             |
|              | Gen 4           | TBD (+vISI board) |


#### 5.3.3.1 Load Board

Figure 96: PCIe Load Board Test Fixture for OCP NIC 3.0 SFF

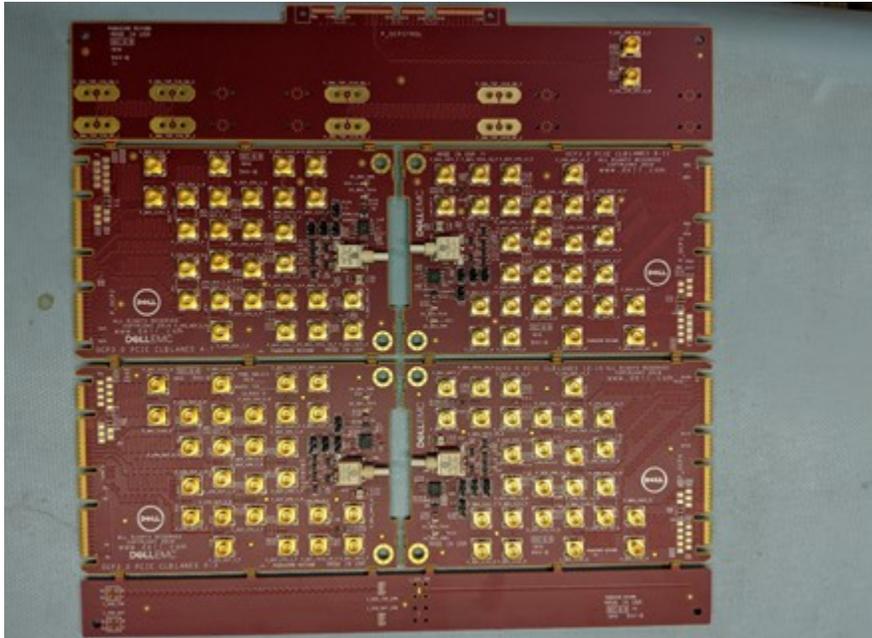

### 5.3.3.2 Baseboard

Figure 97: PCIe Base Board Test Fixture for OCP NIC 3.0 SFF

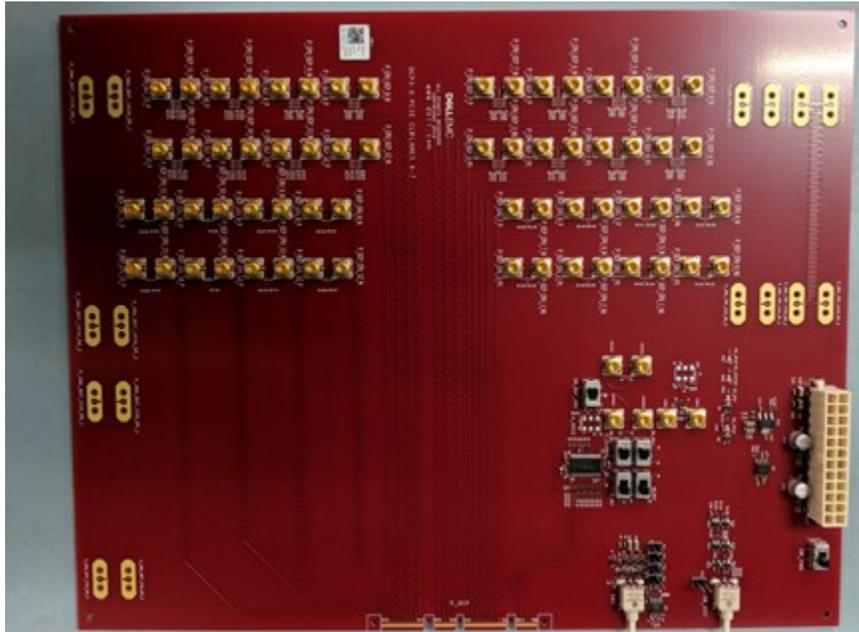

### 5.3.4 Test Methodology

The OCP NIC 3.0 form-factor is compliant to the applicable PCIe specifications. The electrical interface may be tested using the PCIe test methodology providing that the appropriate test fixtures from Section 5.3.3 are used.

### 5.3.5 Impedance (Informative)

#### 5.3.5.1 Add-in Card PCB

#### 5.3.5.2 Baseboard PCB

## 6 Thermal and Environmental

### 6.1 Airflow Direction


The OCP NIC 3.0 card is designed to operate in either of two different airflow directions which are referred to as Hot Aisle and Cold Aisle. In both Hot Aisle and Cold Aisle configurations all airflow is directed over the topside of the card. Component placement must assume that there will be no airflow on the bottom side of the card. The local approach air temperature and velocity to the card is dependent on the capability of the system adopting OCP NIC 3.0 card. These parameters may be impacted by the operational altitude and relative humidity in Hot Aisle or Cold Aisle configurations. Design boundary conditions for Hot Aisle and Cold Aisle cooling are included below in Sections 6.1.1 and 6.1.2 respectively.

The two airflow directions of the Hot and Cold Aisle cases should not result in multiple thermal solutions to separately satisfy the varying thermal boundary conditions. Ideally, any specific OCP NIC 3.0 card design should function in systems with either Hot Aisle or Cold Aisle cooling. Thermal analysis in support of this specification have shown the Hot Aisle configuration to be more challenging than Cold Aisle but card vendors should make that determination for each card that is developed.

#### 6.1.1 Hot Aisle Cooling

The airflow in typical server systems will approach from the card edge or heatsink side of the card. This airflow direction is referred to as Hot Aisle cooling and is illustrated below in Figure 98. The term Hot Aisle refers to the card being located at the rear of the system where the local inlet airflow is preheated by the upstream system components (e.g. HDD, CPU, DIMM, etc.).

Figure 98: Airflow Direction for Hot Aisle Cooling (SFF and LFF)

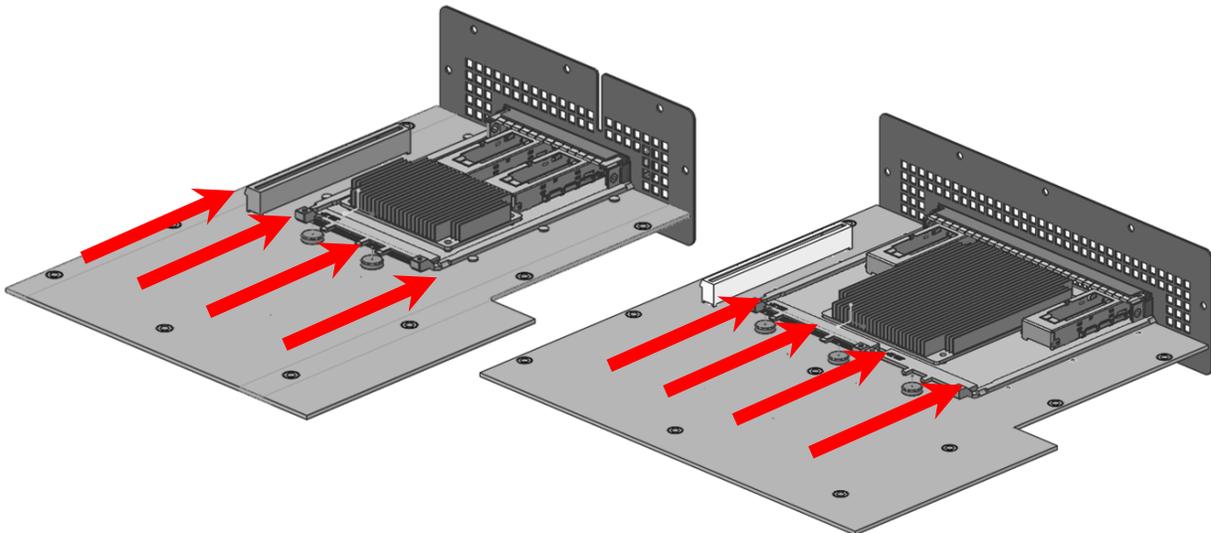

The boundary conditions for Hot Aisle cooling are shown below in Table 61 and Table 62. The low temperature is listed at 5°C and assumes fresh air could be ducted to the back of the system from the front. More typically the inlet temperature to the OCP NIC 3.0 card will be in the same range as PCIe cards located at the back of the system (55°C local inlet temperature). Depending on the system design, power density, and airflow the inlet temperature to the OCP NIC 3.0 card may be as high as 60°C or 65°C. The airflow velocities listed in Table 62 represent the airflow velocities typical in mainstream

servers. Higher airflow velocities are available within the Hot Aisle cooling tiers listed in Table 67 but card designers must be sure to understand the system level implications of such high card LFM requirements.

Table 61: Hot Aisle Air Temperature Boundary Conditions

|                             | Low                   | Typical | High | Max  |
|-----------------------------|-----------------------|---------|------|------|
| Local Inlet air temperature | 5°C<br>(system inlet) | 55°C    | 60°C | 65°C |


Table 62: Hot Aisle Airflow Boundary Conditions

|                          | Low    | Typical     | High    | Max              |
|--------------------------|--------|-------------|---------|------------------|
| Local inlet air velocity | 50 LFM | 100-200 LFM | 300 LFM | System Dependent |

### 6.1.2 Cold Aisle Cooling

When installed in the front of a server the airflow will approach from the I/O connector (e.g. SFP, QSFP or RJ-45) side of the card. This airflow direction is referred to as Cold Aisle cooling and is illustrated below in Figure 99. The term Cold Aisle refers to the card being located at the front of the system where the local inlet airflow is assumed to be the same temperature as the system inlet airflow.

Figure 99: Airflow Direction for Cold Aisle Cooling (SFF and LFF)

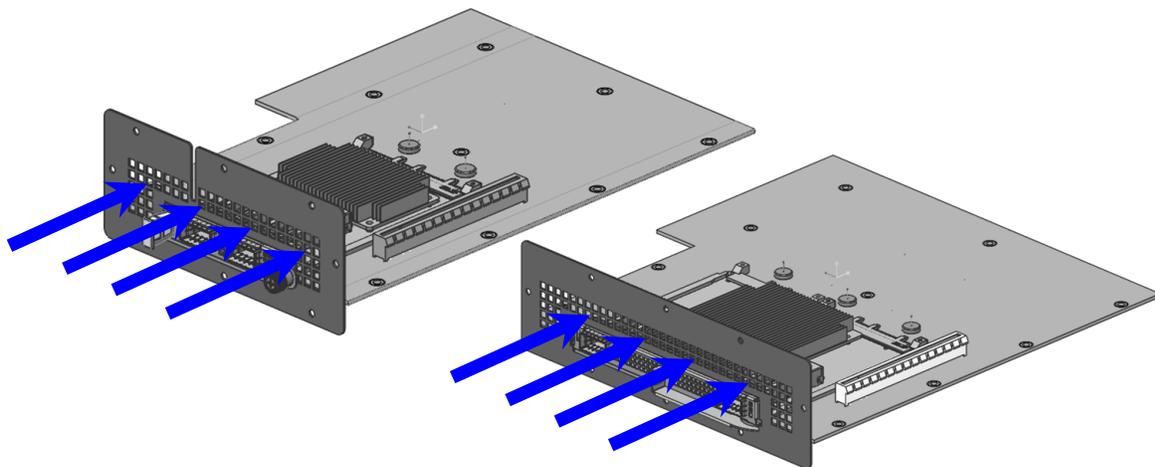

The boundary conditions for Cold Aisle cooling are shown below in Table 63 and Table 64. The temperature values listed in Table 63 assume the inlet temperature to the OCP NIC 3.0 card to be the same as the system inlet. The low, typical, high, and max temperatures listed align with the ASHRAE A1, A2, A3, and A4 environmental classes. Depending on the system, the supported ASHRAE class may limit the maximum temperature to the OCP 3.0 NIC card. However, for more broad industry support, cards should be designed to the upper end of the ASHRAE classes (i.e. A4).

Table 63: Cold Aisle Air Temperature Boundary Conditions

|                             | Low | Typical                 | High              | Max               |
|-----------------------------|-----|-------------------------|-------------------|-------------------|
| Local Inlet Air Temperature | 5°C | 25-35°C<br>ASHRAE A1/A2 | 40°C<br>ASHRAE A3 | 45°C<br>ASHRAE A4 |

Table 64: Cold Aisle Airflow Boundary Conditions

|                          | Low    | Typical | High    | Max              |
|--------------------------|--------|---------|---------|------------------|
| Local Inlet Air Velocity | 50 LFM | 100 LFM | 200 LFM | System Dependent |


## 6.2 Thermal Design Guidelines

The information in this section is intended to serve as a quick reference guide for OCP NIC 3.0 designers early in the design process. The information should be used as a reference for upfront thermal design and feasibility and should not replace detailed card thermal design analysis. The actual cooling capability of the card shall be defined based on the testing with the OCP NIC 3.0 thermal test fixture as defined in Section 6.4.

### 6.2.1 SFF Card ASIC Cooling – Hot Aisle

The ASIC or controller chip is typically the highest power component on the card. Thus, as OCP NIC 3.0 cards are developed it is important to understand the ASIC cooling capability. Figure 100 below provides an estimate of the maximum ASIC power that can be supported as a function of the local inlet velocity for the SFF card in a hot aisle cooling configuration. Each curve in Figure 100 represents a different local inlet air temperature from 45°C to 65°C.

Figure 100: ASIC Supportable Power for Hot Aisle Cooling – SFF

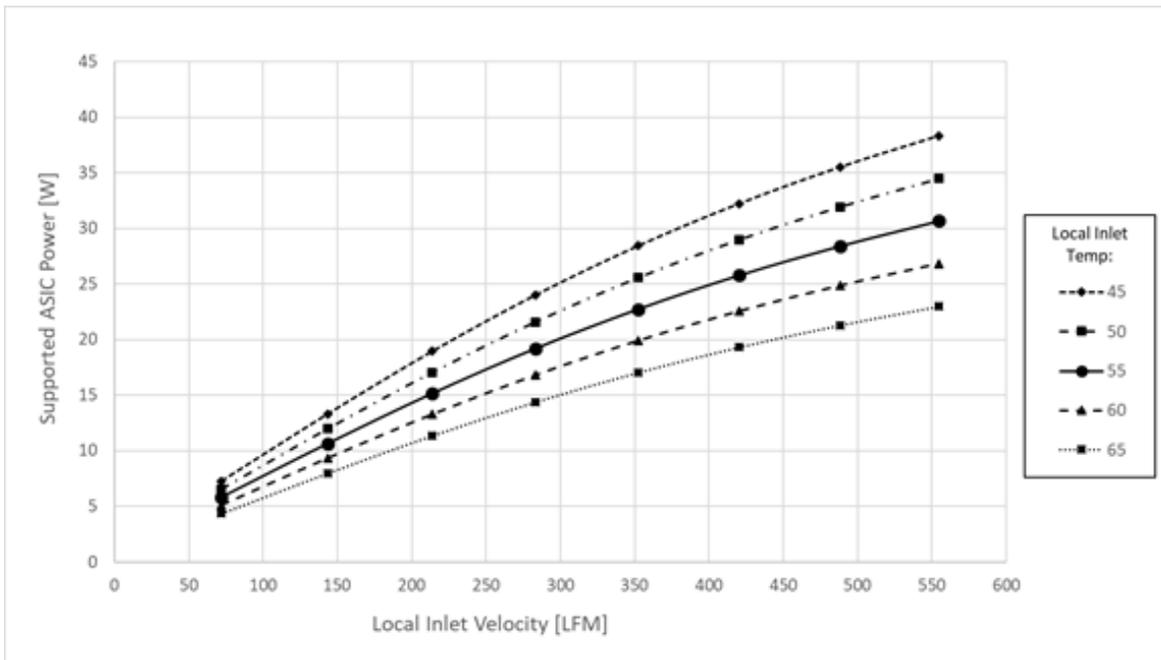

The curves shown in Figure 100 were obtained using CFD analysis of a reference OCP NIC 3.0 SFF card. The reference card has a 20mm x 20mm ASIC with two QSFP connectors. Figure 101 shows a comparison of the 3D CAD and CFD model geometry for the reference OCP NIC 3.0 card. Additional card geometry parameters and boundary conditions used in the reference CFD analysis are summarized in Table 65. The OCP NIC 3.0 simulation was conducted within a virtual version of the test fixture defined in Section 6.4.

Figure 101: OCP NIC 3.0 SFF Reference Design and CFD Geometry

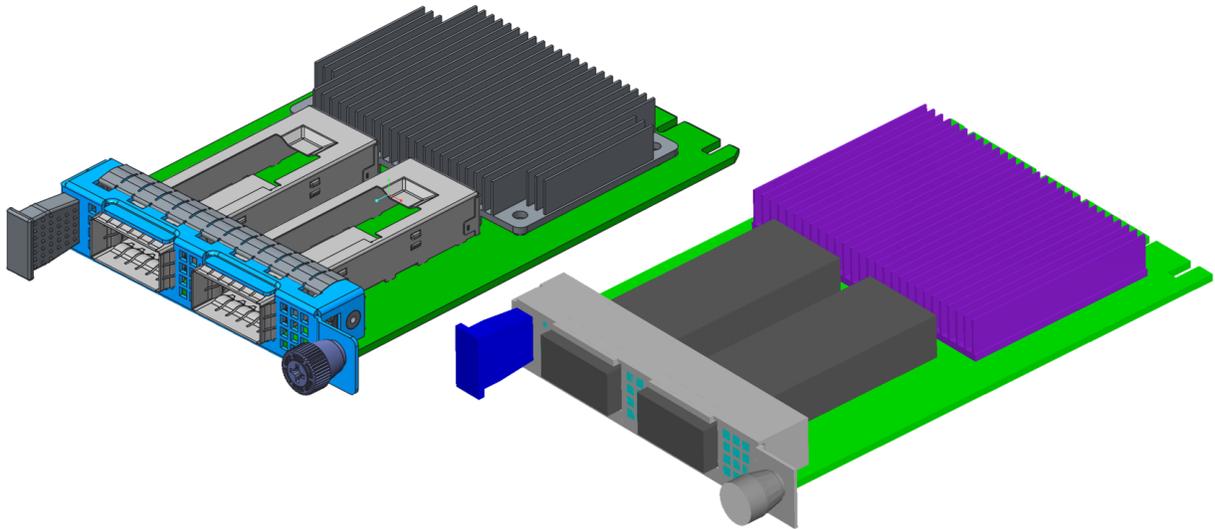


Table 65: Reference OCP NIC 3.0 SFF Card Geometry

| OCP NIC 3.0 Form Factor       | SFF Card             |
|-------------------------------|----------------------|
| Heatsink Width                | 65mm                 |
| Heatsink Length               | 45mm                 |
| Heatsink Height               | 9.24mm               |
| Heatsink Base Thickness       | 1.5mm                |
| Fin Count/Thickness           | 28/0.5mm             |
| Heatsink Material             | Extruded Aluminum    |
| ASIC Width                    | 20                   |
| ASIC Length                   | 20                   |
| ASIC Height                   | 2.26                 |
| ASIC Theta-JC                 | 0.17 C/W             |
| ASIC Theta-JB                 | 10 C/W               |
| OCP PCB In-Plane Conductivity | 34 W/mK              |
| OCP PCB Normal Conductivity   | 0.33 W/mK            |
| ASIC Max T-case               | 95°C                 |
| OCP NIC 3.0 I/O Connectors    | Two QSFP @ 3.5W each |


An increase in the supported ASIC power or a decrease in the required airflow velocity may be achieved through heatsink size and material changes. For example, a larger heatsink or a heatsink made out of copper could improve ASIC cooling and effectively shift up the supportable power curves shown in Figure 100.

It is important to point out that the curves shown in Figure 100 represent only the maximum ASIC power that can be supported vs. the supplied inlet velocity. Other heat loads on the card may require airflow velocities above and beyond that required to cool the ASIC. SFP or QSFP optical transceivers located downstream of the ASIC will in many cases pose a greater cooling challenge than the ASIC cooling.

Cooling the optical transceivers becomes even more difficult as the ASIC power is increased due to additional preheating of the air as it moves through the ASIC heatsink. OCP NIC 3.0 designers must consider all heat sources early in the design process to ensure the card thermal solution is sufficient for the feature set.

Card designers must also consider the airflow capability of the server systems that the cards are targeted for use within. Figure 102 below shows the SFF ASIC supportable power curves with an overlay of three server airflow capability ranges. Designers must ensure that their thermal solutions and resulting card airflow requirements fall within the range of supportable system airflow velocity. Cards that are under-designed (e.g. require airflow greater than the system capability) will have thermal issues when deployed into the server system. Card designers are advised to work closely with system vendors to ensure they target the appropriate airflow and temperature boundary conditions.


Figure 102: Server System Airflow Capability – SFF Card Hot Aisle Cooling

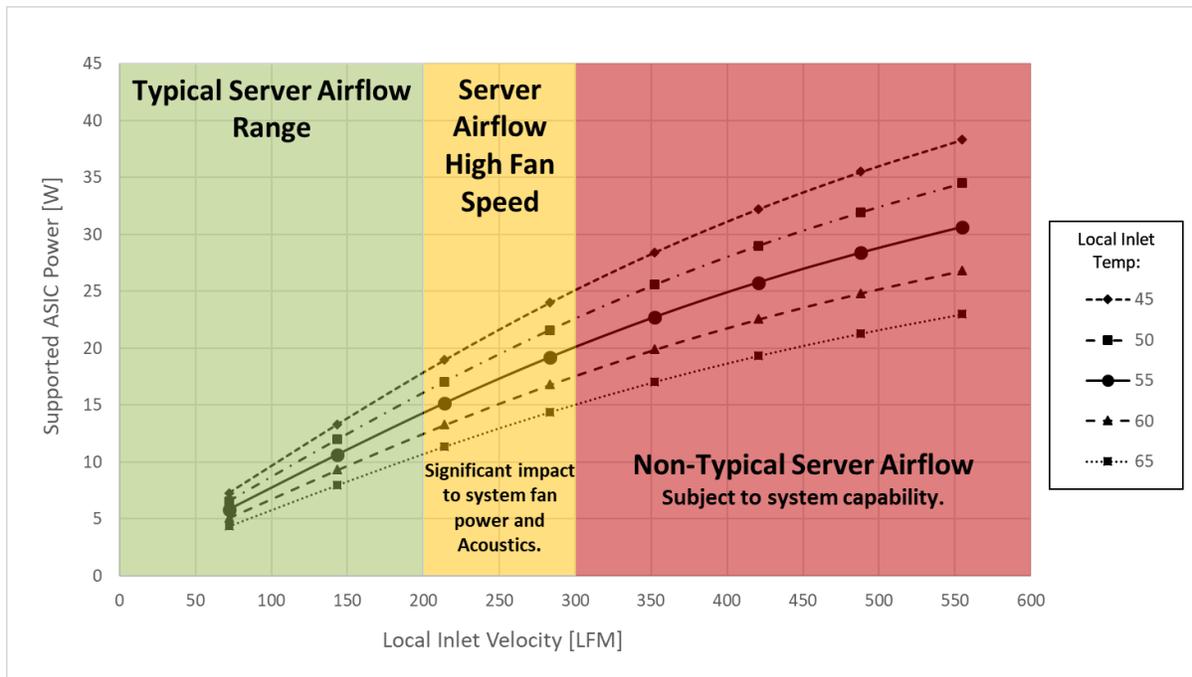

### 6.2.2 LFF Card ASIC Cooling – Hot Aisle

Figure 103 below provides an estimate of the maximum ASIC power that can be supported as a function of the local inlet velocity for the LFF card in a hot aisle cooling configuration. Each curve in Figure 103 represents a different local inlet air temperature from 45°C to 65°C.

Figure 103: ASIC Supportable Power for Hot Aisle Cooling – LFF Card

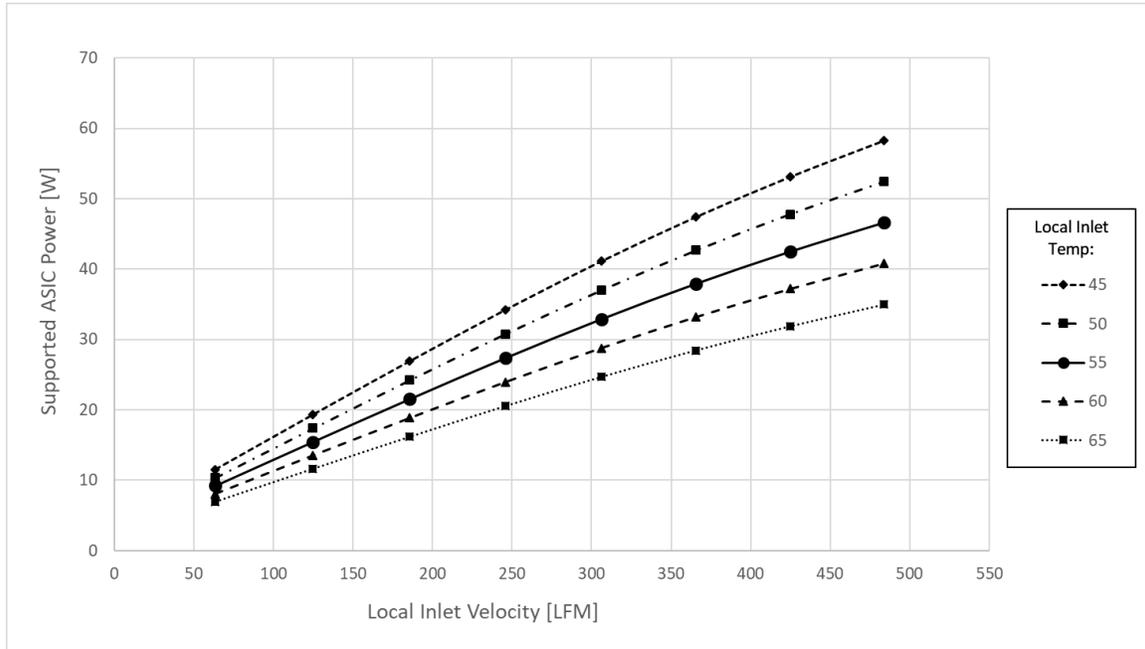

The curves shown in Figure 103 were obtained using CFD analysis of the reference OCP NIC 3.0 LFF card. The reference card has a 45mm x 45mm ASIC with two QSFP connectors. Additional card geometry parameters and boundary conditions used in the reference CFD analysis are summarized in Table 66. Figure 104 shows a comparison of the 3D CAD and CFD model geometry for the reference OCP NIC 3.0 card.

Figure 104: OCP NIC 3.0 LFF Reference Design and CFD Geometry

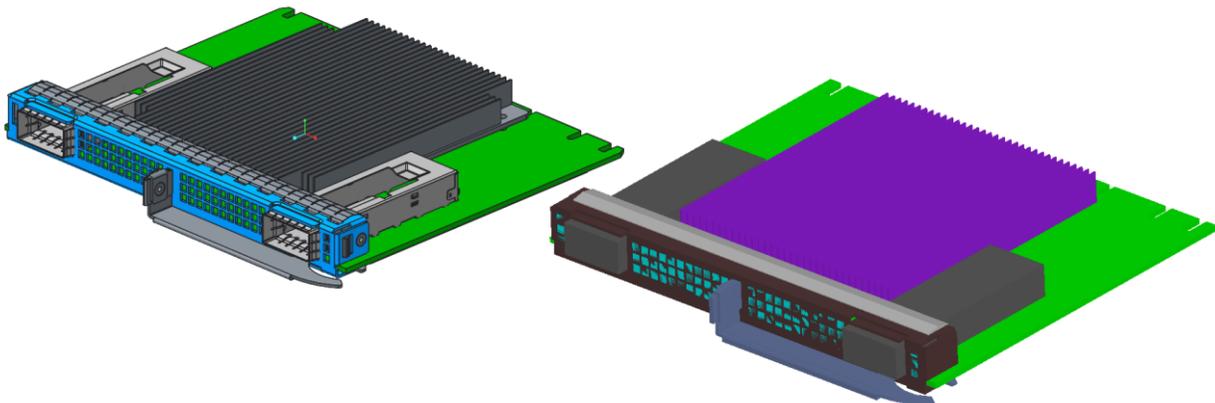



Table 66: Reference OCP NIC 3.0 LFF Card Geometry

| OCP NIC 3.0 Form Factor       | LFF Card             |
|-------------------------------|----------------------|
| Heatsink Width                | 75mm                 |
| Heatsink Length               | 85mm                 |
| Heatsink Height               | 9.3mm                |
| Heatsink Base Thickness       | 1.5mm                |
| Fin Count/Thickness           | 33/0.5mm             |
| Heatsink Material             | Extruded Aluminum    |
| ASIC Width                    | 45                   |
| ASIC Length                   | 45                   |
| ASIC Height                   | 2.13                 |
| ASIC Theta-JC                 | 0.17 C/W             |
| ASIC Theta-JB                 | 10 C/W               |
| OCP PCB In-Plane Conductivity | 34 W/mK              |
| OCP PCB Normal Conductivity   | 0.33 W/mK            |
| ASIC T-case Max               | 95°C                 |
| OCP NIC 3.0 I/O Connectors    | Two QSFP @ 3.5W each |

It is important to note that the supportable power for the LFF card is considerably higher than for the SFF card due to the increased size of the ASIC heatsink. In addition, optics module cooling on the LFF card will also be considerably improved due to the arrangement of the optics in parallel to the ASIC heatsink rather than in series. These thermal advantages are key drivers for the LFF card geometry. The OCP NIC 3.0 simulation was conducted within a virtual version of the LFF card test fixture defined in Section 6.4.

Figure 105 below shows the LFF ASIC supportable power curves with an overlay of three server airflow capability ranges. Designers must ensure that their thermal solutions and resulting card airflow requirements fall within the range of supportable system airflow velocity. Cards that are under-designed (e.g. require airflow greater than the system capability) will have thermal issues when deployed into the server system. Card designers are advised to work closely with system vendors to ensure they target the appropriate airflow and temperature boundary conditions.

Figure 105: Server System Airflow Capability – LFF Card Hot Aisle Cooling

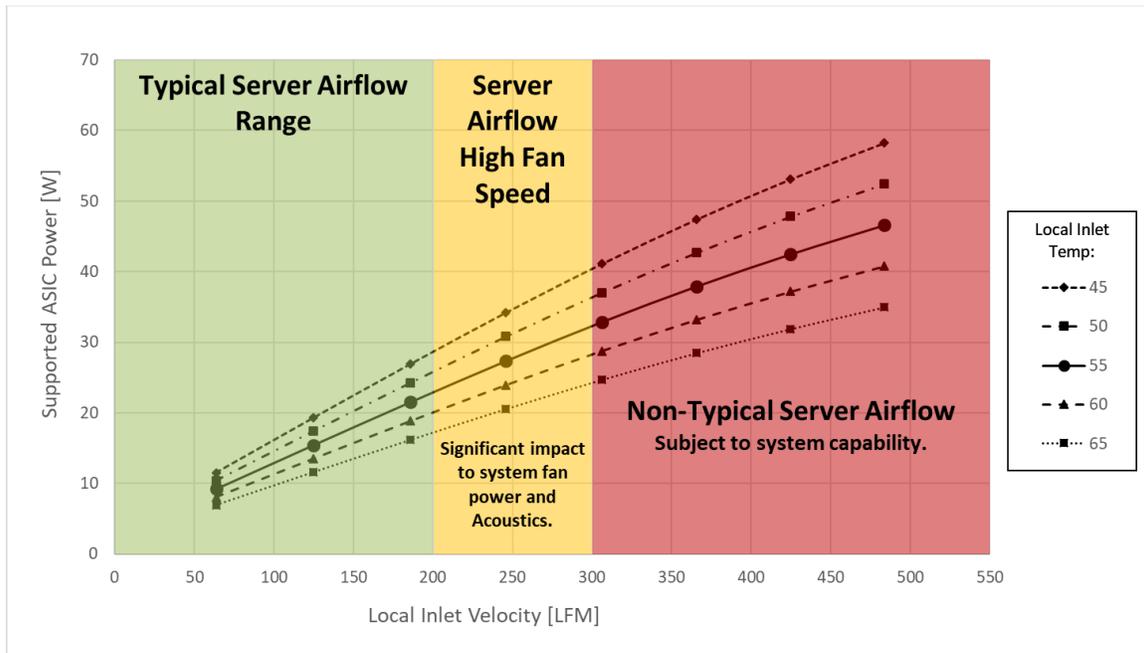


### 6.2.3 SFF Card ASIC Cooling – Cold Aisle

Compared to the Hot Aisle cooling configuration, there are several key differences for Cold Aisle ASIC cooling. With Cold Aisle cooling the airflow is pulled from the I/O connector side of the card. The I/O connectors and faceplate venting may affect the airflow through the ASIC heatsink. The I/O connectors may also preheat the airflow by some amount. In a Cold Aisle cooling configuration, other parallel airflow paths may result in less airflow passing over and through the OCP NIC 3.0 card compared to the Hot Aisle.


The ASIC cooling analysis for the SFF Card in the Cold Aisle configuration was conducted utilizing the same geometry and boundary conditions described in Figure 101 and Table 65 with airflow moving from I/O connector to ASIC (opposite to the Hot Aisle analysis). Figure 106 below shows the results of this analysis for the Cold Aisle cooling configuration. Each curve in Figure 106 represents a different system inlet air temperature from 25°C to 45°C.

Figure 106: ASIC Supportable Power for Cold Aisle Cooling – SFF Card

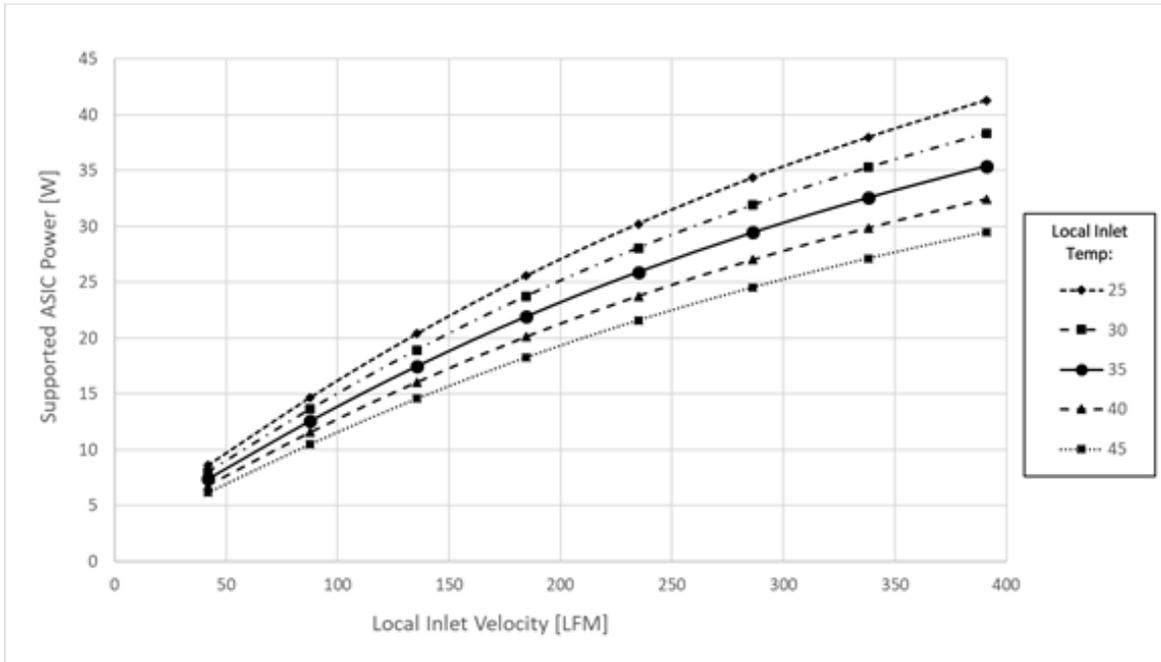


Similar to Figure 102 for Hot Aisle cooling, Figure 107 below shows the ASIC supportable power curves with an overlay of three Cold Aisle server airflow capability ranges. Designers must ensure that their thermal solutions and resulting card airflow requirements fall within the range of supportable Cold Aisle system airflow velocity. Cards that are under-designed (e.g. require airflow greater than the system capability) will have thermal issues when deployed into the server system. Card designers are advised to work closely with system vendors to ensure they target the appropriate airflow and temperature boundary conditions for both Hot and Cold Aisle cooling.

Figure 107: Server System Airflow Capability – SFF Cold Aisle Cooling

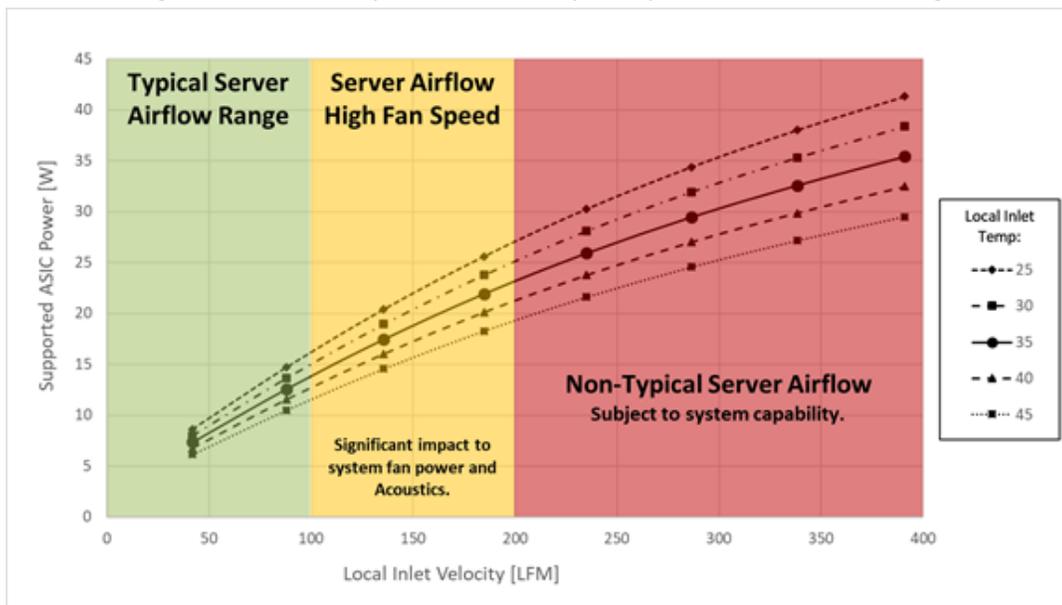

A comparison of Hot Aisle (55°C) and Cold Aisle (35°C) SFF ASIC cooling capability curves is shown below in Figure 108. The comparison shows the Hot Aisle ASIC cooling capability at 12W at 150LFM while the cold Aisle cooling capability shows support for 19W at 150LFM. In general, based on the reference geometry, the Cold Aisle cooling configuration allows for higher supported ASIC power at lower velocities due primarily to the lower inlet temperatures local to the OCP NIC 3.0 card when in the Cold Aisle cooling configuration.


Figure 108: ASIC Supportable Power Comparison – SFF Card

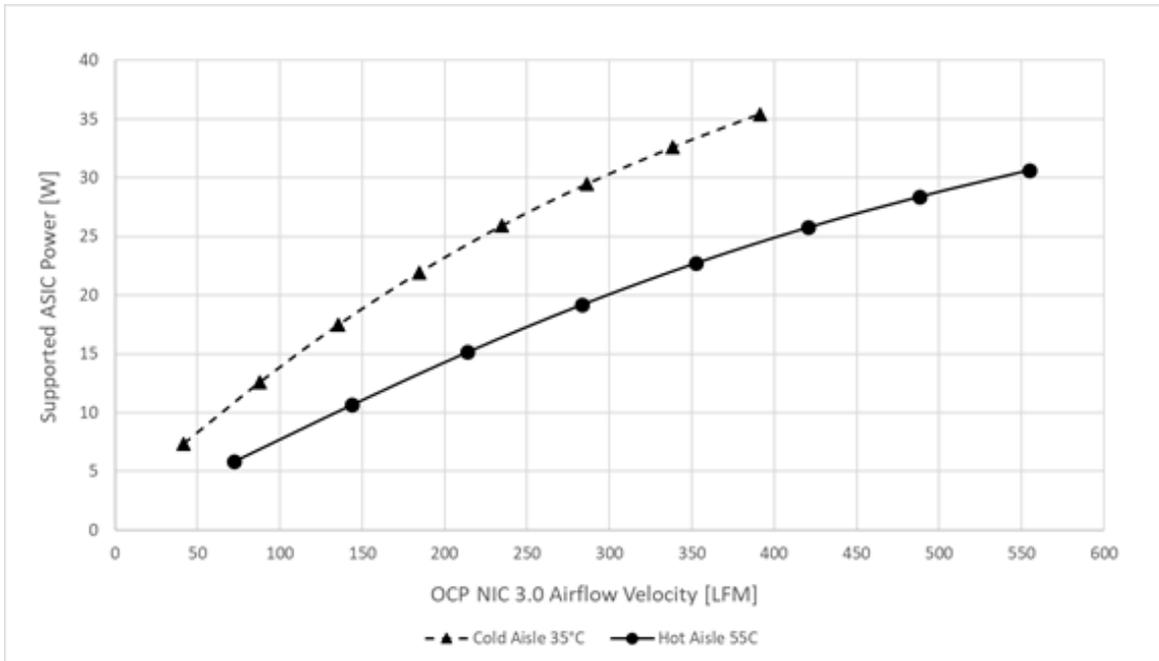

### 6.2.4 LFF Card ASIC Cooling – Cold Aisle


The ASIC cooling analysis for the LFF card in Cold Aisle configuration was conducted utilizing the same geometry and boundary conditions described in Figure 104 and Table 66 with airflow moving from I/O connector to ASIC (opposite to the Hot Aisle analysis). Figure 109 below shows the results of this analysis for the Cold Aisle cooling configuration. Each curve in Figure 109 represents a different system inlet air temperature from 25°C to 45°C.

Figure 109: ASIC Supportable Power for Cold Aisle Cooling – LFF Card

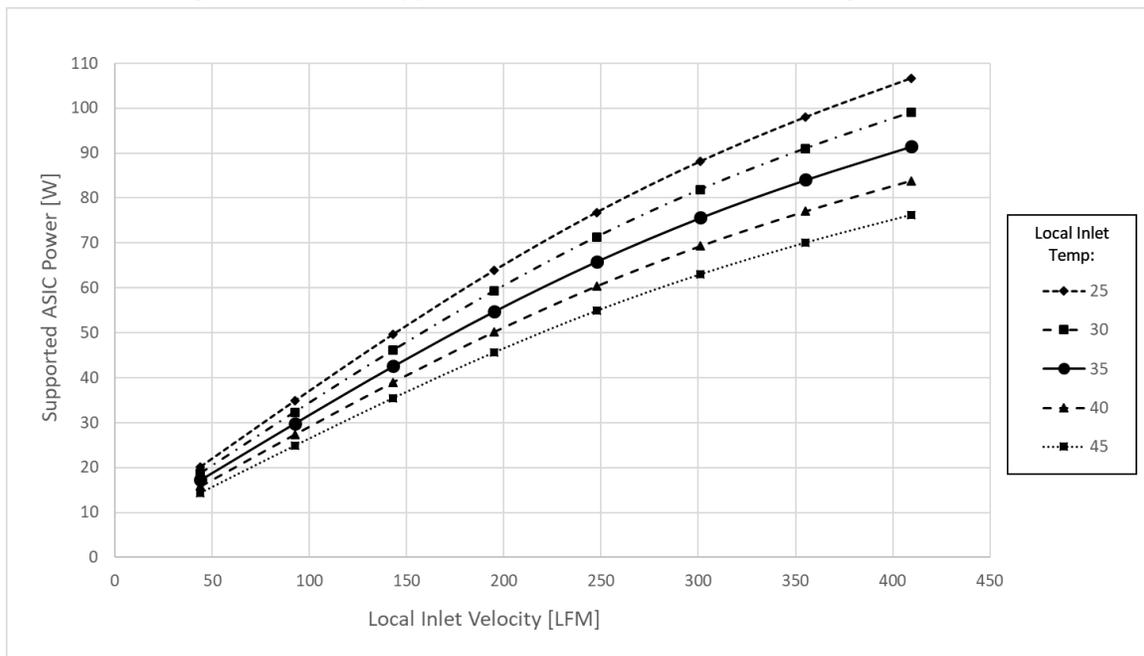


Similar to Figure 107 for LFF Hot Aisle cooling, Figure 110 below shows the LFF ASIC supportable power curves with an overlay of three Cold Aisle server airflow capability ranges. Designers must ensure that their thermal solutions and resulting card airflow requirements fall within the range of supportable Cold Aisle system airflow velocity. Cards that are under-designed (e.g. require airflow greater than the system capability) will have thermal issues when deployed into the server system. Card designers are advised to work closely with system vendors to ensure they target the appropriate airflow and temperature boundary conditions for both Hot and Cold Aisle cooling.

Figure 110: Server System Airflow Capability – LFF Cold Aisle Cooling

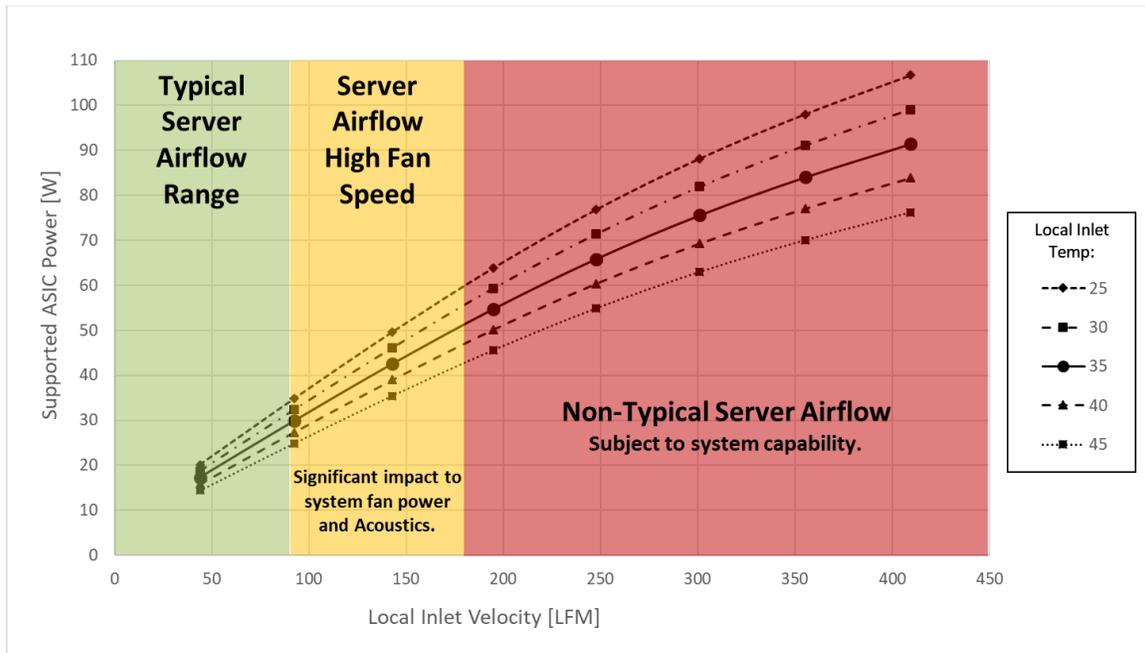

A comparison of Hot Aisle (55°C) and Cold Aisle (35°C) LFF ASIC cooling capability curves is shown below in Figure 111. The comparison shows the Hot Aisle ASIC cooling capability at 19W at 150LFM while the cold Aisle cooling capability shows support for 42W at 150LFM. In general, based on the reference geometry, the Cold Aisle cooling configuration allows for higher supported ASIC power at lower velocities due primarily to the lower inlet temperatures local to the OCP NIC 3.0 card when in the Cold Aisle cooling configuration.

Figure 111: ASIC Supportable Power Comparison – LFF Card

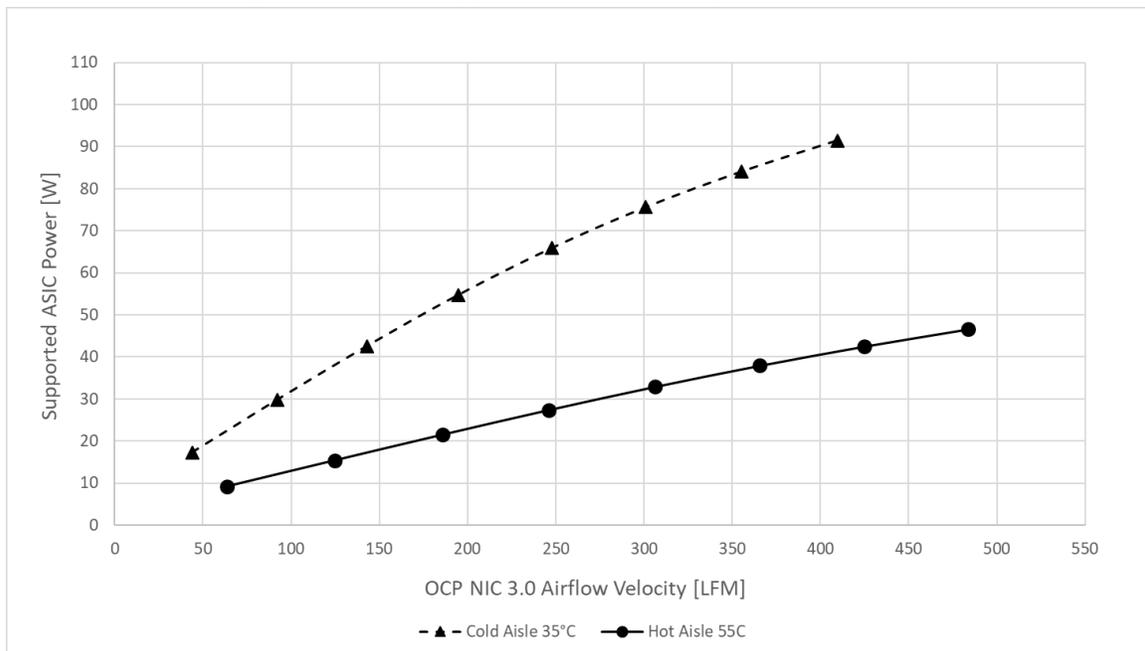

### 6.3 Thermal Simulation (CFD) Modeling

CFD models of the SFF and LFF cards developed for the analysis detailed in Section 6.2 are available for download on the OCP NIC 3.0 Wiki: <http://www.opencompute.org/wiki/Server/Mezz>

The thermal models available on the wiki site are in Icepak format. CAD step file exports from those models are also available to aid in re-creation of the models in other CFD software tools. Note that the geometry utilized in the CFD models is based on the OCP NIC 3.0 thermal test fixture detailed in Section 6.4.

Thermal simulation of OCP NIC 3.0 cards using the provided CFD models is recommended. Ideally, vendors developing OCP NIC 3.0 cards would perform CFD analysis to validate card thermal solutions using the provided CFD models prior to building card prototypes. One prototype is available, vendors would then perform thermal testing on the functional cards using the thermal test fixtures detailed in Section 6.4.

### 6.4 Thermal Test Fixture

Thermal test fixtures have been developed for SFF and LFF OCP NIC 3.0 cards. The test fixtures are intended to provide a common thermal test platform for card vendors, server vendors, and other industry groups planning to develop or utilize the OCP NIC 3.0 card form factors. Details of the thermal test fixtures are as follows:

- Sheet metal side walls, base, faceplate, and top cover
- Thumbscrew top cover access
- PCB sandwiched between base and side walls
- Intended for attachment to wind tunnel or flow bench such as those available at: <http://www.fantester.com/>
- Allows for thermal testing of functional OCP NIC 3.0 cards in a metered airflow environment
- Input power from external power supplies allows for OCP NIC 3.0 card power measurement
  - Power connections for 3.3V, GND, GND, 12V (SFF)
  - Power connections for 3.3V, GND, GND, GND, 12V, 12V (LFF)
- RJ45 connector for NC-SI pass-through
- USB Type-X connector for microprocessor connectivity
- Functions as a remote PCIe extension with intent to position host server under the fixture for connection to system PCIe slot
  - Single x16 connection to server host on bottom side of the fixture PCB (SFF)
  - Dual x16 connection to server host on bottom side of the fixture PCB (LFF)
  - Predefined locations for fixture airflow/temperature sensors on fixture PCB silkscreen. Quantity 3x per board.
  - Quantity 4x for LFF – see Figure 117
  - Candlestick style sensors available at: <https://www.qats.com/Products/Instruments/Temperature-and-Velocity-Measurement/Sensors/Candlestick-Sensor>

- Candlestick sensors must be procured separately, not integrated with fixture PCB
- Blockage above OCP3 card to mimic system geometry and prevent airflow bypass
  - Low profile PCIe card for SFF fixture
- Block sheet metal obstruction built into the top cover for the LFF fixture

CAD Files for the current revision of the test fixture are available for download on the OCP NIC 3.0 Wiki: <http://www.opencompute.org/wiki/Server/Mezz>.

#### 6.4.1 Test Fixture for SFF Card

Images of the SFF thermal test fixture are shown in Figure 112 and Figure 113. The SFF fixture PCB is shown in Figure 114. Note the three candlestick sensor locations directly next to the OCP NIC 3.0 connectors.

Figure 112: SFF Thermal Test Fixture Preliminary Design

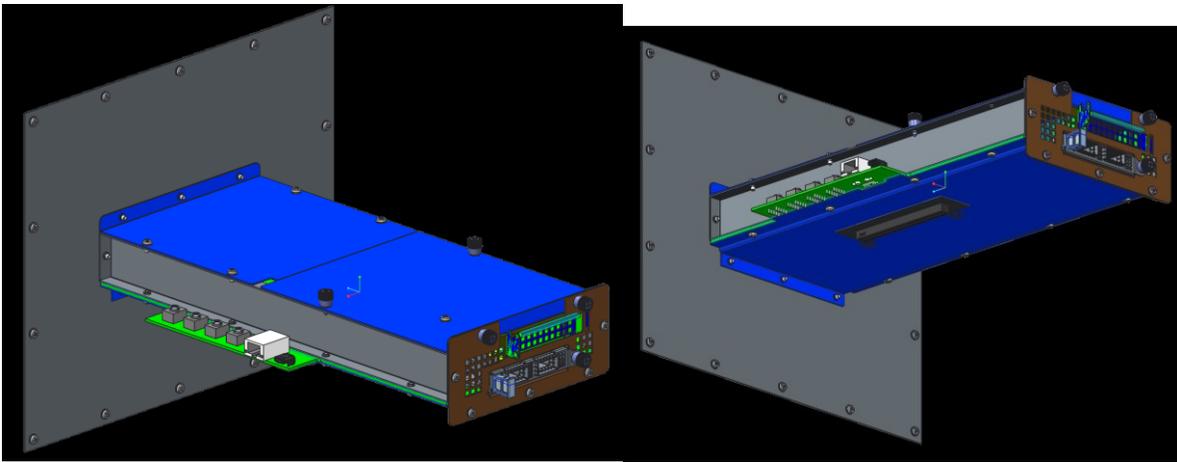


Figure 113: SFF Thermal Test Fixture Preliminary Design – Cover Removed


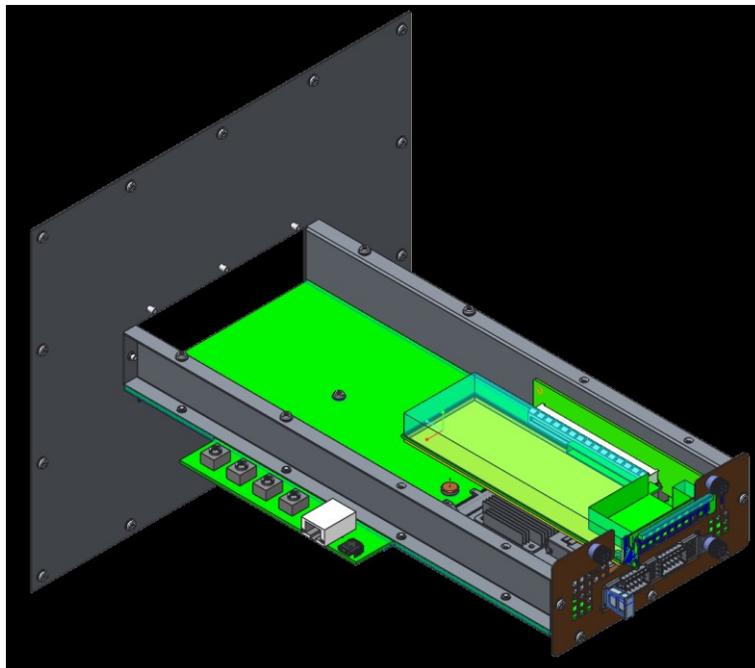


Figure 114: SFF Card Thermal Test Fixture PCB

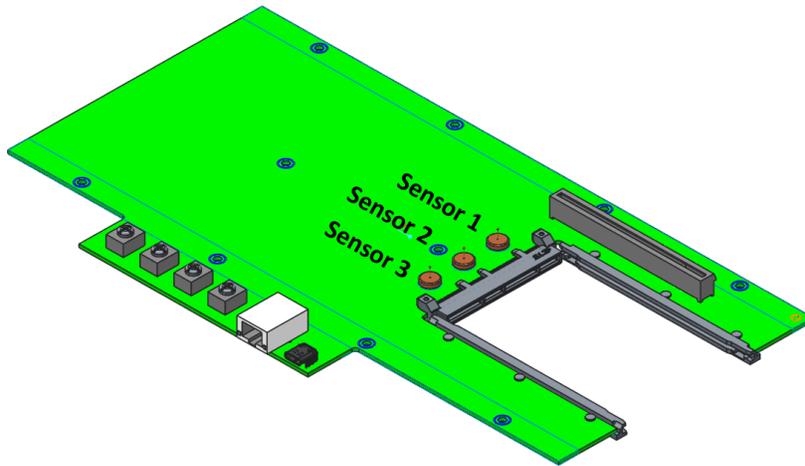

#### 6.4.2 Test Fixture for LFF Card

Images of the LFF thermal test fixture are shown in Figure 115 and Figure 116. The LFF fixture PCB is shown in Figure 117. Note the three candlestick sensor locations directly next to the OCP NIC 3.0 connectors.

Figure 115: LFF Card Thermal Test Fixture Design

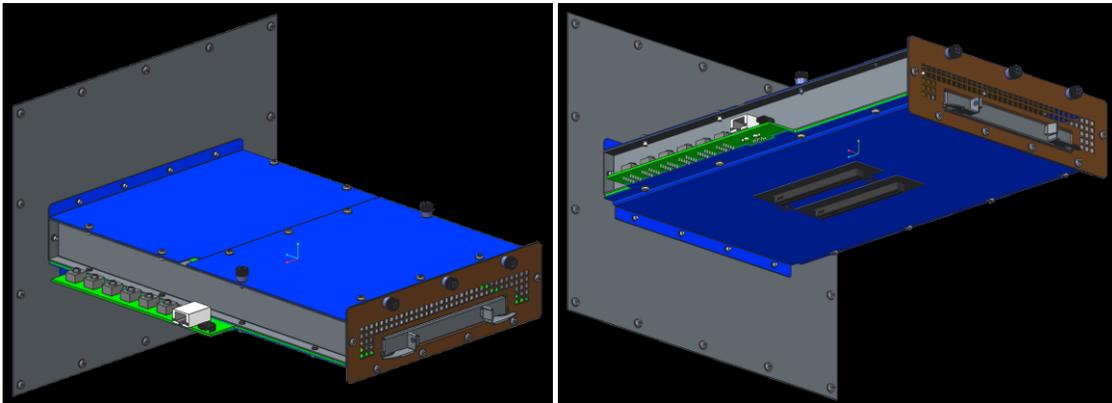


Figure 116: LFF Card Thermal Test Fixture Design – Cover Removed


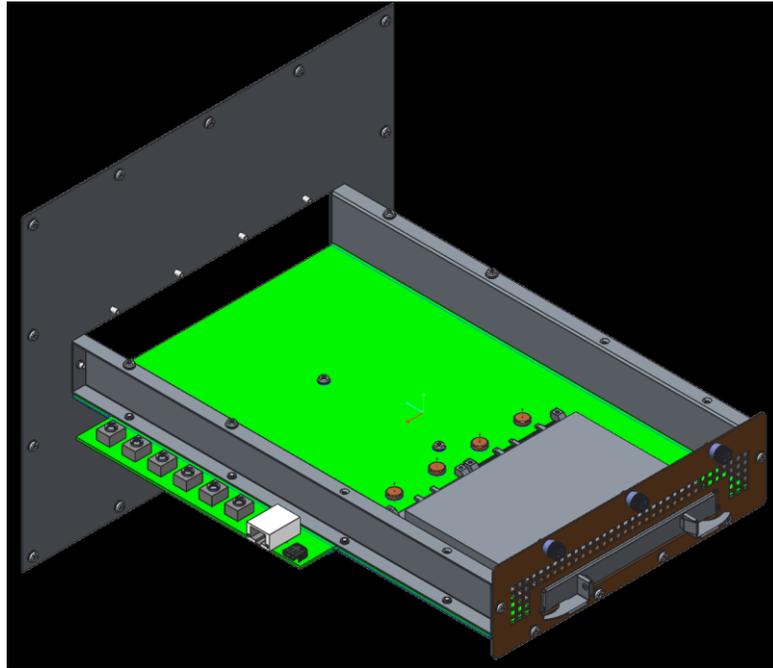



Figure 117: LFF Card Thermal Test Fixture PCB

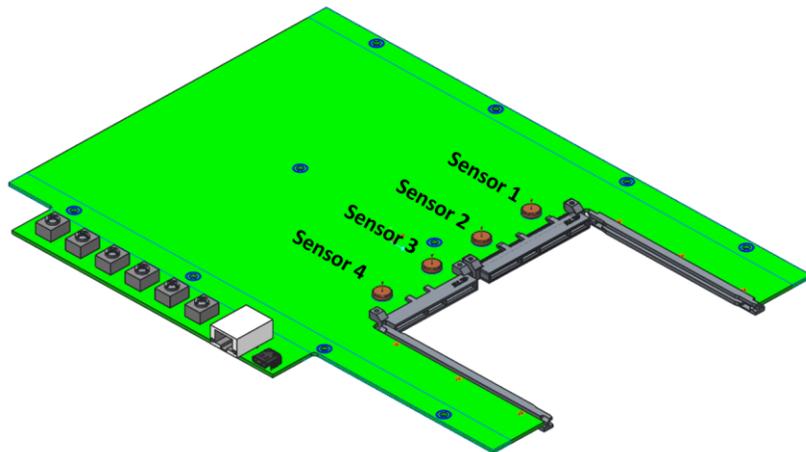

### 6.4.3 Test Fixture Airflow Direction

When utilizing the OCP NIC 3.0 thermal test fixture, the wind tunnel or flow bench must be configured to push airflow for hot aisle cooling or to pull airflow for cold aisle cooling as shown in Figure 118.

Figure 118: Thermal Test Fixture Airflow Direction

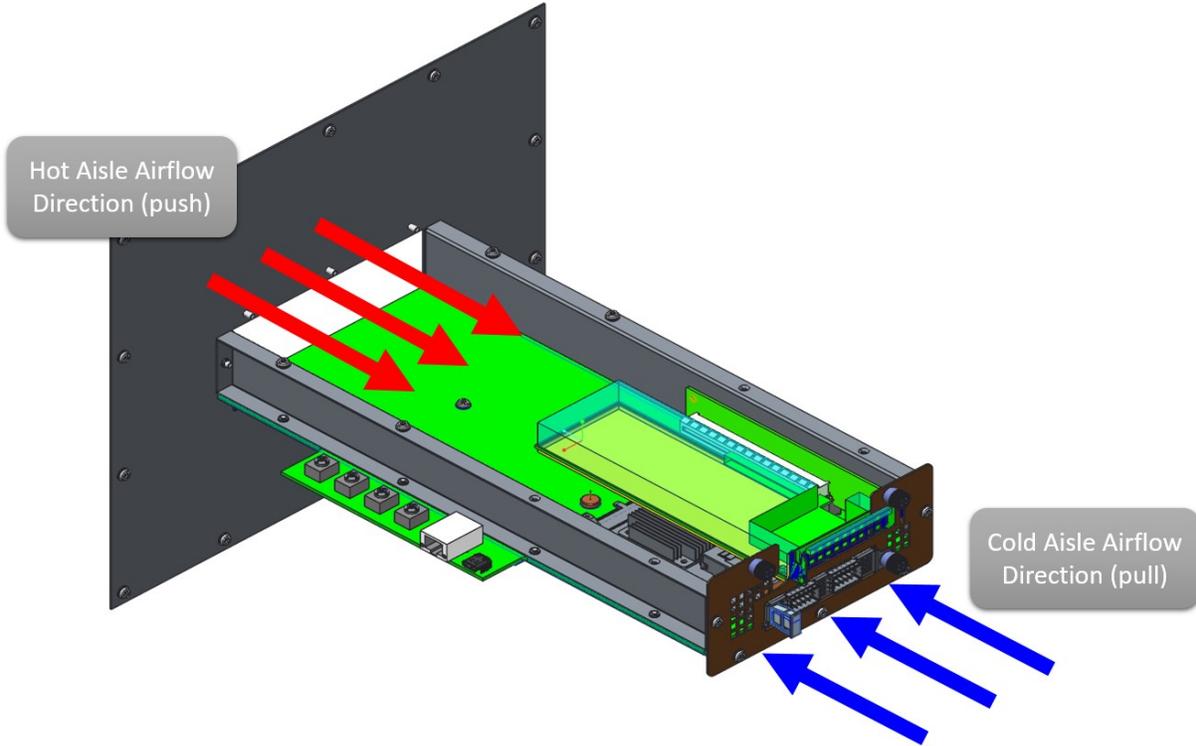

### 6.4.4 Thermal Test Fixture Candlestick Sensors

As noted in previously, candlestick sensor locations are included on the fixture PCB silkscreen. These candlestick sensors provide point measurements for both airflow velocity (LFM) and air temperature. The airflow at the inlet to the OCP NIC 3.0 will differ from the fixture mean velocity due to the obstructions above the OCP NIC 3.0 cards within the fixture. Thus, the fixture flow rate and cross-sectional area should not be used to determine the local velocity at the OCP NIC 3.0 card. Instead, the candlestick velocity/temperature sensors should be utilized to directly measure the local inlet velocity to the cards for hot aisle cooling.

Figure 119 and Figure 120 below show the air velocity at each sensor location vs. the total fixture flow rate in CFM. The curves shown in these figures are based on the data collected from the CFD models discussed in Section 6.3. Note the error between the velocity obtained from the sensor locations vs. the velocity based on the duct cross-sectional area.

Figure 119: SFF Fixture, Hot Aisle Flow - Candlestick Air Velocity vs. Volume Flow


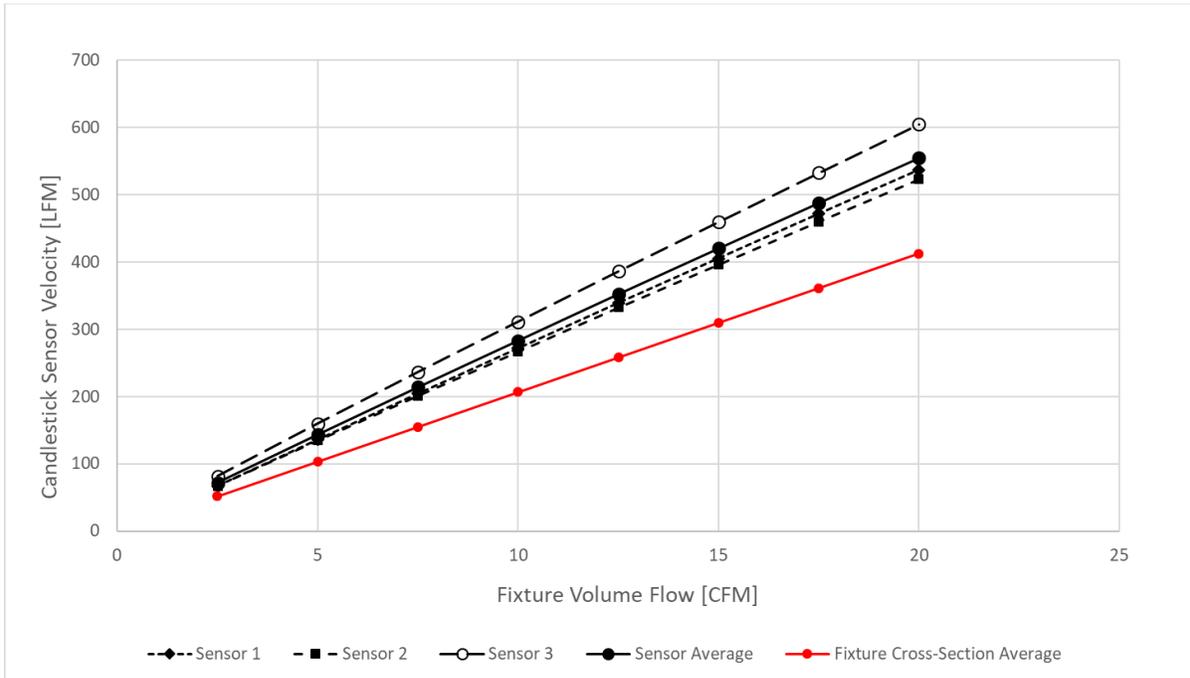


Figure 120: LFF Fixture, Hot Aisle Flow - Candlestick Air Velocity vs. Volume Flow

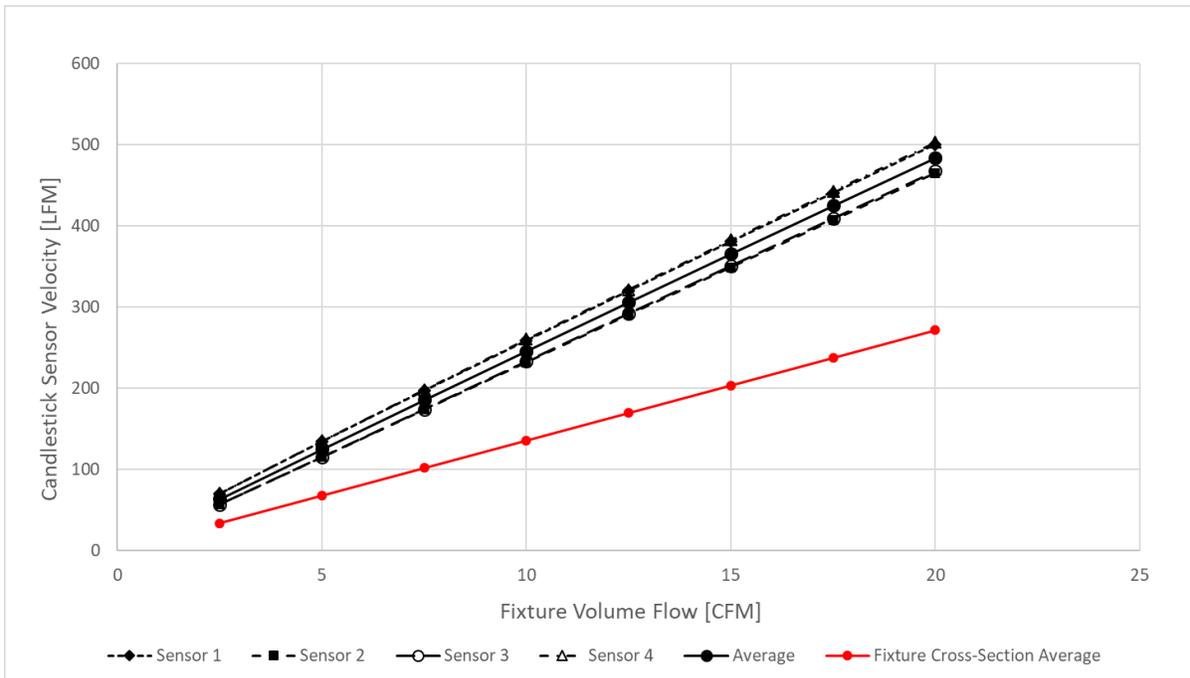

## 6.5 Card Sensor Requirements

See Sections 4.4 to 4.6 for information relating to temperature sensor and reporting requirements.

## 6.6 Card Cooling Tiers

Section 4.10.2 defines a number of registers that may be read by the associated baseboard system. Two of these registers provide the Hot Aisle and Cold Aisle Card Cooling Tiers that may be used for fan speed control. The Card Cooling Tiers relate the card local inlet temperature to the required local inlet velocity which allows the system to set fan speeds according to the cooling requirements of the card.

The Card Cooling Tier registers are particularly useful for systems that do not implement temperature sensor monitoring. The register may also be used as a backup for cards that do implement temperature sensor monitoring.

### 6.6.1 Hot Aisle Cooling Tiers

Card Cooling Tiers for Hot Aisle Cooling are defined in Table 67. The values in the table are listed with units shown in LFM. Future releases of this specification will provide more detail to the Card Cooling Tier curve definition.

Table 67: Hot Aisle Card Cooling Tier Definitions (LFM)

| OCP NIC 3.0<br>Local Inlet<br>Temperature<br>[°C] | Target Operating Region |        |        |        | Server Airflow<br>High Fan Speed |        | Non-Typical Server Airflow - Subject to System Capability |        |        |         |         |         |
|---|-------------------------|--------|--------|--------|----------------------------------|--------|---|--------|--------|---------|---------|---------|
|   | Tier 1                  | Tier 2 | Tier 3 | Tier 4 | Tier 5                           | Tier 6 | Tier 7  | Tier 8 | Tier 9 | Tier 10 | Tier 11 | Tier 12 |
| 5   |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 10  |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 15  |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 20  |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 25  |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 30  |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 35  |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 40  |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 45  |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 50  |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 55  | 50                      | 100    | 150    | 200    | 250                              | 300    | 350   | 400    | 450    | 500     | 750     | 1000    |
| 60  |                         |        |        |        |                                  |        |   |        |        |         |         |         |
| 65  |                         |        |        |        |                                  |        |   |        |        |         |         |         |

Work in Progress

### 6.6.2 Cold Aisle Cooling Tiers

Card Cooling Tiers for Cold Aisle Cooling are defined in Table 68. The values in the table are listed with units shown in LFM. Future releases of this specification will provide more detail to the Card Cooling Tier curve definition.

Table 68: Cold Aisle Card Cooling Tier Definitions (LFM)

| OCP NIC 3.0 Local Inlet Temperature [°C] | Target Operating Region |        |        |        | Server Airflow High Fan Speed |        | Non-Typical Server Airflow - Subject to System Capability |        |        |         |         |         |
|--|-------------------------|--------|--------|--------|-------------------------------|--------|---|--------|--------|---------|---------|---------|
|  | Tier 1                  | Tier 2 | Tier 3 | Tier 4 | Tier 5                        | Tier 6 | Tier 7  | Tier 8 | Tier 9 | Tier 10 | Tier 11 | Tier 12 |
| 5  |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 10                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 15                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 20                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 25                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 30                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 35                                       | 50                      | 100    | 150    | 200    | 250                           | 300    | 350   | 400    | 450    | 500     | 750     | 1000    |
| 40                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 45                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 50                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 55                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 60                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |
| 65                                       |                         |        |        |        |                               |        |   |        |        |         |         |         |

Work in Progress

### 6.7 Non-Operational Shock & Vibration Testing

OCP NIC 3.0 components are deployed in various environments. As such, all OCP NIC 3.0 cards shall be subjected to shock and vibration testing to ensure products do not sustain damage during normal operational or transportation conditions. While end customer deployments may require an additional final system level test, this section sets the minimum shock and vibration requirements for an OCP NIC 3.0 card that must also be considered.

Shock and vibration testing shall be done in accordance with the procedures listed below. The tests shall be conducted using a vertical shock table. The OCP NIC 3.0 card shall be fixtured in the standard test fixture as described in Section 6.7.1.

#### 6.7.1 Shock & Vibe Test Fixture

TBD. Working group to provide description and mechanical details and figures.

#### 6.7.2 Test Procedure

The following procedures shall be followed for the shock and vibration testing:

- A minimum sample size of three OCP NIC 3.0 cards shall be subjected to shock and vibration.
- All samples shall be verified for functionality prior to test.
- The OCP NIC 3.0 card shall be fixtured to simulate how the card will be mounted within a system. For example, the OCP NIC 3.0 card may be fixtured in the horizontal plane with the primary component side facing up for certain chassis configurations.
- The fixture shall be tested on all 6 sides. Each side shall be clearly labeled as 1-6 for test identification purposes. Testing shall be performed in the vertical axis only. The fixture shall be rotated until all six sides have been tested as the product may be dropped from any orientation during handling. Testing shall not be conducted on a three axis slip table.
- Non-operational vibration testing is performed at 1.88G<sub>RMS</sub> for a duration of 15 minutes per side for all six surfaces per Table 69.

Table 69: Random Vibration Testing 1.88G<sub>RMS</sub> Profile


| Frequency (Hz) | G <sup>2</sup> /Hz |
|----------------|--------------------|
| 10             | 0.13               |
| 20             | 0.13               |
| 70             | 0.004              |
| 130            | 0.004              |
| 165            | 0.0018             |
| 500            | 0.0018             |

- Non-operational half-sine shock test at 71G ±5% with a 2ms duration. All six sides shall be tested.
- Non-operational square wave shock test at 32G ±5% at a rate of 270 inches/sec. All six sides shall be tested.
- All cards shall be checked for proper operation after the shock and vibration tests have been conducted. All three samples must be in full operating order to consider the product as a pass.


## 6.8 Dye and Pull Test Method

All Dye and Pull test methods shall be implemented per the IPC-TM-650 method 2.4.53 (Dye and Pull Test Method – formerly known as Dye and Pry). The Dye and Pull test uses a colored dye penetrant to visually indicate cracked solder joints on BGA devices. The test shall only be conducted after the Shock and Vibration testing has been conducted on the test samples. The Dye and Pull Test Method is a destructive test.

- A minimum sample size of three OCP NIC 3.0 cards shall be subjected to the Dye and Pull Test Method.
- All samples shall be first subjected to the Shock and Vibration testing outlined in Section 6.7.
- All samples shall be subjected to the preparation and test procedures of IPC-TM-650 method 2.4.53.
- Following the pull-test operation, the board sample shall be examined for dye indication at the target BGA area. Separation locations are categorized in to the following five areas:
  - Type 1 – Separation between the BGA copper pad and the BGA substrate.
  - Type 2 – Separation between the BGA copper pad and the BGA solder sphere.
  - Type 3 – Separation between the BGA solder sphere and the copper pad on the PCB.
  - Type 4 – Separation between the copper pad on the PCB and the PCB laminate.
  - Type 5 – Separation of the BGA solder sphere.

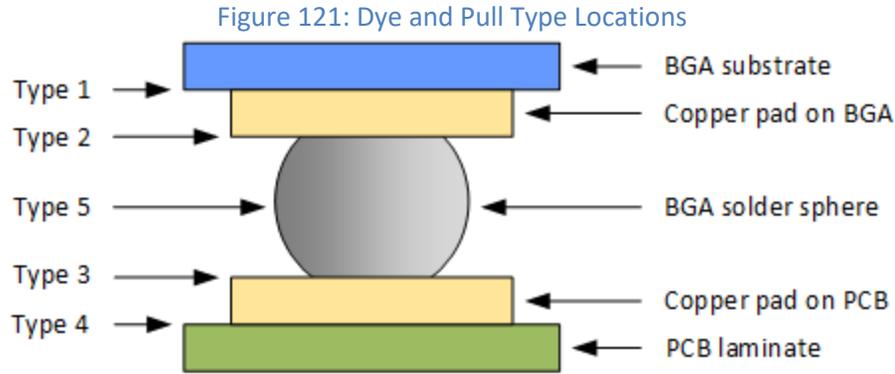

- Samples shall be subjected to the following failure criteria:
  - Dye coverage of >50% (“D” and “E” in Figure 122) of any Type 2 or Type 3 BGA cracks are present in the test sample.
  - One or more Type 1 or Type 4 BGA cracks are present in the test sample.

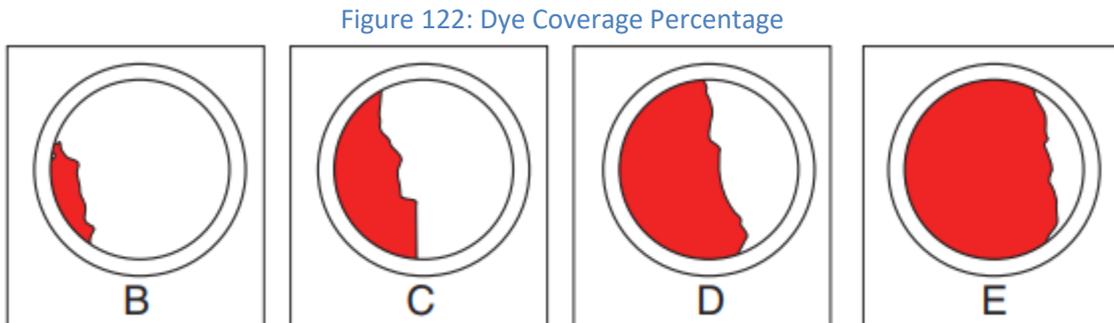

The following exceptions are allowed:

- For “via-in-pad” designs, dye is allowed on the laminate surface (under the pad), as long as the dye has not entered the inner-via laminate area, or is found on the separated via-barrel wall.
- Allowances for dye indications exceeding the 50% limit on mechanical (non-electrical) BGA corner locations or multiple use locations (grounds, powers) may be determined by the appropriate Engineering Team.

## 6.9 Gold Finger Plating Requirements

This section defines the minimum plating/quality requirements for the OCP NIC 3.0 gold fingers.

### 6.9.1 Host Side Gold Finger Plating Requirements

Per Section 6.4 (Environmental Requirements) of the PCIe CEM specification, the minimum host side gold finger plating is 30 microinches of gold over 50 microinches of nickel. OCP NIC 3.0 card vendors shall individually evaluate the minimum plating required.

The recommendation for OCP NIC 3.0 is to 30 microinches of gold over 150 microinches of nickel.

### 6.9.2 Line Side Gold Finger Durability Requirements

The line side connectors must be designed to support a minimum of 250 error free insertion cycles. In order to accomplish this, it is required that the minimum contact plating be as follows:

- SFP and QSFP connectors: 30 microinches of gold over 50 microinches of nickel
- RJ45 connectors have a minimum of 50 microinches of gold over 50 microinches of nickel

## 7 Regulatory

### 7.1 Required Compliance

An OCP NIC 3.0 card shall meet the following Environmental, EMC and safety requirements.

Note: Emissions and immunity tests in Section 7.1.4 are to be completed at the system level. The OCP NIC 3.0 vendors should work with the system vendors to achieve the applicable requirements listed in this section.

#### 7.1.1 Required Environmental Compliance

- China RoHS Directive
- **EU RoHS 2 Directive (2011/65/EU)** aims to reduce the environmental impact of electronic and electrical equipment (EEE) by restricting the use of certain hazardous materials. The substances banned under RoHS are lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls, polybrominated diphenyl ether, and four phthalates.
- **EU REACH Regulation (EC) No 1907/2006** addresses the production and use of chemical substances and their potential impact on human health and the environment.
- **EU Waste Electrical and Electronic Equipment (“WEEE”) Directive (2012/19/EU)** - mandates the treatment, recovery and recycling of EEE.
- **The Persistent Organic Pollutants Regulation (EC) No. 850/2004** bans production, placing on the market and use of certain persistent organic pollutants.
- **The California Safe Drinking Water and Toxic Enforcement Act of 1986 (“Prop 65”)** sets forth a list of regulated chemicals that require warnings in the State of California.
- **The Packaging and Packaging Waste Directive 94/62/EC** limits certain hazardous substances in the packaging materials
- **Batteries Directive 2006/66/EC** regulates the manufacture and disposal of all batteries and accumulators, including those included in appliances.

#### 7.1.2 Required EMC Compliance

- Radiated and Conducted Emissions requirements are based on deployed geographical locations. Refer to Table 70 for details.

Table 70: FCC Class A Radiated and Conducted Emissions Requirements Based on Geographical Location

| Targeted Geography    | Applicable Specifications   |
|-----------------------|---|
| USA                   | FCC, 47 CFR Part 15, Class A digital device (USA)   |
| Canada                | ICES-003, class A (CAN)   |
| EU                    | EN 55032: 2015+AC:2016 Class A Radiated and Conducted Emissions requirements for European Union<br>EN 55024: 2010+A1:2015 Immunity requirements for European Union (EU) |
| Australia/New Zealand | AS/NZS CISPR 32:2015 Class A<br>CISPR 32:2015 for Radiated and Conducted Emissions requirements   |
| Japan                 | VCCI 32-1 Class A Radiated and Conducted Emissions requirements   |

|        |  |
|--------|--|
| Korea  | KN32 – Radiated and Conducted Emissions<br>KN35- Immunity                            |
| Taiwan | BSMI CNS13438: 2006 (complete) Class A Radiated and Conducted Emissions requirements |

- **CE** – Equipment must pass the CE specification
- All technical requirements covered under **EMC Directive (2014/30/EU)**

### 7.1.3 Required Product Safety Compliance

- Safety - requirements are listed in Table 71.

Table 71: Safety Requirements

| Targeted Category | Applicable Specifications   |
|-------------------|---|
| Safety            | UL 60950-1/CSA C22.2 No. 60950-1-07, 2nd Edition + Amendment 1 + Amendment 2, dated 2011/12/19.<br>The Bi-National Standard for Safety of Information Technology Equipment, EN60950-1: 2006+A11:2009+A1:2010+A12:2010+A2:2013<br>IEC 60950-1 (Ed 2) + A1 + A2.<br>62368-1 may also be co-reported depending on region |

### 7.1.4 Required Immunity (ESD) Compliance

The OCP NIC 3.0 card shall meet or exceed the following ESD immunity requirements listed in Table 72.

Table 72: Immunity (ESD) Requirements

| Targeted Category         | Applicable Specifications  |
|---------------------------|--|
| Immunity (ESD)            | EN 55024 2010, and IEC 61000-4-2 2008 for ESD.<br>Required $\pm 4\text{kV}$ contact charge and $\pm 8\text{kV}$ air discharge  |
| NEBS Level III (optional) | Optionally test devices to NEBS level 3 –<br>Required $\pm 8\text{kV}$ contact charge and $\pm 16\text{kV}$ air discharge with interruptions not greater than 2 seconds. The device shall self-recover without operator intervention.<br>Note: NEBS compliance is part of the system level testing. The OCP NIC 3.0 specification is providing a baseline minimum recommendation for ESD immunity. |

## 7.2 Recommended Compliance

An OCP NIC 3.0 card is recommended to meet below compliance requirements.

### 7.2.1 Recommended Environmental Compliance

- **Halogen Free:** IEC 61249-2-21 Definition of halogen free: 900ppm for Bromine or Chlorine, or 1500ppm combined total halogens.
- **Arsenic:** 1000 ppm (or 0.1% by weight)

- **Emerging: US Conflict Minerals law: section 1502 of the Dodd-Frank Act** requires companies using tin, tantalum, tungsten, and gold (“3TG”) in their products to verify and disclose the mineral source. While this does not apply to products that are used to provide services, such as Infrastructure hardware products, the OCP NIC Subgroup is considering voluntarily reporting of this information.

#### 7.2.2 Recommended EMC Compliance

- 10dB margin to FCC sub-part 15 b class A emission requirements as specified in Section 7.1.2.

## 8 Revision History

| Author               | Description   | Revision | Date       |
|----------------------|---|----------|------------|
| OCP NIC 3.0 Subgroup | Initial public review.  | 0.70     | 01/25/2018 |
| OCP NIC 3.0 Subgroup | <ul style="list-style-type: none"> <li>- Implemented comments from 0.70 review.</li> <li>- LED implementation updated.</li> <li>- Gold finger lengths updated. All pins are full length except for PCIe TX/RX, REFCLKS and PRSNT pins.</li> </ul>   | 0.71     | 02/06/2018 |
| OCP NIC 3.0 Subgroup | <ul style="list-style-type: none"> <li>- Updates to Section 4.x per the working group session.</li> </ul>   | 0.72     | 02/21/2018 |
| OCP NIC 3.0 Subgroup | <ul style="list-style-type: none"> <li>- Change NC-SI Over RBT RXD/TXD pins to a pull-up instead of a pull down.</li> <li>- Update power sequencing diagram. REFCLK is disabled before silicon transitions to AUX Power Mode.</li> <li>- Merge pinout sections 3.4 and 3.5 together for structural clarity.</li> <li>- Add text to gate WAKE# signal on AUX_PWR_GOOD (internal) assertion; updated diagrams with WAKE# signals to reflect implementation.</li> <li>- Add initial signal integrity outline to document (WIP)</li> <li>- Add Initial draft of the Shock and Vibration, and Dye and Pull test requirements.</li> <li>- Rearrange Section 2 for structure; changed section name to Mechanical Card Form Factor</li> <li>- Move non-NIC use cases to Section 1.5.</li> <li>- Moved Port numbering and LED definitions to Section 3.8.</li> <li>- Add secondary side LED placement for 4x SFP and 2x QSFP implementations in Section 3.8.</li> <li>- Revised labeling section (Section 2.9).</li> <li>- Optimize the scan chain LED bit stream for dual port applications.</li> <li>- Add SLOT_ID[1]. Updated text and diagrams for mapping SLOT_ID[1:0] to Package ID[2:0] and FRU EEPROM A[2:0] fields.</li> <li>- Reduce ID Mode power consumption on +12V_EDGE</li> </ul> | 0.73     | 05/01/2018 |
| OCP NIC 3.0 Subgroup | <ul style="list-style-type: none"> <li>- Text clean up. All minor / generally agreed upon items within the OCP NIC 3.0 Workgroup have been accepted.</li> <li>- Clarify PCIe bifurcation is on a per-slot basis. Add 1x32 and 2x16 implementation examples for a Large Form Factor card.</li> <li>- Removed reference to a x24 PCIe width LFF card from Table 5 – OCP NIC 3.0 Card Definitions.</li> <li>- Move SLOT_ID[1] to OCP_A6 for immediate power on indication of the card physical location for RBT and FRU EEPROM addressing. Updated RBT addressing and Scan Chain definition to match.</li> <li>- Updated diagrams and text in Section 6.x based on feedback from the OCP NIC 3.0 Thermal Workgroup.</li> <li>- Updated diagrams and text in Section 2.0 based on feedback received from the OCP NIC 3.0 Mechanical Workgroup.</li> </ul>   | 0.74     | 06/04/2018 |
| OCP NIC 3.0 Subgroup | 0v80 public release   | 0.80     | 06/04/2018 |
| OCP NIC 3.0 Subgroup | <p>0v81 public release. Changes are as follows:</p> <ul style="list-style-type: none"> <li>- Section 1.3 - Update Figure 1 with latest thumbscrew design.</li> <li>- Section 2.4.2 - Mechanical corrections to BOM items 5, 6A/B, 8 &amp; 11.</li> <li>- Section 3.4.3 - Add statement to isolate SMRST# if target device voltage is not powered from +3.3V_EDGE.</li> <li>- Section 3.4.4 – Clarified the RBT_ARB_IN and RBT_ARB_OUT pin descriptions.</li> </ul>  | 0.81     | 07/06/2018 |

|                      |  |      |            |
|----------------------|--|------|------------|
|                      | <ul style="list-style-type: none"> <li>- Section 3.4.4 - Clarified SLOT_ID[1:0] description and example diagrams; move SLOT_ID[1:0] isolation to NIC and use direct connection to FRU EEPROM.</li> <li>- Section 3.4.5 - DATA_IN bit PRSNTB[3:0] definition to optionally use pull up/down to match PRSNTB[3:0]# card edge connections.</li> <li>- Section 3.4.7 – Add USB 2.0 definition to the Primary Connector.</li> <li>- Section 3.4.8 – Add UART definition to the Secondary Connector.</li> <li>- Section 3.4.9 - Changed Miscellaneous pins to RFU[1:2] pins.</li> <li>- Section 3.8 - Clarified LED placement.</li> <li>- Section 3.9.x - Clarified ID-Aux and Aux-Main Power Mode transition requirements to prevent sampling health status pins until cards have fully entered into Aux and Main modes to prevent false indication.</li> <li>- Section 3.11 - Updated hot swap consideration text to highlight available hot swap mechanisms. Actual hot swap design is outside the scope of this specification.</li> <li>- Section 4 - Update MCTP Type management description.</li> <li>- Section 4.9 - Clarified the FRU EEPROM is directly connected to the card edge. No isolation is used for the FRU EEPROM.</li> </ul> |      |            |
| OCP NIC 3.0 Subgroup | <ul style="list-style-type: none"> <li>- Minor editorial changes.</li> <li>- Changed names to “SFF” and “LFF” when referencing the two board form-factors for uniformity.</li> <li>- Section 3.4.1 – Changed PERST[3:0]# to be asserted low until the platform is ready to bring cards out of reset.</li> <li>- Section 3.5.3 – Corrected typos in the PCIe Bifurcation Decoder (Table 31) for hosts that implement 4 x2 links on the first 8 lanes when using a 4 x4 OCP NIC 3.0 card.</li> <li>- Section 3.5.5.3 &amp; 3.5.5.4 – Corrected the BIF[2:0] values in the diagrams.</li> <li>- Section 3.7 – Corrected typos in the PCIe Bifurcation result and REFCLK mapping (Table 38 and Table 41) for single host/quad host cases with PCIe on the first 8 lanes. This change was due to propagating corrections from Table 31 from Section 3.5.3.</li> <li>- Section 3.8.3 – Changed faceplate LED placement for 2xQSFP to primary side.</li> <li>- Section 4.10.2 – Added FRU field to identify the card manageability type.</li> <li>- Section 5.3.4 – Removed subheadings for the PCIe test methodology. Replaced with reference text to the PCIe test specifications.</li> </ul>   | 0.82 | 08/03/2018 |