

CE EMC TEST REPORT

REPORT NO. : EC633006
MODEL NO. : AS5512-54X
RECEIVED DATE : Mar. 30, 2016
FINAL TESTED DATE : Apr. 15, 2016
ISSUED DATE : May 06, 2016

TEST STANDARD : EN 55032:2012/AC:2013, Class A
EN 61000-3-2:2014
EN 61000-3-3:2013
EN 55024:2010
AS/NZS CISPR 32:2013, Class A

APPLICANT : Accton Technology Corporation
ADDRESS : No. 1 Creation Rd., III, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.

MANUFACTURER : Accton Technology Corporation
ADDRESS : No. 1 Creation Rd., III, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.

ISSUED BY : SPORTON International Inc.
LAB ADDRESS : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- This test report is only applicable to European Community / Australia and New Zealand.



Testing Laboratory
1190

Table of Contents

| | |
|---|----------|
| VERIFICATION OF COMPLIANCE | 1 |
| 1. Summary of Test Results | 2 |
| 2. General Description of Equipment under Test..... | 4 |
| 3. Test Configuration of Equipment under Test..... | 5 |
| 4. General Information of Test..... | 11 |
| 5. Test of Conducted Emission | 12 |
| 6. Test of Radiated Emission..... | 24 |
| 7. Harmonics Test..... | 41 |
| 8. Voltage Fluctuations and Flicker Test..... | 44 |
| 9. General Performance Criteria Description of Immunity Test..... | 46 |
| 10. Electrostatic Discharge Immunity Test (ESD)..... | 47 |
| 11. Radio Frequency Electromagnetic Field Immunity Test (RS)..... | 69 |
| 12. Electrical Fast Transient/Burst Immunity Test (EFT/BURST) | 71 |
| 13. Surge Immunity Test | 75 |
| 14. Conducted Disturbances Induced by Radio-Frequency Field Immunity Test (CS)..... | 78 |
| 15. Power Frequency Magnetic Field Immunity Tests | 81 |
| 16. Voltage Dips and Voltage Interruptions Immunity Tests | 83 |
| 17. List of Measuring Equipment Used | 86 |
| 18. Uncertainty of Test Site | 89 |
| Appendix A. TEST PHOTOS | A1 ~ A27 |

History of This Test Report

| REPORT NO. | VERSION | ISSUED DATE | Description |
|------------|---------|--------------|-------------------------|
| EC633006 | Rev. 01 | May 06, 2016 | Initial issue of report |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

VERIFICATION OF COMPLIANCE

EQUIPMENT NAME : 48+6 ports, Layer 3 10Gigabit switch

BRAND NAME : Edge-corE

MODEL NO. : AS5512-54X

APPLICANT : Accton Technology Corporation

ADDRESS : No. 1 Creation Rd., III, Science-based Industrial
Park, Hsinchu 300, Taiwan, R.O.C.

FINAL TESTED DATE : Apr. 15, 2016

TEST STANDARD : EN 55032:2012/AC:2013, Class A

EN 61000-3-2:2014

EN 61000-3-3:2013

EN 55024:2010

AS/NZS CISPR 32:2013, Class A

I **HEREBY** DECLARE THAT:

The measurements shown in this test report were made in accordance with the procedures given in
EUROPEAN COUNCIL DIRECTIVE 2014/30/EU.

The above equipment has been tested by **SPORTON International Inc. LAB.**, and found compliance with the
requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT)
configurations represented herein are true and accurate accounts of the measurements of the sample's EMC
characteristics under the conditions specified in this report.


Sin Chang
SPORTON INTERNATIONAL INC.

1. Summary of Test Results

After estimating all the combination of every test mode, the result shown as below is the worst case.

The EUT has been tested according to the following specifications.

| EMISSION | | | |
|---|--|--------|--|
| Test Standard | Test Type | Result | Remarks |
| EN 55032:2012/AC:2013, Class A and AS/NZS CISPR 32:2013 Class A | AC Power Port Conducted emission test 150 kHz – 30 MHz | PASS | Meet minimum passing margin is -24.35dB at 24.1423MHz. |
| | Telecom Port Conducted emission test 150 kHz – 30 MHz | PASS | Meet minimum passing margin is -15.64dB at 0.8618MHz. |
| | Radiated emission test 30 MHz – 1,000 MHz @ 10 m 1,000 MHz – 6,000 MHz @ 3 m | PASS | Meet minimum passing margin is -8.93dB at 1000.00MHz. |
| EN 61000-3-2:2014 | Harmonic Current emission test | PASS | Meet the requirements. |
| EN 61000-3-3:2013 | Voltage Fluctuations and Flicker tests | PASS | Meet the requirements. |

| IMMUNITY (EN 55024:2010) | | |
|------------------------------------|---|-----------------------|
| Test Standard | Test Type | Pass Criterion |
| IEC 61000-4-2:2008 | Electrostatic discharge immunity test ± 2, 4 kV Contact Discharge ± 2, 4, 8 kV Air Discharge Standard Criterion B | A |
| IEC 61000-4-3:2006/A1:2007/A2:2010 | Radiated immunity test Frequency Range : 80 MHz to 1,000 MHz Electromagnetic field : 3 V/m (unmodulated, r.m.s) Amplitude modulated : 80 % AM (1 kHz) Standard Criterion A | A |
| IEC 61000-4-4:2012 | Electrical fast transient / burst immunity test AC ports 5/50 ns, ± 1 kV, 5 kHz I/O ports 5/50 ns, ± 0.5 kV, 5 kHz Standard Criterion B | A |
| IEC 61000-4-5:2014 | Surge immunity test AC ports (1.2/50 us) : line to line : ± 0.5, 1 kV line to earth : ± 0.5, 1, 2 kV Standard Criterion B | A (Note) |
| IEC 61000-4-6:2013 | Conducted immunity test Frequency Range : 150 kHz to 80 MHz Electromagnetic field : 3 V (unmodulated, r.m.s) Amplitude modulated : 80 % AM (1 kHz) Standard Criterion A | A |
| IEC 61000-4-8:2009 | Power frequency magnetic field immunity test 1 A/m, 50 Hz Standard Criterion A | A |
| IEC 61000-4-11:2004 | Voltage dips, short interruptions and voltage variations immunity tests 1. >95% reduction 10 ms (0.5 cycles) – Standard Criterion B | A |
| | 2. 30% reduction 500 ms (25 cycles) – Standard Criterion C | A |
| | 3. Interruption >95% reduction 5,000 ms (250 cycles) – Standard Criterion C | B |

Note : According to EN 55024 Table 2 description, the surge test of telecommunication/signal cable will be performed only when it's directly connected to outdoor cables; thus, indoor telecommunication/signal port isn't necessary to perform surge test.

2. General Description of Equipment under Test

| Product Detail | |
|----------------|--------------------------------------|
| Equipment Name | 48+6 ports, Layer 3 10Gigabit switch |
| Model No. | AS5512-54X |
| Brand Name | Edge-corE |
| Power Supply | From AC Power |

2.1. Feature of Equipment under Test

1. The difference of the ports of the EUT is shown as below:

| Port | Description |
|-------|-------------|
| 1~48 | 10GHz |
| 49~54 | 40GHz |

2. There are two sources of power, the detail information as following:

| Power source | Brand | Model No. | Fan | Rating |
|-----------------|-----------|--------------|-----|--|
| Main Source 1 | COMPUWARE | CPR-4011-4M1 | F2B | Input: 100-240V/6.0-3.0A/50-60Hz Output: +12V/33A |
| Main Source 2 | | CPR-4011-4M2 | B2F | Input: 100-240V/6.0-3.0A/50-60Hz Output: +12V/33A |
| Power source | Brand | P/N | Fan | Rating |
| Second Source 3 | 3Y POWER | YM-2401JDR | B2F | Input: 100-240Vac 50-60Hz 6.3A Output: +12V/33.3A |
| Second Source 4 | | YM-2401JAR | F2B | Input: 100-240Vac 50-60Hz 6.3A Output: +12V/33.3A |

3. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3. Test Configuration of Equipment under Test

3.1. Test Mode

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Conducted Emissions | |
|---|---|
| Test Mode | Description |
| 1 | Main source power 1 + left power (F2B) |
| 2 | Main source power 1 + right power (F2B) |
| Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode. | |
| 3 | Main source power 2 + left power (B2F) |
| 4 | Second source power 3 + left power (B2F) |
| 5 | Second source power 3 + right power (B2F) |
| Mode 5 has been evaluated to be the worst case between Mode 4~5, thus measurement for Mode 6 will follow this same test mode. | |
| 6 | Second source power 4 + right power (F2B) |
| Mode 1 and Mode 4 generated the worst test result, so it was recorded in this report. | |

| Disturbances at Telecommunication Ports | |
|--|---|
| Main source power 1 + left power (F2B) and Second source power 3 + left power (B2F) has been evaluated to be the worst case at Conducted Emissions test; thus, the measurement for Disturbances at Telecommunication Ports will follow this same test configuration. | |
| Test Mode | Description |
| 1 | Main source power 1 (F2B)-DAC Port 1:10Gbps |
| 2 | Main source power 1 (F2B)-DAC Port 49: 40Gbps |
| 3 | Main source power 1 (F2B)-LAN Port 1: 10Mbps |
| 4 | Main source power 1 (F2B)-LAN Port 1: 100Mbps |
| 5 | Main source power 1 (F2B)-LAN Port 1: 1Gbps |
| 6 | Second source power 3 (B2F)-DAC Port 1:10Gbps |
| 7 | Second source power 3 (B2F)-DAC Port 49: 40Gbps |
| Mode 3 has been evaluated to be the worst case between Mode 3~5, thus measurement for Mode 8 will follow this same test mode. | |
| 8 | Second source power 3 (B2F)-LAN Port 1: 10Mbps |
| Mode 1, Mode 2, Mode 3, Mode 6, Mode 7 and Mode 8 are worst test result among Mode 1 ~ Mode 8, and the test result of those six modes are selected to record in the test report. | |

| Radiated Emissions | |
|---|-----------------------------------|
| Test Mode | Description |
| 1 | EUT + Main source power 1 (F2B) |
| 2 | EUT + Second source power 3 (B2F) |
| 3 | EUT + Main source power 2 (B2F) |
| 4 | EUT + Second source power 4 (F2B) |
| <p>For Radiated Emission test below 1GHz: Mode 1 and Mode 2 generated the worst test result, so it was recorded in this report.</p> <p>For Radiated Emission test above 1GHz: Mode 2 and Mode 3 generated the worst test result, so it was recorded in this report.</p> | |

| Harmonic Current Emissions · Voltage Fluctuations and Flicker · ESD · RS and PFMF | |
|---|-----------------------------|
| Main source power (F2B) and Second source power (B2F) has been evaluated to be the worst case at Radiated Emissions test; thus, the measurement for EMS will follow this same test configuration. | |
| Test Mode | Description |
| 1 | Main source power 1 (F2B) |
| 2 | Second source power 3 (B2F) |

| EFT · Surge · CS and DIP | |
|---|---|
| Main source power (F2B) and Second source power (B2F) has been evaluated to be the worst case at Radiated Emissions test; thus, the measurement for EMS will follow this same test configuration. | |
| Test Mode | Description |
| 1 | Main source power 1 + left power (F2B) |
| 2 | Main source power 1 + right power (F2B) |
| 3 | Second source power 3 + left power (B2F) |
| 4 | Second source power 3 + right power (B2F) |

Note: The test configuration and test modes written in this test report are designated by the applicant.

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Support Unit | Brand | Model | FCC ID |
|---------------|-----------|-------------|--------|
| NB | DELL | E6430 | DoC |
| Flash disk3.0 | Transcend | 639205 7755 | DoC |

3.3. EUT Operation Condition

<For EMI Test>

For Conducted Emissions , Radiated Emissions Test:

During the test, the following programs under win 7 were executed:

The remote notebook executed "ping.exe" to link with the EUT to maintain the connection by LAN.

The remote notebook executed "Hyper Terminal " to maintain the connection with the EUT.

For Disturbances at Telecommunication Ports Test:

At the same time, the remote notebook executed "LAN TEST" to link with the EUT to traffic packet data generated software and keep 10% traffic load by LAN and DAC.

<For EMS Test>


During the test, the following programs under win 7 were executed:

The remote notebook executed "ping.exe" to link with the EUT to maintain the connection by LAN.

The remote notebook executed "Hyper Terminal " to maintain the connection with the EUT.


3.4. Connection Diagram of Test System

3.4.1. AC Power Line Conduction Emissions Test Configuration

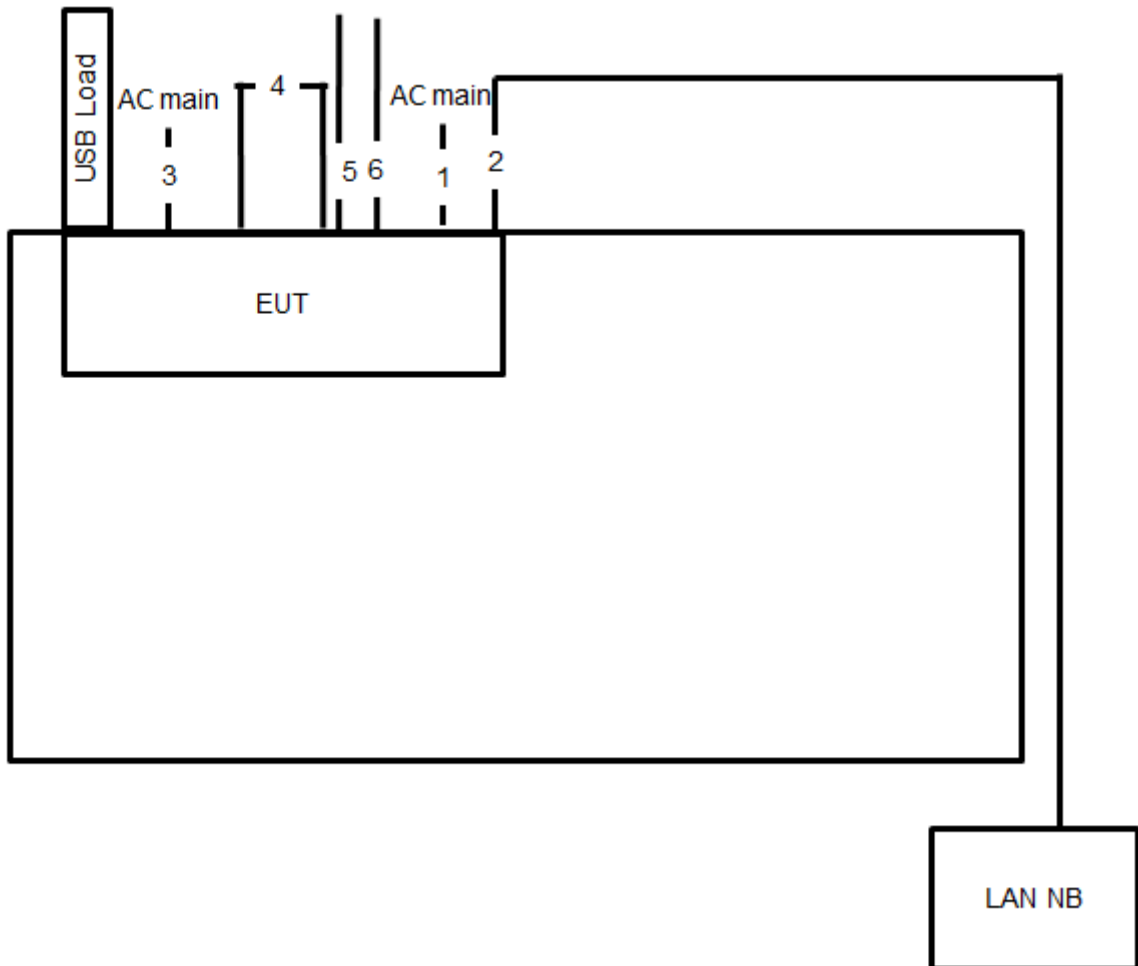

| Item | Connection | Shielded | Length |
|------|---------------|----------|--------|
| 1 | Power cable | No | 1.8m |
| 2 | RJ-45 cable | No | 10m |
| 3 | Power cable | No | 1.8m |
| 4 | DAC cable*27 | Yes | 5m |
| 5 | Console cable | Yes | 1.5m |
| 6 | Ground cable | No | 1.8m |

3.4.2. Radiation Emissions Test Configuration

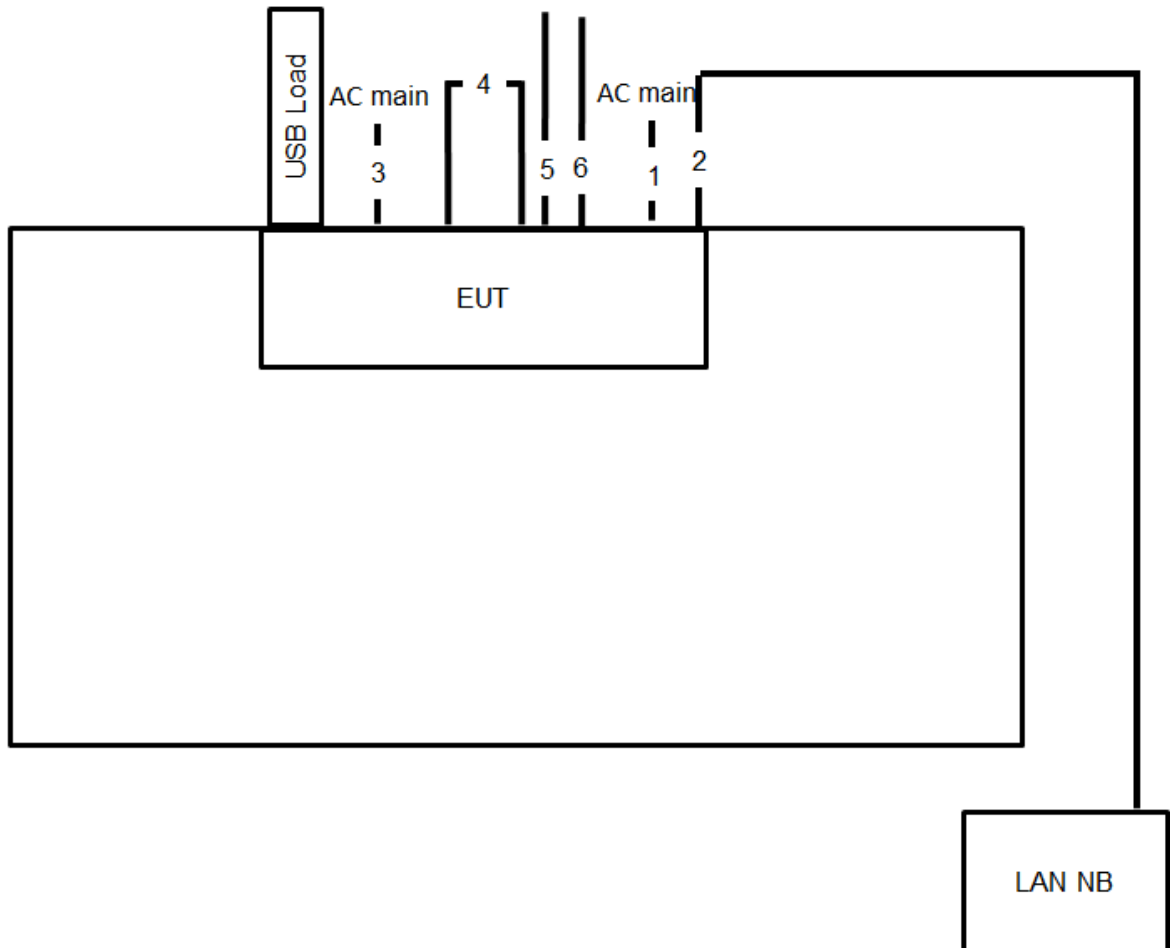

| Item | Connection | Shielded | Length |
|------|---------------|----------|--------|
| 1 | Power cable | No | 1.8m |
| 2 | RJ-45 cable | No | 10m |
| 3 | Power cable | No | 1.8m |
| 4 | DAC cable*27 | Yes | 5m |
| 5 | Console cable | Yes | 1.5m |
| 6 | Ground cable | No | 1.8m |

4. General Information of Test

4.1. Test Facility

<EMI>

Test Site Location : No.8, Lane 724, Bo-ai St., Jhubei City,
Hsinchu County 302, Taiwan, R.O.C.

TEL : 886-3-656-9065

FAX : 886-3-656-9085

Test Site No. : Conduction: CO01-CB
Radiation: 10CH01-CB

<EMS>

Test Site Location : No.8, Lane 724, Bo-ai St., Jhubei City,
Hsinchu County 302, Taiwan, R.O.C.

TEL : 886-3-656-9065

FAX : 886-3-656-9085

4.2. Test Voltage

| Power Type | Test Voltage |
|-----------------|---------------|
| AC Power Supply | 230 V / 50 Hz |

4.3. Frequency Range Investigated

| EMI Test Items | Frequency Range |
|---|---------------------|
| Conducted emission test | 150 kHz to 30 MHz |
| Radiated emission test | 30 MHz to 6,000 MHz |
| EMS Test Items | Frequency Range |
| Radio frequency electromagnetic field immunity test | 80 MHz to 1,000 MHz |
| Conducted immunity test | 150 kHz to 80 MHz |

4.4. Test Distance

| Test Items | Test Distance |
|---|---------------|
| Radiated emission test below 1 GHz (30 MHz to 1,000 MHz) | 10 m |
| Radiated emission test above 1 GHz (1,000 MHz to 6,000 MHz) | 3 m |
| Radio frequency electromagnetic field immunity test | 3 m |

5. Test of Conducted Emission

5.1. Limit

5.1.1. Limit for AC power ports :

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5 | 79 | 66 |
| 0.5~30 | 73 | 60 |

5.1.2. Limit for Telecommunication ports :

| Frequency (MHz) | Voltage Limit (dBuV) | | Current Limit (dBuA) | |
|-----------------|----------------------|-------|----------------------|-------|
| | QP | AV | QP | AV |
| 0.15~0.5 | 97~87 | 84~74 | 53~43 | 40~30 |
| 0.5~30 | 87 | 74 | 43 | 30 |


5.2. Description of Major Test Instruments

| Test Receiver | Agilent N9038A |
|-----------------|----------------|
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |

5.3. Test Procedures

- The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- Connect Telecommunication port to ISN (Impedance Stabilization Network).
- All the support units are connect to the other LISN.
- The LISN provides 50 Ω coupling impedance for the measuring instrument.
- The CISPR states that a 50 Ω , 50 μ H LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.


5.4. Typical Test Setup Layout of Conducted Emission and disturbances at telecommunication ports

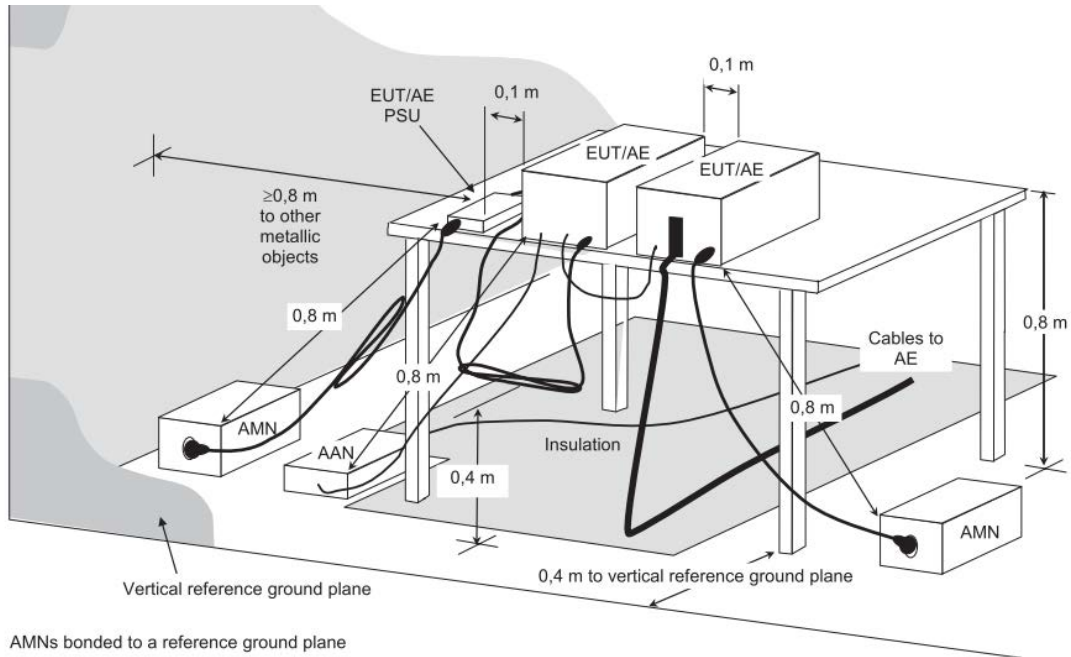

5.5. Test Result of AC Power Ports


| | | | |
|--|-------------|------------------------|--------------------|
| Temperature | 20°C | Humidity | 60% |
| Test Engineer | Deven Huang | Frequency Range | 0.15 MHz to 30 MHz |
| Test Mode | Mode 1 | | |
| <ul style="list-style-type: none"> ▪ Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level ▪ Margin = - Limit + (Read Level + LISN Factor + Cable Loss) ▪ All emissions not reported here are more than 10 dB below the prescribed limit. ▪ The test was passed at the minimum margin that marked by a frame in the following table | | | |

Line

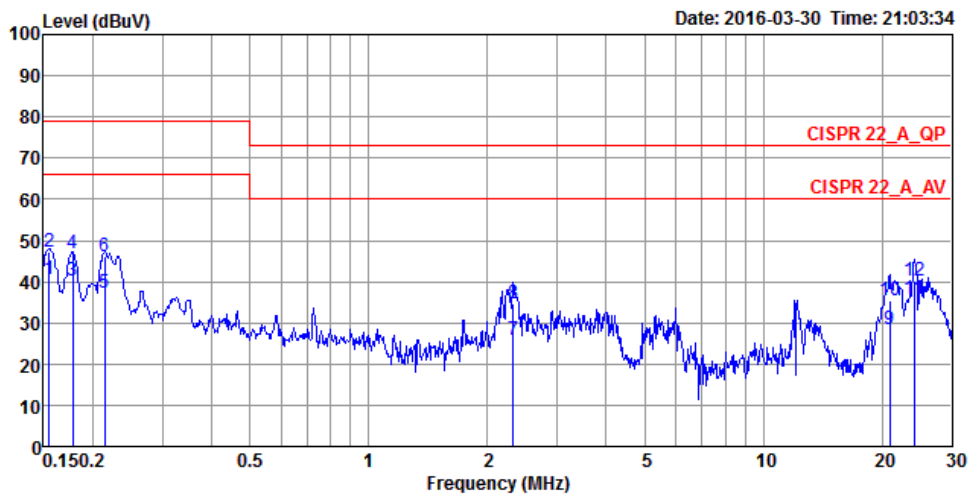

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | | |
| 1 | 0.1548 | 40.58 | -25.42 | 66.00 | 30.54 | 10.02 | 0.02 | LINE | Average |
| 2 | 0.1548 | 47.28 | -31.72 | 79.00 | 37.24 | 10.02 | 0.02 | LINE | QP |
| 3 | 0.1777 | 40.15 | -25.85 | 66.00 | 30.21 | 9.92 | 0.02 | LINE | Average |
| 4 | 0.1777 | 46.88 | -32.12 | 79.00 | 36.94 | 9.92 | 0.02 | LINE | QP |
| 5 | 0.2139 | 37.12 | -28.88 | 66.00 | 27.18 | 9.92 | 0.02 | LINE | Average |
| 6 | 0.2139 | 46.30 | -32.70 | 79.00 | 36.36 | 9.92 | 0.02 | LINE | QP |
| 7 | 2.3213 | 25.71 | -34.29 | 60.00 | 15.69 | 9.96 | 0.06 | LINE | Average |
| 8 | 2.3213 | 34.53 | -38.47 | 73.00 | 24.51 | 9.96 | 0.06 | LINE | QP |
| 9 | 20.9243 | 28.45 | -31.55 | 60.00 | 17.86 | 10.33 | 0.26 | LINE | Average |
| 10 | 20.9243 | 35.36 | -37.64 | 73.00 | 24.77 | 10.33 | 0.26 | LINE | QP |
| 11 | 24.1423 | 35.65 | -24.35 | 60.00 | 24.96 | 10.42 | 0.27 | LINE | Average |
| 12 | 24.1423 | 40.10 | -32.90 | 73.00 | 29.41 | 10.42 | 0.27 | LINE | QP |


Neutral

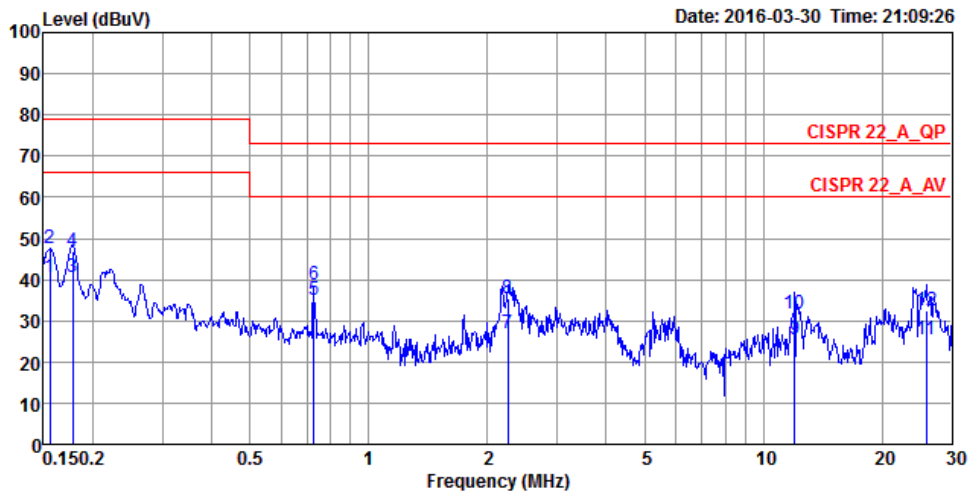

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | | |
| 1 | 0.1557 | 40.51 | -25.49 | 66.00 | 30.47 | 10.02 | 0.02 | NEUTRAL | Average |
| 2 | 0.1557 | 47.44 | -31.56 | 79.00 | 37.40 | 10.02 | 0.02 | NEUTRAL | QP |
| 3 | 0.1777 | 40.41 | -25.59 | 66.00 | 30.47 | 9.92 | 0.02 | NEUTRAL | Average |
| 4 | 0.1777 | 47.02 | -31.98 | 79.00 | 37.08 | 9.92 | 0.02 | NEUTRAL | QP |
| 5 | 0.7274 | 34.97 | -25.03 | 60.00 | 25.00 | 9.93 | 0.04 | NEUTRAL | Average |
| 6 | 0.7274 | 38.72 | -34.28 | 73.00 | 28.75 | 9.93 | 0.04 | NEUTRAL | QP |
| 7 | 2.2486 | 27.00 | -33.00 | 60.00 | 16.98 | 9.96 | 0.06 | NEUTRAL | Average |
| 8 | 2.2486 | 35.40 | -37.60 | 73.00 | 25.38 | 9.96 | 0.06 | NEUTRAL | QP |
| 9 | 11.9962 | 25.58 | -34.42 | 60.00 | 15.15 | 10.18 | 0.25 | NEUTRAL | Average |
| 10 | 11.9962 | 31.59 | -41.41 | 73.00 | 21.16 | 10.18 | 0.25 | NEUTRAL | QP |
| 11 | 25.8638 | 25.32 | -34.68 | 60.00 | 14.59 | 10.46 | 0.27 | NEUTRAL | Average |
| 12 | 25.8638 | 32.30 | -40.70 | 73.00 | 21.57 | 10.46 | 0.27 | NEUTRAL | QP |


| | | | |
|--|-------------|------------------------|--------------------|
| Temperature | 20°C | Humidity | 60% |
| Test Engineer | Deven Huang | Frequency Range | 0.15 MHz to 30 MHz |
| Test Mode | Mode 4 | | |
| <ul style="list-style-type: none"> Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level Margin = - Limit + (Read Level + LISN Factor + Cable Loss) All emissions not reported here are more than 10 dB below the prescribed limit. The test was passed at the minimum margin that marked by a frame in the following table | | | |

Line

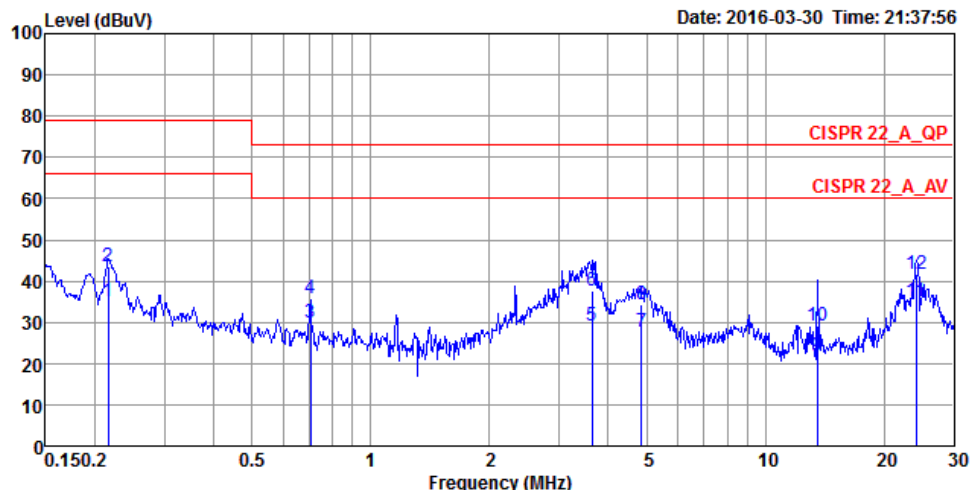

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | | |
| 1 | 0.2162 | 35.03 | -30.97 | 66.00 | 25.09 | 9.92 | 0.02 | LINE | Average |
| 2 | 0.2162 | 43.60 | -35.40 | 79.00 | 33.66 | 9.92 | 0.02 | LINE | QP |
| 3 | 0.7047 | 29.97 | -30.03 | 60.00 | 20.00 | 9.93 | 0.04 | LINE | Average |
| 4 | 0.7047 | 35.69 | -37.31 | 73.00 | 25.72 | 9.93 | 0.04 | LINE | QP |
| 5 | 3.6418 | 29.17 | -30.83 | 60.00 | 19.13 | 9.98 | 0.06 | LINE | Average |
| 6 | 3.6418 | 37.76 | -35.24 | 73.00 | 27.72 | 9.98 | 0.06 | LINE | QP |
| 7 | 4.8480 | 27.72 | -32.28 | 60.00 | 17.62 | 10.01 | 0.09 | LINE | Average |
| 8 | 4.8480 | 34.41 | -38.59 | 73.00 | 24.31 | 10.01 | 0.09 | LINE | QP |
| 9 | 13.5509 | 21.93 | -38.07 | 60.00 | 11.47 | 10.21 | 0.25 | LINE | Average |
| 10 | 13.5509 | 28.99 | -44.01 | 73.00 | 18.53 | 10.21 | 0.25 | LINE | QP |
| 11 | 24.1423 | 35.12 | -24.88 | 60.00 | 24.43 | 10.42 | 0.27 | LINE | Average |
| 12 | 24.1423 | 41.57 | -31.43 | 73.00 | 30.88 | 10.42 | 0.27 | LINE | QP |


Neutral

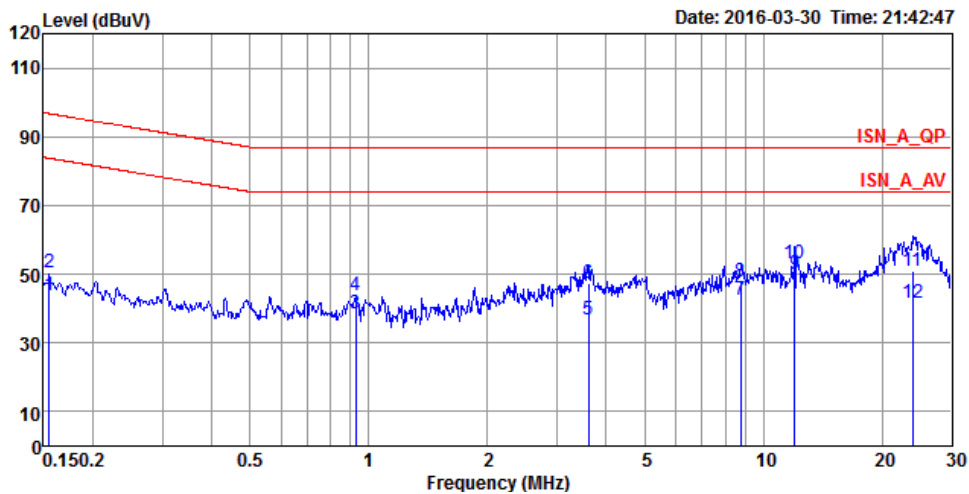

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | | |
| 1 | 0.1548 | 43.71 | -40.03 | 83.74 | 33.53 | 10.16 | 0.02 | | Average |
| 2 | 0.1548 | 50.63 | -46.11 | 96.74 | 40.45 | 10.16 | 0.02 | | QP |
| 3 | 0.9282 | 38.34 | -35.66 | 74.00 | 28.61 | 9.68 | 0.05 | | Average |
| 4 | 0.9282 | 43.88 | -43.12 | 87.00 | 34.15 | 9.68 | 0.05 | | QP |
| 5 | 3.6034 | 36.73 | -37.27 | 74.00 | 27.08 | 9.59 | 0.06 | | Average |
| 6 | 3.6034 | 47.38 | -39.62 | 87.00 | 37.73 | 9.59 | 0.06 | | QP |
| 7 | 8.7757 | 42.40 | -31.60 | 74.00 | 32.63 | 9.57 | 0.20 | | Average |
| 8 | 8.7757 | 47.73 | -39.27 | 87.00 | 37.96 | 9.57 | 0.20 | | QP |
| 9 | 11.9962 | 50.16 | -23.84 | 74.00 | 40.28 | 9.63 | 0.25 | | Average |
| 10 | 11.9962 | 53.26 | -33.74 | 87.00 | 43.38 | 9.63 | 0.25 | | QP |
| 11 | 23.8878 | 50.78 | -23.22 | 74.00 | 40.54 | 9.97 | 0.27 | | Average |
| 12 | 23.8878 | 41.44 | -45.56 | 87.00 | 31.20 | 9.97 | 0.27 | | QP |


5.6. Test Result of Telecommunication Ports

| | | | |
|--|----------------------------|------------------------|--------------------|
| Temperature | 20°C | Humidity | 60% |
| Test Engineer | Deven Huang | Frequency Range | 0.15 MHz to 30 MHz |
| Test Mode | Mode 1 / DAC Port 1:10Gbps | | |
| <ul style="list-style-type: none"> ▪ Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level ▪ Margin = - Limit + (Read Level + LISN Factor + Cable Loss) ▪ All emissions not reported here are more than 10 dB below the prescribed limit. ▪ The test was passed at the minimum margin that marked by a frame in the following table | | | |

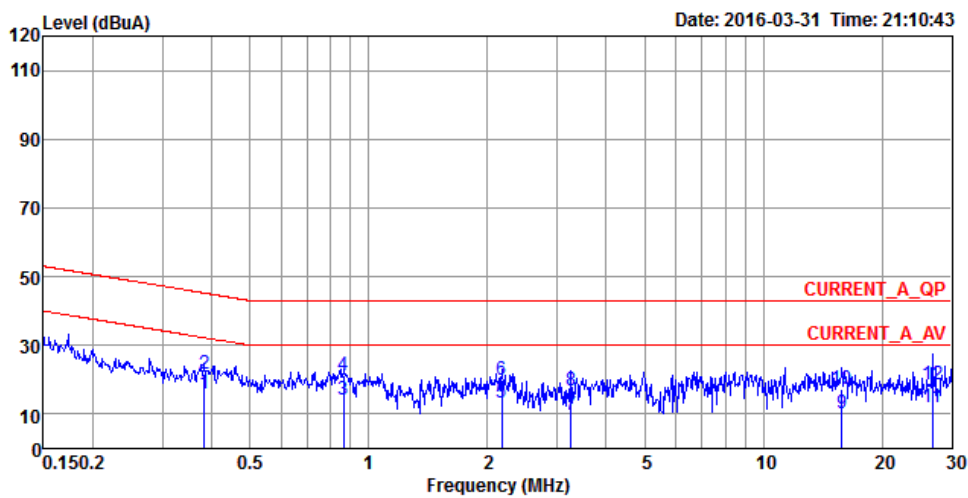


| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
| | MHz | dBuA | dB | dBuA | dBuA | dB | dB | | |
| 1 | 0.3832 | 15.92 | -16.31 | 32.23 | -18.11 | 33.99 | 0.04 | | Average |
| 2 | 0.3832 | 21.73 | -23.50 | 45.23 | -12.30 | 33.99 | 0.04 | | QP |
| 3 | 0.8618 | 14.38 | -15.64 | 30.02 | -19.62 | 33.96 | 0.04 | | Average |
| 4 | 0.8618 | 21.21 | -21.81 | 43.02 | -12.79 | 33.96 | 0.04 | | QP |
| 5 | 2.1783 | 13.20 | -16.82 | 30.02 | -20.80 | 33.94 | 0.06 | | Average |
| 6 | 2.1783 | 19.88 | -23.14 | 43.02 | -14.12 | 33.94 | 0.06 | | QP |
| 7 | 3.2583 | 9.96 | -20.06 | 30.02 | -24.04 | 33.94 | 0.06 | | Average |
| 8 | 3.2583 | 16.81 | -26.21 | 43.02 | -17.19 | 33.94 | 0.06 | | QP |
| 9 | 15.8014 | 10.31 | -19.71 | 30.02 | -23.86 | 33.91 | 0.26 | | Average |
| 10 | 15.8014 | 17.20 | -25.82 | 43.02 | -16.97 | 33.91 | 0.26 | | QP |
| 11 | 26.8411 | 11.85 | -18.17 | 30.02 | -22.47 | 34.05 | 0.27 | | Average |
| 12 | 26.8411 | 18.47 | -24.55 | 43.02 | -15.85 | 34.05 | 0.27 | | QP |

| | | | |
|--|------------------------------|------------------------|--------------------|
| Temperature | 20°C | Humidity | 60% |
| Test Engineer | Deven Huang | Frequency Range | 0.15 MHz to 30 MHz |
| Test Mode | Mode 2 / DAC Port 49: 40Gbps | | |
| <ul style="list-style-type: none"> Corrected Reading (dBUV) = LISN Factor + Cable Loss + Read Level = Level Margin = - Limit + (Read Level + LISN Factor + Cable Loss) All emissions not reported here are more than 10 dB below the prescribed limit. The test was passed at the minimum margin that marked by a frame in the following table | | | |

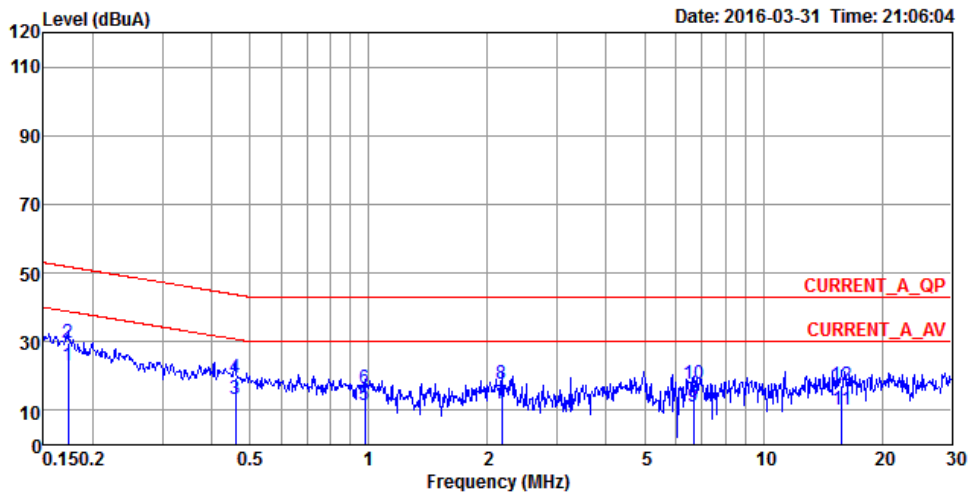


| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
| | MHz | dBuA | dB | dBuA | dBuA | dB | dB | | |
| 1 | 0.1731 | 22.85 | -15.98 | 38.83 | -11.21 | 34.04 | 0.02 | | Average |
| 2 | 0.1731 | 29.71 | -22.12 | 51.83 | -4.35 | 34.04 | 0.02 | | QP |
| 3 | 0.4588 | 13.49 | -17.25 | 30.74 | -20.48 | 33.93 | 0.04 | | Average |
| 4 | 0.4588 | 19.28 | -24.46 | 43.74 | -14.69 | 33.93 | 0.04 | | QP |
| 5 | 0.9787 | 11.59 | -18.43 | 30.02 | -22.43 | 33.97 | 0.05 | | Average |
| 6 | 0.9787 | 16.27 | -26.75 | 43.02 | -17.75 | 33.97 | 0.05 | | QP |
| 7 | 2.1783 | 12.13 | -17.89 | 30.02 | -21.87 | 33.94 | 0.06 | | Average |
| 8 | 2.1783 | 17.90 | -25.12 | 43.02 | -16.10 | 33.94 | 0.06 | | QP |
| 9 | 6.6624 | 11.29 | -18.73 | 30.02 | -22.77 | 33.94 | 0.12 | | Average |
| 10 | 6.6624 | 17.81 | -25.21 | 43.02 | -16.25 | 33.94 | 0.12 | | QP |
| 11 | 15.8014 | 10.40 | -19.62 | 30.02 | -23.77 | 33.91 | 0.26 | | Average |
| 12 | 15.8014 | 17.07 | -25.95 | 43.02 | -17.10 | 33.91 | 0.26 | | QP |

| | | | |
|--|-----------------------------|------------------------|--------------------|
| Temperature | 20°C | Humidity | 60% |
| Test Engineer | Deven Huang | Frequency Range | 0.15 MHz to 30 MHz |
| Test Mode | Mode 3 / LAN Port 1: 10Mbps | | |
| <ul style="list-style-type: none"> Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level Margin = - Limit + (Read Level + LISN Factor + Cable Loss) All emissions not reported here are more than 10 dB below the prescribed limit. The test was passed at the minimum margin that marked by a frame in the following table | | | |

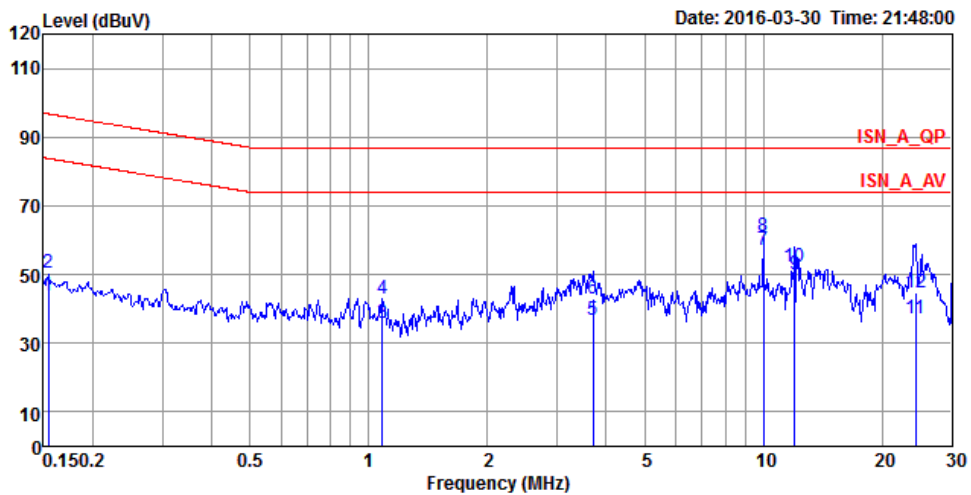


| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | | |
| 1 | 0.1540 | 43.81 | -39.97 | 83.78 | 33.62 | 10.17 | 0.02 | | Average |
| 2 | 0.1540 | 50.64 | -46.14 | 96.78 | 40.45 | 10.17 | 0.02 | | QP |
| 3 | 1.0824 | 36.03 | -37.97 | 74.00 | 26.32 | 9.66 | 0.05 | | Average |
| 4 | 1.0824 | 42.89 | -44.11 | 87.00 | 33.18 | 9.66 | 0.05 | | QP |
| 5 | 3.7001 | 36.57 | -37.43 | 74.00 | 26.92 | 9.59 | 0.06 | | Average |
| 6 | 3.7001 | 43.06 | -43.94 | 87.00 | 33.41 | 9.59 | 0.06 | | QP |
| 7 | 10.0000 | 57.11 | -16.89 | 74.00 | 47.29 | 9.57 | 0.25 | | Average |
| 8 | 10.0000 | 61.11 | -25.89 | 87.00 | 51.29 | 9.57 | 0.25 | | QP |
| 9 | 11.9962 | 50.06 | -23.94 | 74.00 | 40.18 | 9.63 | 0.25 | | Average |
| 10 | 11.9962 | 52.29 | -34.71 | 87.00 | 42.41 | 9.63 | 0.25 | | QP |
| 11 | 24.2706 | 37.10 | -36.90 | 74.00 | 26.84 | 9.99 | 0.27 | | Average |
| 12 | 24.2706 | 44.74 | -42.26 | 87.00 | 34.48 | 9.99 | 0.27 | | QP |

| | | | |
|--|----------------------------|------------------------|--------------------|
| Temperature | 20°C | Humidity | 60% |
| Test Engineer | Deven Huang | Frequency Range | 0.15 MHz to 30 MHz |
| Test Mode | Mode 6 / DAC Port 1:10Gbps | | |
| <ul style="list-style-type: none"> Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level Margin = - Limit + (Read Level + LISN Factor + Cable Loss) All emissions not reported here are more than 10 dB below the prescribed limit. The test was passed at the minimum margin that marked by a frame in the following table | | | |

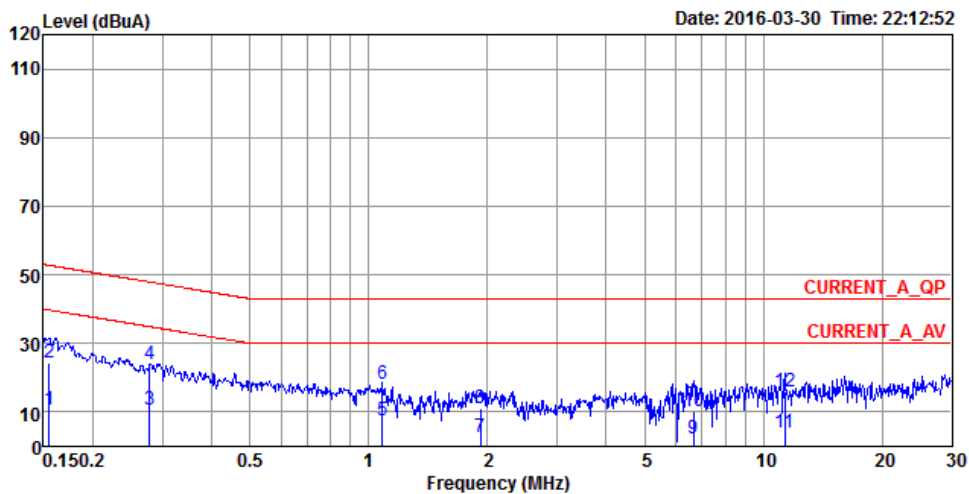


| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
| | MHz | dBuA | dB | dBuA | dBuA | dB | dB | | |
| 1 | 0.1548 | 10.66 | -29.10 | 39.76 | -23.42 | 34.06 | 0.02 | | Average |
| 2 | 0.1548 | 24.43 | -28.33 | 52.76 | -9.65 | 34.06 | 0.02 | | QP |
| 3 | 0.2788 | 10.80 | -24.07 | 34.87 | -23.24 | 34.00 | 0.04 | | Average |
| 4 | 0.2788 | 23.70 | -24.17 | 47.87 | -10.34 | 34.00 | 0.04 | | QP |
| 5 | 1.0824 | 7.34 | -22.68 | 30.02 | -26.68 | 33.97 | 0.05 | | Average |
| 6 | 1.0824 | 18.15 | -24.87 | 43.02 | -15.87 | 33.97 | 0.05 | | QP |
| 7 | 1.9182 | 2.53 | -27.49 | 30.02 | -31.47 | 33.94 | 0.06 | | Average |
| 8 | 1.9182 | 11.25 | -31.77 | 43.02 | -22.75 | 33.94 | 0.06 | | QP |
| 9 | 6.6624 | 2.16 | -27.86 | 30.02 | -31.90 | 33.94 | 0.12 | | Average |
| 10 | 6.6624 | 10.00 | -33.02 | 43.02 | -24.06 | 33.94 | 0.12 | | QP |
| 11 | 11.3170 | 3.86 | -26.16 | 30.02 | -30.31 | 33.92 | 0.25 | | Average |
| 12 | 11.3170 | 15.74 | -27.28 | 43.02 | -18.43 | 33.92 | 0.25 | | QP |

| | | | |
|--|------------------------------|------------------------|--------------------|
| Temperature | 20°C | Humidity | 60% |
| Test Engineer | Deven Huang | Frequency Range | 0.15 MHz to 30 MHz |
| Test Mode | Mode 7 / DAC Port 49: 40Gbps | | |
| <ul style="list-style-type: none"> ▪ Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level ▪ Margin = - Limit + (Read Level + LISN Factor + Cable Loss) ▪ All emissions not reported here are more than 10 dB below the prescribed limit. ▪ The test was passed at the minimum margin that marked by a frame in the following table | | | |

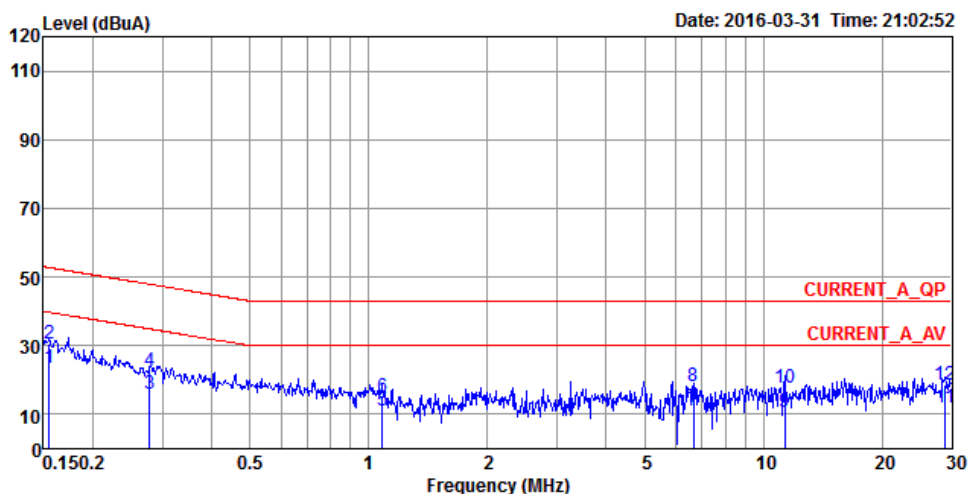

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
| | MHz | dBuA | dB | dBuA | dBuA | dB | dB | | |
| 1 | 0.1548 | 23.60 | -16.16 | 39.76 | -10.48 | 34.06 | 0.02 | | Average |
| 2 | 0.1548 | 30.41 | -22.35 | 52.76 | -3.67 | 34.06 | 0.02 | | QP |
| 3 | 0.2788 | 15.78 | -19.09 | 34.87 | -18.26 | 34.00 | 0.04 | | Average |
| 4 | 0.2788 | 22.39 | -25.48 | 47.87 | -11.65 | 34.00 | 0.04 | | QP |
| 5 | 1.0824 | 11.24 | -18.78 | 30.02 | -22.78 | 33.97 | 0.05 | | Average |
| 6 | 1.0824 | 15.11 | -27.91 | 43.02 | -18.91 | 33.97 | 0.05 | | QP |
| 7 | 6.6624 | 11.17 | -18.85 | 30.02 | -22.89 | 33.94 | 0.12 | | Average |
| 8 | 6.6624 | 18.20 | -24.82 | 43.02 | -15.86 | 33.94 | 0.12 | | QP |
| 9 | 11.3170 | 10.74 | -19.28 | 30.02 | -23.43 | 33.92 | 0.25 | | Average |
| 10 | 11.3170 | 17.50 | -25.52 | 43.02 | -16.67 | 33.92 | 0.25 | | QP |
| 11 | 28.9077 | 12.05 | -17.97 | 30.02 | -22.33 | 34.10 | 0.28 | | Average |
| 12 | 28.9077 | 18.75 | -24.27 | 43.02 | -15.63 | 34.10 | 0.28 | | QP |

| | | | |
|--|-----------------------------|------------------------|--------------------|
| Temperature | 20°C | Humidity | 60% |
| Test Engineer | Deven Huang | Frequency Range | 0.15 MHz to 30 MHz |
| Test Mode | Mode 8 / LAN Port 1: 10Mbps | | |
| <ul style="list-style-type: none"> Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level Margin = - Limit + (Read Level + LISN Factor + Cable Loss) All emissions not reported here are more than 10 dB below the prescribed limit. The test was passed at the minimum margin that marked by a frame in the following table | | | |

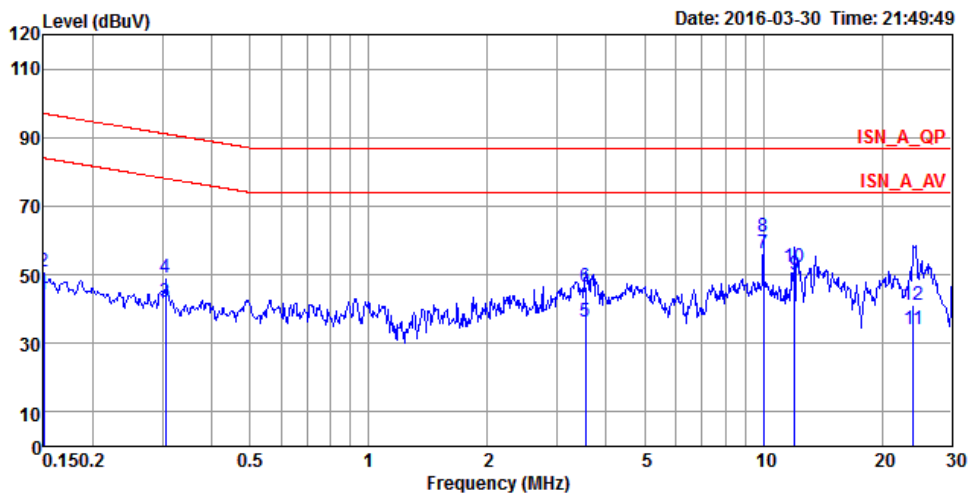

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | | |
| 1 | 0.1500 | 44.11 | -39.89 | 84.00 | 33.91 | 10.18 | 0.02 | | Average |
| 2 | 0.1500 | 50.87 | -46.13 | 97.00 | 40.67 | 10.18 | 0.02 | | QP |
| 3 | 0.3051 | 42.24 | -35.86 | 78.10 | 32.31 | 9.89 | 0.04 | | Average |
| 4 | 0.3051 | 49.14 | -41.96 | 91.10 | 39.21 | 9.89 | 0.04 | | QP |
| 5 | 3.5466 | 36.37 | -37.63 | 74.00 | 26.72 | 9.59 | 0.06 | | Average |
| 6 | 3.5466 | 46.38 | -40.62 | 87.00 | 36.73 | 9.59 | 0.06 | | QP |
| 7 | 10.0000 | 56.24 | -17.76 | 74.00 | 46.42 | 9.57 | 0.25 | | Average |
| 8 | 10.0000 | 61.26 | -25.74 | 87.00 | 51.44 | 9.57 | 0.25 | | QP |
| 9 | 11.9962 | 50.03 | -23.97 | 74.00 | 40.15 | 9.63 | 0.25 | | Average |
| 10 | 11.9962 | 52.36 | -34.64 | 87.00 | 42.48 | 9.63 | 0.25 | | QP |
| 11 | 24.0148 | 33.93 | -40.07 | 74.00 | 23.68 | 9.98 | 0.27 | | Average |
| 12 | 24.0148 | 41.39 | -45.61 | 87.00 | 31.14 | 9.98 | 0.27 | | QP |

6. Test of Radiated Emission

6.1. Limit

Radiated Emission below 1 GHz test at 10 m:

| Frequency (MHz) | QP (dBuV/m) |
|-----------------|-------------|
| 30~230 | 40 |
| 230~1,000 | 47 |

Radiated Emission above 1 GHz test at 3 m:

| Frequency (MHz) | PK (dBuV/m) | AV (dBuV/m) |
|-----------------|-------------|-------------|
| 1,000~3,000 | 76 | 56 |
| 3,000~6,000 | 80 | 60 |

6.2. Description of Major Test Instruments

6.2.1. 30 MHz ~ 1,000 MHz

| Amplifier | Agilent 8447D |
|--------------|------------------|
| RF Gain | 25 dB |
| Signal Input | 9 kHz to 1.3 GHz |

| Spectrum Analyzer | R&S FSV30 |
|----------------------|-----------------|
| Start Frequency | 30 MHz |
| Stop Frequency | 1000 MHz |
| Resolution Bandwidth | 120 kHz |
| Signal Input | 9 kHz to 30 GHz |

| Test Receiver | R&S ESCI |
|----------------------|----------------|
| Start Frequency | 30 MHz |
| Stop Frequency | 1000 MHz |
| Resolution Bandwidth | 120 kHz |
| Signal Input | 9 kHz to 3 GHz |

6.2.2. Above 1 GHz

| | |
|------------------|----------------------|
| Amplifier | Agilent 8449B |
| RF Gain | 35 dB |
| Signal Input | 1 GHz to 26.5 GHz |

| | |
|--------------------------|----------------------|
| Spectrum Analyzer | R&S FSV30 |
| Start Frequency | 1 GHz |
| Stop Frequency | 6 GHz |
| Resolution Bandwidth | 1 MHz |
| Signal Input | 9 kHz to 30 GHz |


6.3. Test Procedures**<Below 1 GHz>:**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.


<Above 1 GHz>:

- a. Same test set up as below 1 GHz radiated testing.
- b. The EUT was set 3 meters from the interference-receiving antenna which was mounted on the top of a variable height antenna tower.
- c. There should be absorber placed between the EUT and Antenna and its located size should let the test site meet CISPR16-1-4 requirement.
- d. The table was rotated 360 degrees to determine the position of the highest radiation.
- e. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- f. Set the DRG Horn Antenna at 1M height, then run the turn table to get the maximum noise reading from Horizontal and Vertical polarity separately.
- g. When EUT locating on the turn-table, and its height is over 172 cm (Antenna's 3dB beam width of 6 GHz is 27°), the DRG Horn Antenna must be raised up and descended down, then turning around the turn-table to get the maximum noise reading of the Horizontal and Vertical polarity separately. Note the maximum raise up height is same as the top of EUT.
- h. If emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


6.4. Typical Test Setup Layout of Radiated Emission

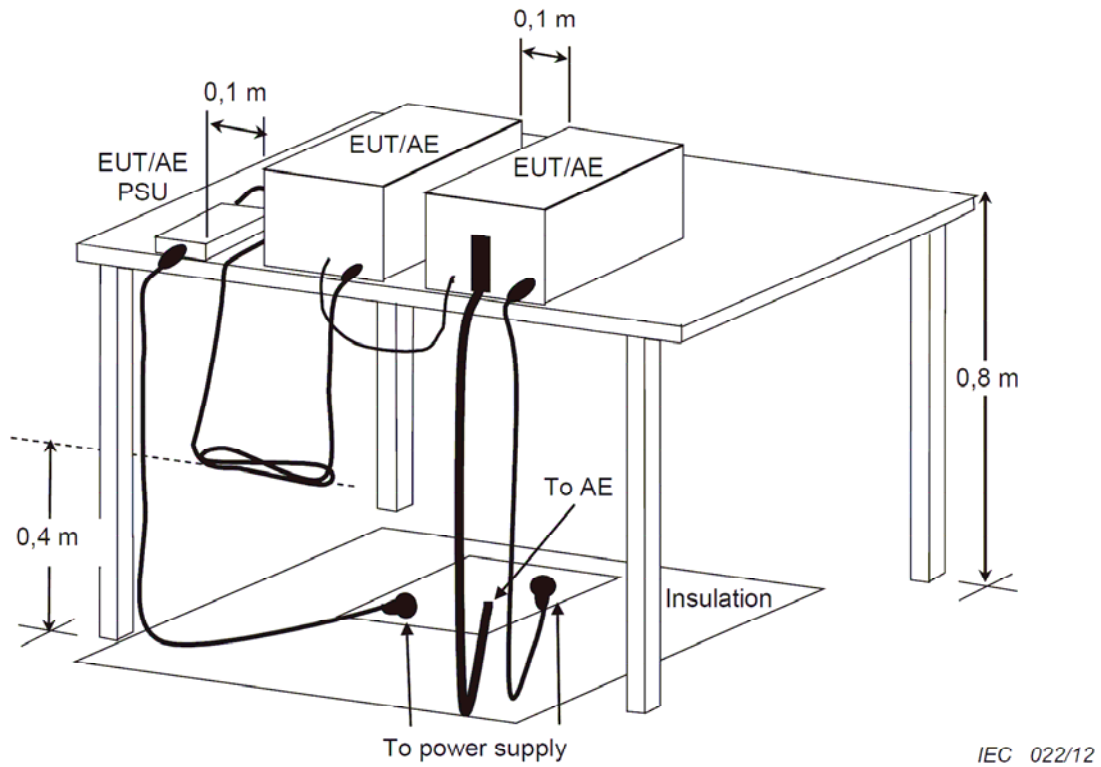

<Below 1 GHz>:

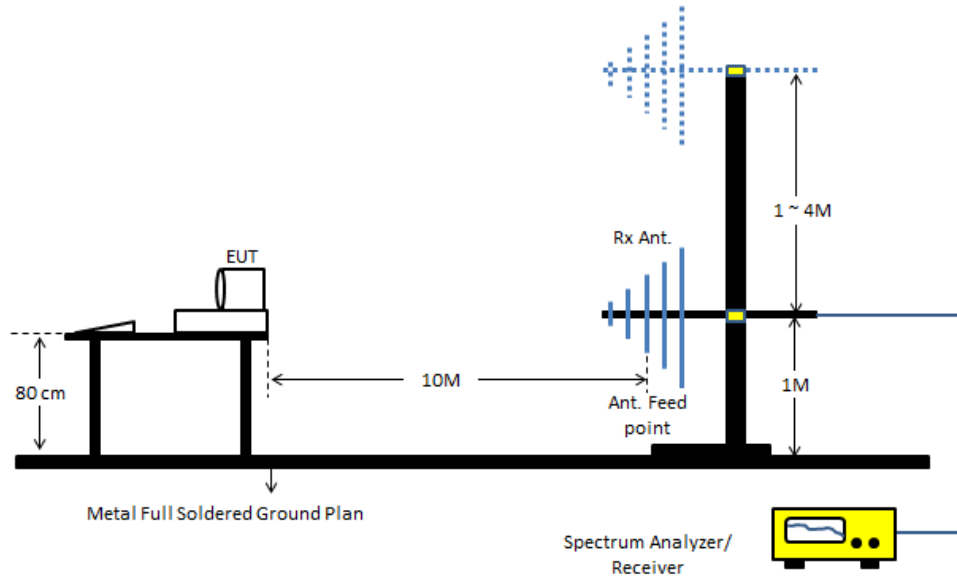

<Above 1 GHz>:

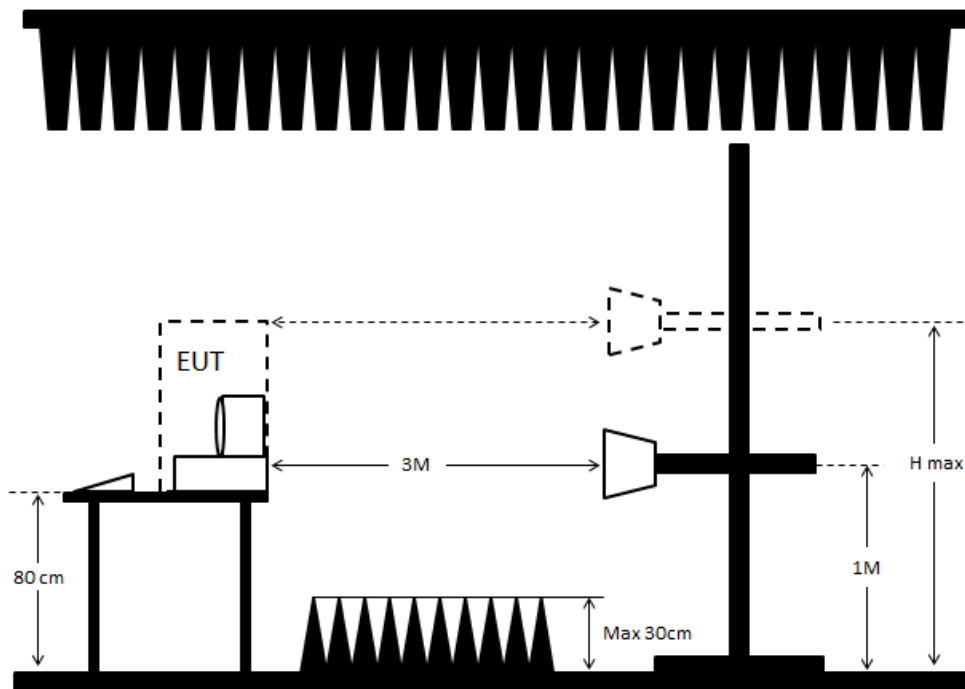


Remark : When EUT height is over 172cm , H max = Top of EUT

6.5. Test Result of Radiated Emission below 1 GHz


| | | | |
|---|-----------|------------------------|---------------------|
| Temperature | 20°C | Humidity | 61% |
| Test Engineer | Hank Yang | Frequency Range | 30 MHz to 1,000 MHz |
| Test Mode | Mode 1 | | |
| <ul style="list-style-type: none"> ▪ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level ▪ Margin = - Limit + (Read Level + Antenna Factor + Cable Loss - Preamp Factor) ▪ The test was passed at the minimum margin that marked by the frame in the following test record | | | |

Vertical 30 MHz to 200 MHz

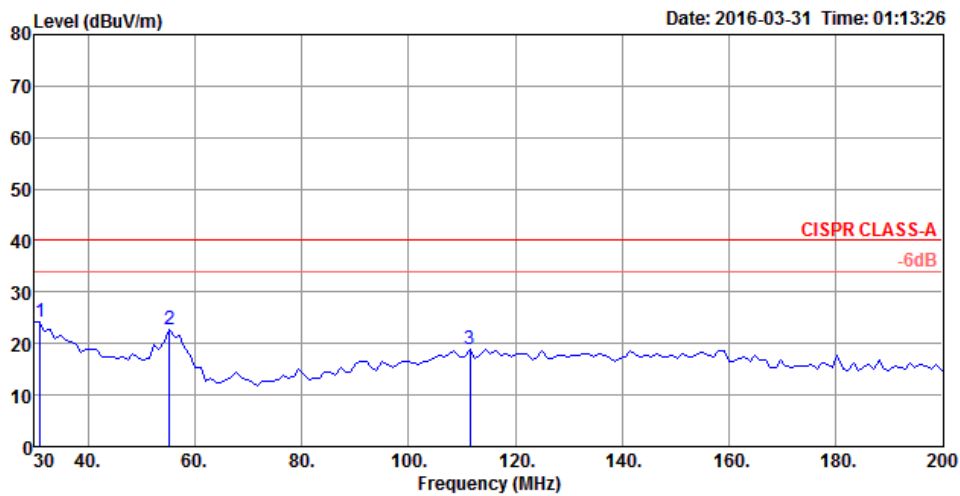


| | Freq | Level | Limit Line | Over Limit | Read Level | Preamp Factor | Antenna Factor | Cable Loss | Remark | A/Pos | T/Pos | Pol/Phase |
|---|--------|--------|------------|------------|------------|---------------|----------------|------------|--------|-------|-------|-----------|
| | MHz | dBUV/m | dBUV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 30.97 | 24.34 | 40.00 | -15.66 | 27.20 | 28.63 | 24.23 | 1.54 | QP | 100 | 129 | VERTICAL |
| 2 | 55.22 | 22.75 | 40.00 | -17.25 | 36.10 | 28.57 | 13.19 | 2.03 | QP | 100 | 21 | VERTICAL |
| 3 | 111.48 | 19.03 | 40.00 | -20.97 | 27.58 | 28.42 | 16.98 | 2.89 | QP | 100 | 5 | VERTICAL |

Vertical 200 MHz to 1,000 MHz

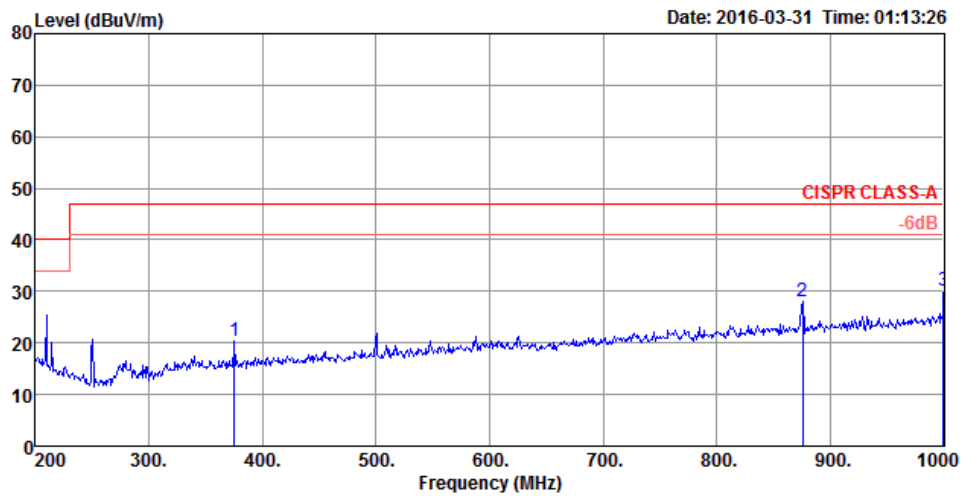


| | Freq | Level | Limit | Over | Read | Preamp | Antenna | Cable | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------|---------|-------|--------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 375.32 | 20.23 | 47.00 | -26.77 | 28.66 | 27.73 | 15.85 | 3.45 | QP | 100 | 91 | VERTICAL |
| 2 | 875.84 | 28.14 | 47.00 | -18.86 | 28.82 | 27.60 | 21.66 | 5.26 | QP | 400 | 213 | VERTICAL |
| 3 | 1000.00 | 29.97 | 47.00 | -17.03 | 28.70 | 27.13 | 22.70 | 5.70 | QP | 400 | 144 | VERTICAL |

Horizontal 30 MHz to 200 MHz

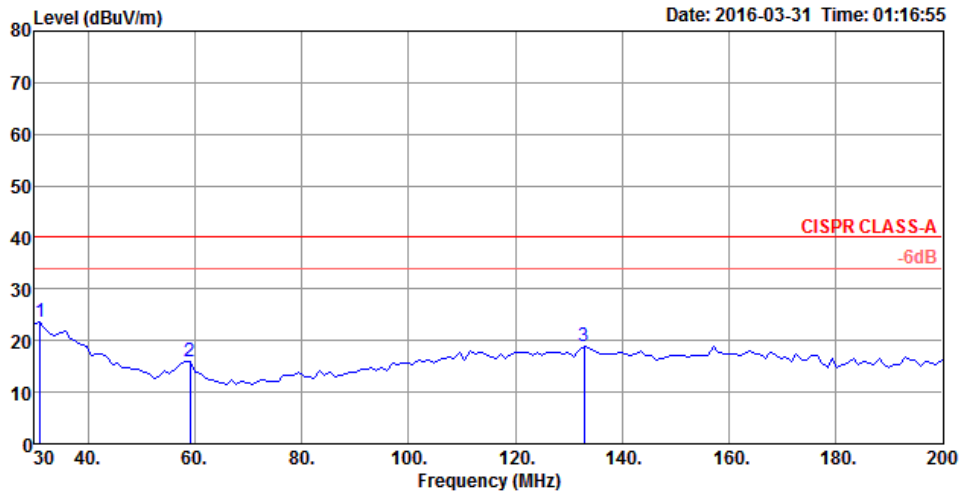

| | Freq | Level | Limit | Over | Read | Preamp | Antenna | Cable | Remark | A/Pos | T/Pos | Pol/Phase |
|---|--------|--------|--------|--------|-------|--------|---------|-------|--------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 30.97 | 23.56 | 40.00 | -16.44 | 26.42 | 28.63 | 24.23 | 1.54 | QP | 100 | 258 | HORIZONTAL |
| 2 | 59.10 | 15.96 | 40.00 | -24.04 | 30.24 | 28.56 | 12.17 | 2.11 | QP | 400 | 359 | HORIZONTAL |
| 3 | 132.82 | 18.93 | 40.00 | -21.07 | 26.57 | 28.31 | 17.51 | 3.16 | QP | 100 | 98 | HORIZONTAL |


Horizontal 200 MHz to 1,000 MHz

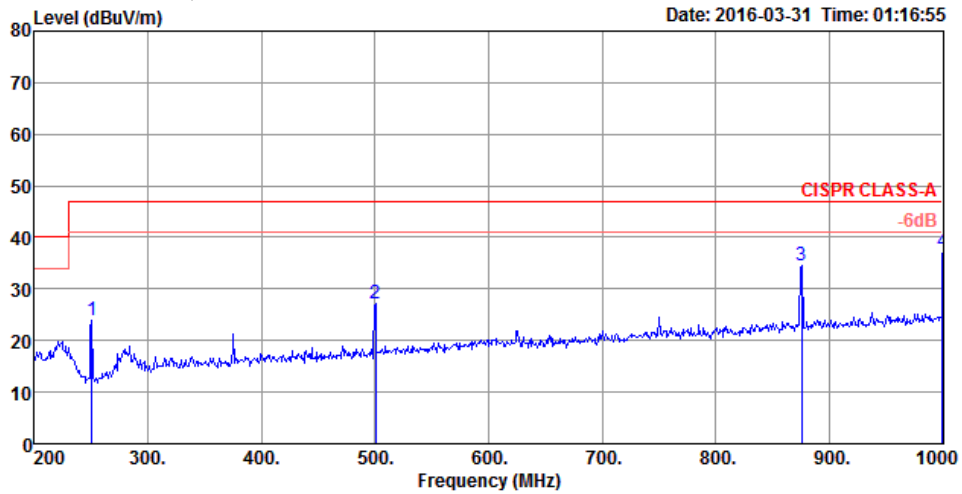

| | Freq | Level | Limit Line | Over Limit | Read Level | Preamp Factor | Antenna Factor | Cable Loss | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|---------------|----------------|------------|--------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 250.19 | 23.89 | 47.00 | -23.11 | 35.84 | 27.23 | 12.48 | 2.80 | QP | 400 | 28 | HORIZONTAL |
| 2 | 500.45 | 27.21 | 47.00 | -19.79 | 34.15 | 28.50 | 17.61 | 3.95 | QP | 100 | 72 | HORIZONTAL |
| 3 | 875.84 | 34.53 | 47.00 | -12.47 | 35.21 | 27.60 | 21.66 | 5.26 | QP | 100 | 72 | HORIZONTAL |
| 4 | 1000.00 | 37.24 | 47.00 | -9.76 | 35.97 | 27.13 | 22.70 | 5.70 | QP | 100 | 78 | HORIZONTAL |


| | | | |
|---|-----------|------------------------|---------------------|
| Temperature | 20°C | Humidity | 61% |
| Test Engineer | Hank Yang | Frequency Range | 30 MHz to 1,000 MHz |
| Test Mode | Mode 2 | | |
| <ul style="list-style-type: none"> Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level Margin = - Limit + (Read Level + Antenna Factor + Cable Loss - Preamp Factor) The test was passed at the minimum margin that marked by the frame in the following test record | | | |

Vertical 30 MHz to 200 MHz

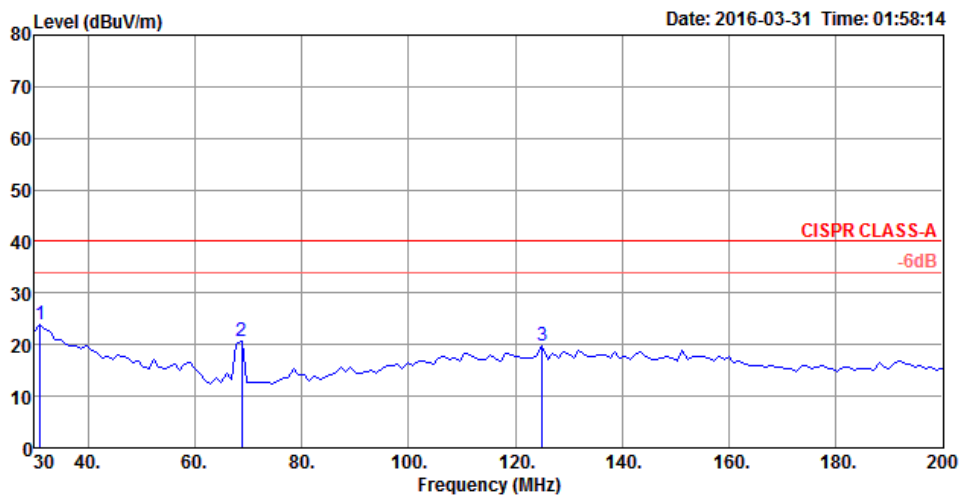


| | Freq | Level | Limit | Over | Read | Preamp | Antenna | Cable | Remark | A/Pos | T/Pos | Pol/Phase |
|---|--------|--------|--------|--------|-------|--------|---------|-------|--------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 30.97 | 24.03 | 40.00 | -15.97 | 26.89 | 28.63 | 24.23 | 1.54 | QP | 100 | 169 | VERTICAL |
| 2 | 68.80 | 20.81 | 40.00 | -19.19 | 35.00 | 28.54 | 12.08 | 2.27 | QP | 100 | 356 | VERTICAL |
| 3 | 125.06 | 19.73 | 40.00 | -20.27 | 27.46 | 28.35 | 17.55 | 3.07 | QP | 100 | 52 | VERTICAL |

Vertical 200 MHz to 1,000 MHz

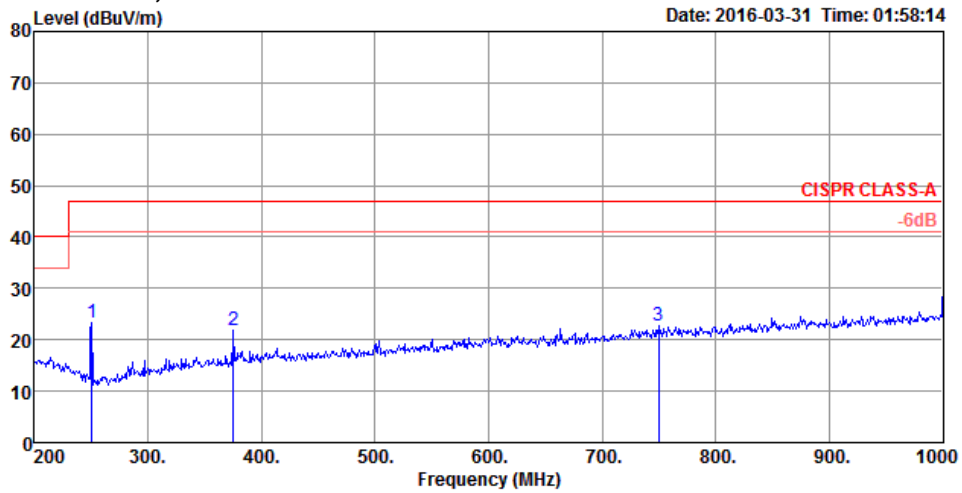


| | Freq | Level | Limit | Over | Read | Preamp | Antenna | Cable | Remark | A/Pos | T/Pos | Pol/Phase |
|---|--------|--------|--------|--------|-------|--------|---------|-------|--------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 250.19 | 23.30 | 47.00 | -23.70 | 35.25 | 27.23 | 12.48 | 2.80 | QP | 400 | 358 | VERTICAL |
| 2 | 375.32 | 21.72 | 47.00 | -25.28 | 30.15 | 27.73 | 15.85 | 3.45 | QP | 100 | 118 | VERTICAL |
| 3 | 749.74 | 22.66 | 47.00 | -24.34 | 25.09 | 28.02 | 20.59 | 5.00 | QP | 100 | 306 | VERTICAL |

Horizontal 30 MHz to 200 MHz

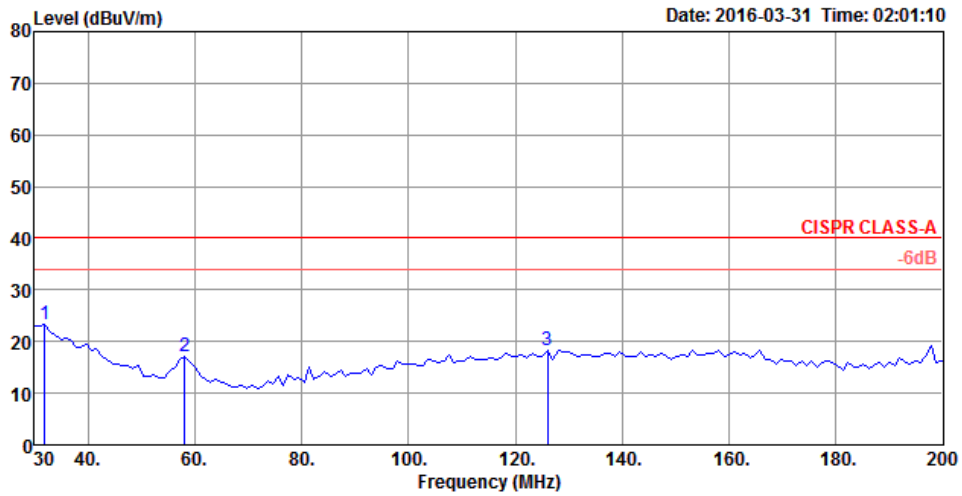

| | Freq | Level | Limit | Over | Read | Preamp | Antenna | Cable | Remark | A/Pos | T/Pos | Pol/Phase |
|---|--------|--------|--------|--------|-------|--------|---------|-------|--------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 31.94 | 23.26 | 40.00 | -16.74 | 26.67 | 28.62 | 23.65 | 1.56 | QP | 400 | 138 | HORIZONTAL |
| 2 | 58.13 | 17.01 | 40.00 | -22.99 | 31.10 | 28.56 | 12.38 | 2.09 | QP | 400 | 352 | HORIZONTAL |
| 3 | 126.03 | 18.25 | 40.00 | -21.75 | 25.95 | 28.34 | 17.56 | 3.08 | QP | 400 | 53 | HORIZONTAL |

Horizontal 200 MHz to 1,000 MHz

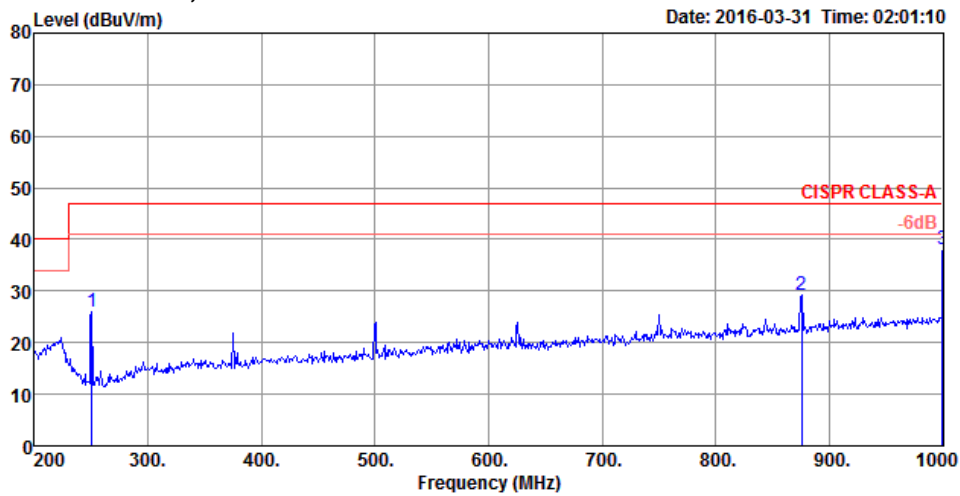


| | Freq | Level | Limit Line | Over Limit | Read Level | Preamp Factor | Antenna Factor | Cable Loss | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|---------------|----------------|------------|--------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 250.19 | 26.11 | 47.00 | -20.89 | 38.06 | 27.23 | 12.48 | 2.80 | QP | 400 | 56 | HORIZONTAL |
| 2 | 875.84 | 29.24 | 47.00 | -17.76 | 29.92 | 27.60 | 21.66 | 5.26 | QP | 100 | 101 | HORIZONTAL |
| 3 | 1000.00 | 38.07 | 47.00 | -8.93 | 36.80 | 27.13 | 22.70 | 5.70 | QP | 100 | 83 | HORIZONTAL |

6.6. Test Result of Radiated Emission above 1 GHz


| | | | |
|---|-----------|------------------------|------------------------|
| Temperature | 20°C | Humidity | 61% |
| Test Engineer | Hank Yang | Frequency Range | 1,000 MHz to 6,000 MHz |
| Test Mode | Mode 2 | | |
| <ul style="list-style-type: none"> ▪ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level ▪ Margin = - Limit + (Read Level + Antenna Factor + Cable Loss - Preamp Factor) ▪ The test was passed at the minimum margin that marked by the frame in the following test record | | | |

Vertical 1,000 MHz to 6,000 MHz

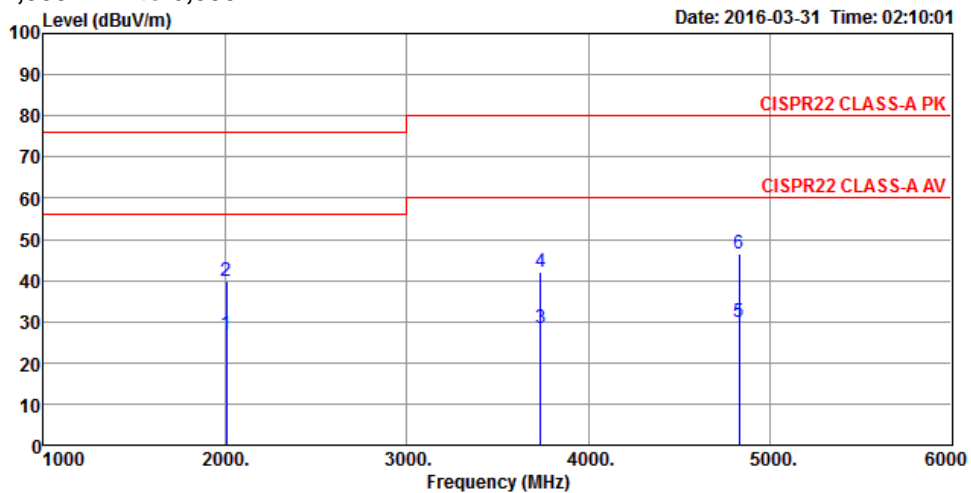

| | Freq | Level | Limit Line | Over Limit | Read Level | Preamp Factor | Antenna Factor | Cable Loss | Remark | A/Pos | T/Pos | PoI/Phase |
|---|---------|--------|------------|------------|------------|---------------|----------------|------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2005.00 | 26.99 | 56.00 | -29.01 | 23.70 | 35.89 | 31.70 | 7.48 | Average | 100 | 126 | VERTICAL |
| 2 | 2005.00 | 39.77 | 76.00 | -36.23 | 36.48 | 35.89 | 31.70 | 7.48 | Peak | 100 | 126 | VERTICAL |
| 3 | 3735.00 | 28.40 | 60.00 | -31.60 | 21.70 | 36.32 | 33.19 | 9.83 | Average | 100 | 310 | VERTICAL |
| 4 | 3735.00 | 42.17 | 80.00 | -37.83 | 35.47 | 36.32 | 33.19 | 9.83 | Peak | 100 | 310 | VERTICAL |
| 5 | 4830.00 | 29.79 | 60.00 | -30.21 | 20.81 | 36.38 | 34.23 | 11.13 | Average | 100 | 36 | VERTICAL |
| 6 | 4830.00 | 46.64 | 80.00 | -33.36 | 37.66 | 36.38 | 34.23 | 11.13 | Peak | 100 | 36 | VERTICAL |


Horizontal 1,000 MHz to 6,000 MHz

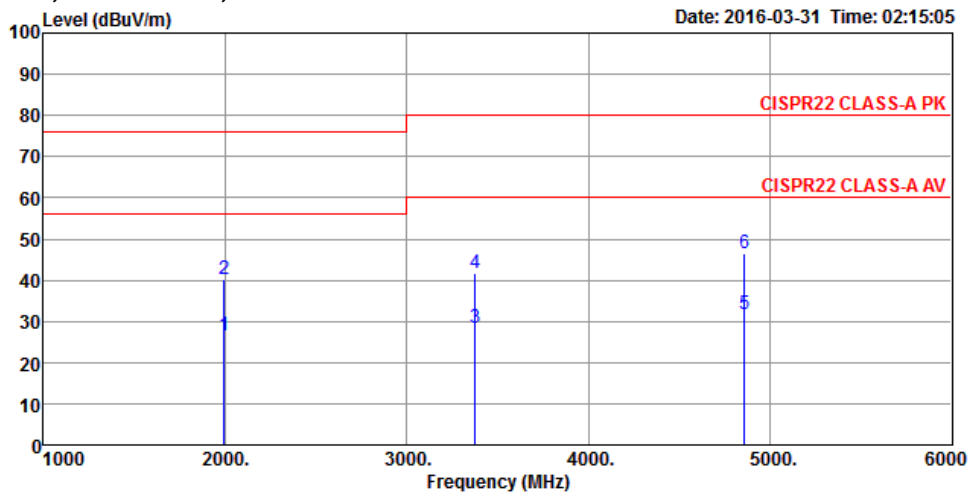

| | Freq | Level | Limit Line | Over Limit | Read Level | Preamp Factor | Antenna Factor | Cable Loss | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|---------------|----------------|------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 1995.00 | 26.59 | 56.00 | -29.41 | 23.30 | 35.89 | 31.70 | 7.48 | Average | 100 | 52 | HORIZONTAL |
| 2 | 1995.00 | 40.16 | 76.00 | -35.84 | 36.87 | 35.89 | 31.70 | 7.48 | Peak | 100 | 52 | HORIZONTAL |
| 3 | 3375.00 | 28.24 | 60.00 | -31.76 | 22.30 | 36.36 | 32.95 | 9.35 | Average | 100 | 63 | HORIZONTAL |
| 4 | 3375.00 | 41.53 | 80.00 | -38.47 | 35.59 | 36.36 | 32.95 | 9.35 | Peak | 100 | 63 | HORIZONTAL |
| 5 | 4860.00 | 31.76 | 60.00 | -28.24 | 22.71 | 36.38 | 34.24 | 11.19 | Average | 100 | 296 | HORIZONTAL |
| 6 | 4860.00 | 46.65 | 80.00 | -33.35 | 37.60 | 36.38 | 34.24 | 11.19 | Peak | 100 | 296 | HORIZONTAL |


| | | | |
|---|-----------|------------------------|------------------------|
| Temperature | 20°C | Humidity | 61% |
| Test Engineer | Hank Yang | Frequency Range | 1,000 MHz to 6,000 MHz |
| Test Mode | Mode 3 | | |
| <ul style="list-style-type: none"> Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level Margin = - Limit + (Read Level + Antenna Factor + Cable Loss - Preamp Factor) The test was passed at the minimum margin that marked by the frame in the following test record | | | |

Vertical 1,000 MHz to 6,000 MHz

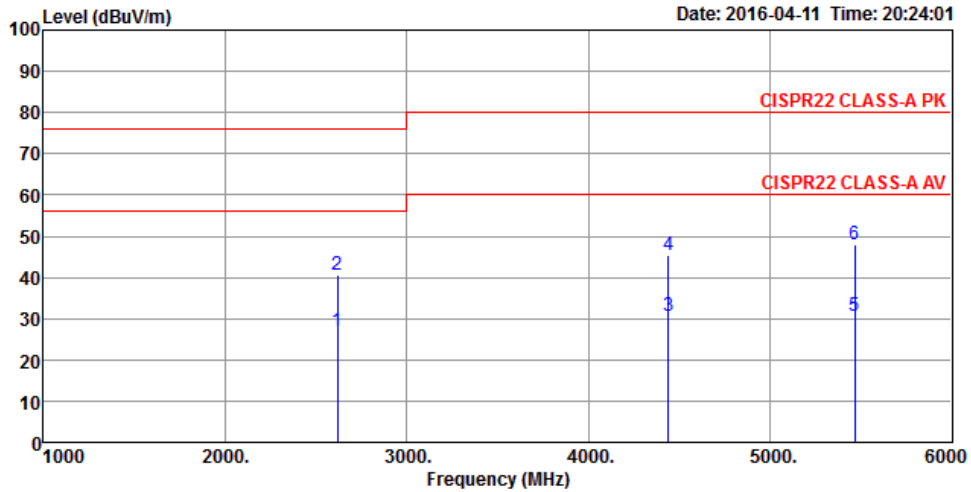

| | Freq | Level | Limit Line | Over Limit | Read Level | Preamp Factor | Antenna Factor | Cable Loss | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|---------------|----------------|------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2620.00 | 26.82 | 56.00 | -29.18 | 21.89 | 36.17 | 32.72 | 8.38 | Average | 100 | 281 | VERTICAL |
| 2 | 2620.00 | 40.56 | 76.00 | -35.44 | 35.63 | 36.17 | 32.72 | 8.38 | Peak | 100 | 281 | VERTICAL |
| 3 | 4440.00 | 30.64 | 60.00 | -29.36 | 22.40 | 36.40 | 34.02 | 10.62 | Average | 100 | 115 | VERTICAL |
| 4 | 4440.00 | 45.35 | 80.00 | -34.65 | 37.11 | 36.40 | 34.02 | 10.62 | Peak | 100 | 115 | VERTICAL |
| 5 | 5465.00 | 30.51 | 60.00 | -29.49 | 20.29 | 36.27 | 34.77 | 11.72 | Average | 100 | 71 | VERTICAL |
| 6 | 5465.00 | 47.88 | 80.00 | -32.12 | 37.66 | 36.27 | 34.77 | 11.72 | Peak | 100 | 71 | VERTICAL |

Horizontal 1,000 MHz to 6,000 MHz

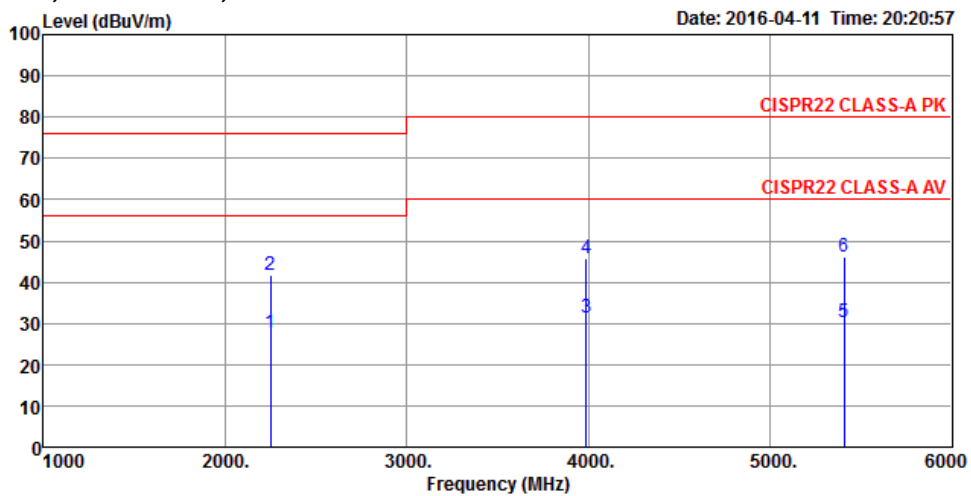

| | Freq | Level | Limit Line | Over Limit | Read Level | Preamp Factor | Antenna Factor | Cable Loss | Remark | A/Pos | T/Pos | PoI/Phase |
|---|---------|--------|------------|------------|------------|---------------|----------------|------------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2250.00 | 27.60 | 56.00 | -28.40 | 23.60 | 36.00 | 32.17 | 7.83 | Average | 100 | 12 | HORIZONTAL |
| 2 | 2250.00 | 41.67 | 76.00 | -34.33 | 37.67 | 36.00 | 32.17 | 7.83 | Peak | 100 | 12 | HORIZONTAL |
| 3 | 3990.00 | 31.24 | 60.00 | -28.76 | 23.80 | 36.27 | 33.50 | 10.21 | Average | 100 | 327 | HORIZONTAL |
| 4 | 3990.00 | 45.89 | 80.00 | -34.11 | 38.45 | 36.27 | 33.50 | 10.21 | Peak | 100 | 327 | HORIZONTAL |
| 5 | 5410.00 | 30.31 | 60.00 | -29.69 | 20.20 | 36.28 | 34.70 | 11.69 | Average | 100 | 333 | HORIZONTAL |
| 6 | 5410.00 | 45.99 | 80.00 | -34.01 | 35.88 | 36.28 | 34.70 | 11.69 | Peak | 100 | 333 | HORIZONTAL |

7. Harmonics Test

7.1. Standard

- EN 61000-3-2:2014


7.2. Test Procedure

The measured values of the harmonics components of the input current, including line current and neutral current, shall be compared with the limits given in Clause 7 of EN 61000-3-2.

7.3. Test Equipment Settings

| | |
|----------------|-------|
| Line Voltage | 230 V |
| Line Frequency | 50 Hz |
| Device Class | A |

7.4. Test Setup

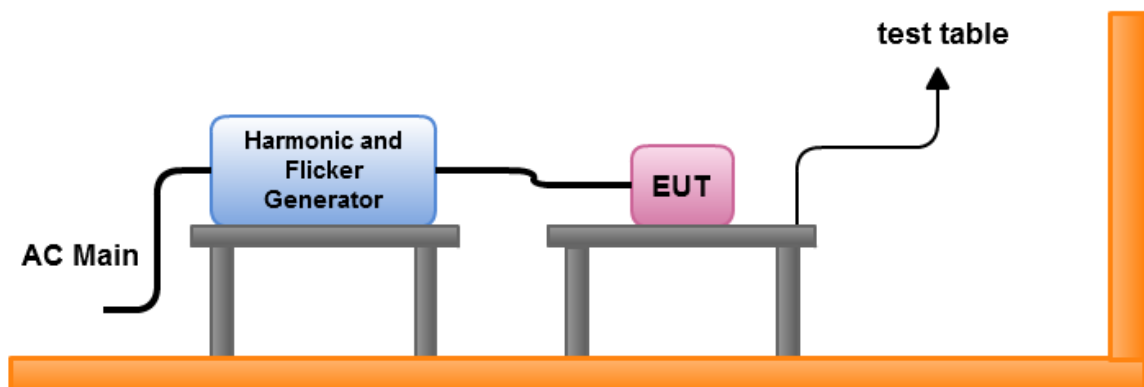

7.5. Test Result of Current Harmonics Test

| Temperature | 25°C | Humidity | 61% | | | | | | | | | | | | | | | | |
|---|------------|----------------|---------------|----------------|-----------|----------------|--------|----------------|-------|---------------|-------|----------------|-------|---------------|-------|----------------|-------|---------------|-------|
| Test Engineer | Da Deng | Test Date | Apr. 15, 2016 | | | | | | | | | | | | | | | | |
| Test Mode | Mode 1 | | | | | | | | | | | | | | | | | | |
| <p>Highest parameter values during test:</p> <table> <tr> <td>V_RMS (Volts):</td> <td>230.26</td> <td>Frequency(Hz):</td> <td>50.00</td> </tr> <tr> <td>I_Peak (Amps):</td> <td>0.993</td> <td>I_RMS (Amps):</td> <td>0.619</td> </tr> <tr> <td>I_Fund (Amps):</td> <td>0.612</td> <td>Crest Factor:</td> <td>1.632</td> </tr> <tr> <td>Power (Watts):</td> <td>127.6</td> <td>Power Factor:</td> <td>0.902</td> </tr> </table> | | | | V_RMS (Volts): | 230.26 | Frequency(Hz): | 50.00 | I_Peak (Amps): | 0.993 | I_RMS (Amps): | 0.619 | I_Fund (Amps): | 0.612 | Crest Factor: | 1.632 | Power (Watts): | 127.6 | Power Factor: | 0.902 |
| V_RMS (Volts): | 230.26 | Frequency(Hz): | 50.00 | | | | | | | | | | | | | | | | |
| I_Peak (Amps): | 0.993 | I_RMS (Amps): | 0.619 | | | | | | | | | | | | | | | | |
| I_Fund (Amps): | 0.612 | Crest Factor: | 1.632 | | | | | | | | | | | | | | | | |
| Power (Watts): | 127.6 | Power Factor: | 0.902 | | | | | | | | | | | | | | | | |
| Harm# | Harms(avg) | 100%Limit | %of Limit | Harms(max) | 150%Limit | %of Limit | Status | | | | | | | | | | | | |
| 2 | 0.003 | 1.080 | N/A | 0.003 | 1.620 | N/A | Pass | | | | | | | | | | | | |
| 3 | 0.054 | 2.300 | 2.3 | 0.054 | 3.450 | 1.6 | Pass | | | | | | | | | | | | |
| 4 | 0.001 | 0.430 | N/A | 0.001 | 0.645 | N/A | Pass | | | | | | | | | | | | |
| 5 | 0.024 | 1.140 | 2.1 | 0.024 | 1.710 | 1.4 | Pass | | | | | | | | | | | | |
| 6 | 0.000 | 0.300 | N/A | 0.001 | 0.450 | N/A | Pass | | | | | | | | | | | | |
| 7 | 0.013 | 0.770 | 1.7 | 0.013 | 1.155 | 1.1 | Pass | | | | | | | | | | | | |
| 8 | 0.000 | 0.230 | N/A | 0.001 | 0.345 | N/A | Pass | | | | | | | | | | | | |
| 9 | 0.007 | 0.400 | 1.7 | 0.007 | 0.600 | 1.2 | Pass | | | | | | | | | | | | |
| 10 | 0.000 | 0.184 | N/A | 0.001 | 0.276 | N/A | Pass | | | | | | | | | | | | |
| 11 | 0.007 | 0.330 | 2.0 | 0.007 | 0.495 | 1.4 | Pass | | | | | | | | | | | | |
| 12 | 0.000 | 0.153 | N/A | 0.001 | 0.230 | N/A | Pass | | | | | | | | | | | | |
| 13 | 0.008 | 0.210 | 4.0 | 0.009 | 0.315 | 2.7 | Pass | | | | | | | | | | | | |
| 14 | 0.000 | 0.131 | N/A | 0.000 | 0.197 | N/A | Pass | | | | | | | | | | | | |
| 15 | 0.007 | 0.150 | 5.0 | 0.007 | 0.225 | 3.3 | Pass | | | | | | | | | | | | |
| 16 | 0.000 | 0.115 | N/A | 0.001 | 0.173 | N/A | Pass | | | | | | | | | | | | |
| 17 | 0.005 | 0.132 | N/A | 0.005 | 0.198 | N/A | Pass | | | | | | | | | | | | |
| 18 | 0.000 | 0.102 | N/A | 0.001 | 0.153 | N/A | Pass | | | | | | | | | | | | |
| 19 | 0.001 | 0.118 | N/A | 0.002 | 0.178 | N/A | Pass | | | | | | | | | | | | |
| 20 | 0.001 | 0.092 | N/A | 0.001 | 0.138 | N/A | Pass | | | | | | | | | | | | |
| 21 | 0.003 | 0.107 | N/A | 0.003 | 0.161 | N/A | Pass | | | | | | | | | | | | |
| 22 | 0.000 | 0.084 | N/A | 0.000 | 0.125 | N/A | Pass | | | | | | | | | | | | |
| 23 | 0.005 | 0.098 | N/A | 0.005 | 0.147 | N/A | Pass | | | | | | | | | | | | |
| 24 | 0.000 | 0.077 | N/A | 0.001 | 0.115 | N/A | Pass | | | | | | | | | | | | |
| 25 | 0.004 | 0.090 | N/A | 0.004 | 0.135 | N/A | Pass | | | | | | | | | | | | |
| 26 | 0.000 | 0.071 | N/A | 0.001 | 0.107 | N/A | Pass | | | | | | | | | | | | |
| 27 | 0.003 | 0.083 | N/A | 0.004 | 0.125 | N/A | Pass | | | | | | | | | | | | |
| 28 | 0.001 | 0.066 | N/A | 0.001 | 0.099 | N/A | Pass | | | | | | | | | | | | |
| 29 | 0.003 | 0.078 | N/A | 0.003 | 0.116 | N/A | Pass | | | | | | | | | | | | |
| 30 | 0.001 | 0.061 | N/A | 0.001 | 0.092 | N/A | Pass | | | | | | | | | | | | |
| 31 | 0.003 | 0.073 | N/A | 0.003 | 0.109 | N/A | Pass | | | | | | | | | | | | |
| 32 | 0.001 | 0.058 | N/A | 0.001 | 0.086 | N/A | Pass | | | | | | | | | | | | |
| 33 | 0.006 | 0.068 | 9.0 | 0.006 | 0.102 | 6.1 | Pass | | | | | | | | | | | | |
| 34 | 0.000 | 0.054 | N/A | 0.001 | 0.081 | N/A | Pass | | | | | | | | | | | | |
| 35 | 0.002 | 0.064 | N/A | 0.002 | 0.096 | N/A | Pass | | | | | | | | | | | | |
| 36 | 0.001 | 0.051 | N/A | 0.001 | 0.077 | N/A | Pass | | | | | | | | | | | | |
| 37 | 0.002 | 0.061 | N/A | 0.002 | 0.091 | N/A | Pass | | | | | | | | | | | | |
| 38 | 0.001 | 0.048 | N/A | 0.001 | 0.073 | N/A | Pass | | | | | | | | | | | | |
| 39 | 0.003 | 0.058 | N/A | 0.004 | 0.087 | N/A | Pass | | | | | | | | | | | | |
| 40 | 0.001 | 0.046 | N/A | 0.001 | 0.069 | N/A | Pass | | | | | | | | | | | | |

| | | | |
|----------------------|---------|------------------|---------------|
| Temperature | 25°C | Humidity | 61% |
| Test Engineer | Da Deng | Test Date | Apr. 15, 2016 |
| Test Mode | Mode 2 | | |

Highest parameter values during test:

| | | | |
|----------------|--------|----------------|-------|
| V_RMS (Volts): | 230.26 | Frequency(Hz): | 50.00 |
| I_Peak (Amps): | 0.985 | I_RMS (Amps): | 0.617 |
| I_Fund (Amps): | 0.610 | Crest Factor: | 1.626 |
| Power (Watts): | 127.1 | Power Factor: | 0.902 |

| Harm# | Harms(avg) | 100%Limit | %of Limit | Harms(max) | 150%Limit | %of Limit | Status |
|-------|------------|-----------|-----------|------------|-----------|-----------|--------|
| 2 | 0.003 | 1.080 | N/A | 0.003 | 1.620 | N/A | Pass |
| 3 | 0.053 | 2.300 | 2.3 | 0.054 | 3.450 | 1.6 | Pass |
| 4 | 0.001 | 0.430 | N/A | 0.001 | 0.645 | N/A | Pass |
| 5 | 0.024 | 1.140 | 2.1 | 0.024 | 1.710 | 1.4 | Pass |
| 6 | 0.000 | 0.300 | N/A | 0.001 | 0.450 | N/A | Pass |
| 7 | 0.013 | 0.770 | 1.7 | 0.013 | 1.155 | 1.1 | Pass |
| 8 | 0.000 | 0.230 | N/A | 0.001 | 0.345 | N/A | Pass |
| 9 | 0.007 | 0.400 | 1.6 | 0.007 | 0.600 | 1.1 | Pass |
| 10 | 0.001 | 0.184 | N/A | 0.001 | 0.276 | N/A | Pass |
| 11 | 0.007 | 0.330 | 2.0 | 0.007 | 0.495 | 1.3 | Pass |
| 12 | 0.000 | 0.153 | N/A | 0.001 | 0.230 | N/A | Pass |
| 13 | 0.008 | 0.210 | 4.0 | 0.009 | 0.315 | 2.7 | Pass |
| 14 | 0.000 | 0.131 | N/A | 0.001 | 0.197 | N/A | Pass |
| 15 | 0.007 | 0.150 | 4.9 | 0.007 | 0.225 | 3.3 | Pass |
| 16 | 0.000 | 0.115 | N/A | 0.000 | 0.173 | N/A | Pass |
| 17 | 0.005 | 0.132 | N/A | 0.005 | 0.198 | N/A | Pass |
| 18 | 0.000 | 0.102 | N/A | 0.001 | 0.153 | N/A | Pass |
| 19 | 0.001 | 0.118 | N/A | 0.002 | 0.178 | N/A | Pass |
| 20 | 0.001 | 0.092 | N/A | 0.001 | 0.138 | N/A | Pass |
| 21 | 0.003 | 0.107 | N/A | 0.003 | 0.161 | N/A | Pass |
| 22 | 0.000 | 0.084 | N/A | 0.001 | 0.125 | N/A | Pass |
| 23 | 0.005 | 0.098 | N/A | 0.005 | 0.147 | N/A | Pass |
| 24 | 0.000 | 0.077 | N/A | 0.001 | 0.115 | N/A | Pass |
| 25 | 0.004 | 0.090 | N/A | 0.004 | 0.135 | N/A | Pass |
| 26 | 0.000 | 0.071 | N/A | 0.001 | 0.107 | N/A | Pass |
| 27 | 0.003 | 0.083 | N/A | 0.004 | 0.125 | N/A | Pass |
| 28 | 0.001 | 0.066 | N/A | 0.001 | 0.099 | N/A | Pass |
| 29 | 0.003 | 0.078 | N/A | 0.003 | 0.116 | N/A | Pass |
| 30 | 0.001 | 0.061 | N/A | 0.001 | 0.092 | N/A | Pass |
| 31 | 0.003 | 0.073 | N/A | 0.003 | 0.109 | N/A | Pass |
| 32 | 0.001 | 0.058 | N/A | 0.001 | 0.086 | N/A | Pass |
| 33 | 0.006 | 0.068 | 9.1 | 0.006 | 0.102 | 6.2 | Pass |
| 34 | 0.000 | 0.054 | N/A | 0.000 | 0.081 | N/A | Pass |
| 35 | 0.002 | 0.064 | N/A | 0.002 | 0.096 | N/A | Pass |
| 36 | 0.001 | 0.051 | N/A | 0.001 | 0.077 | N/A | Pass |
| 37 | 0.002 | 0.061 | N/A | 0.002 | 0.091 | N/A | Pass |
| 38 | 0.001 | 0.048 | N/A | 0.001 | 0.073 | N/A | Pass |
| 39 | 0.003 | 0.058 | N/A | 0.003 | 0.087 | N/A | Pass |
| 40 | 0.001 | 0.046 | N/A | 0.001 | 0.069 | N/A | Pass |

8. Voltage Fluctuations and Flicker Test

8.1. Standard

- EN 61000-3-3:2013

8.2. Test Procedure


The equipment shall be tested under the conditions of **Clause 5**.

The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of $\pm 8\%$ is achieved during the whole assessment procedure.

8.3. Test Equipment Settings

| | |
|----------------|-------|
| Line Voltage | 230 V |
| Line Frequency | 50 Hz |

8.4. Test Setup

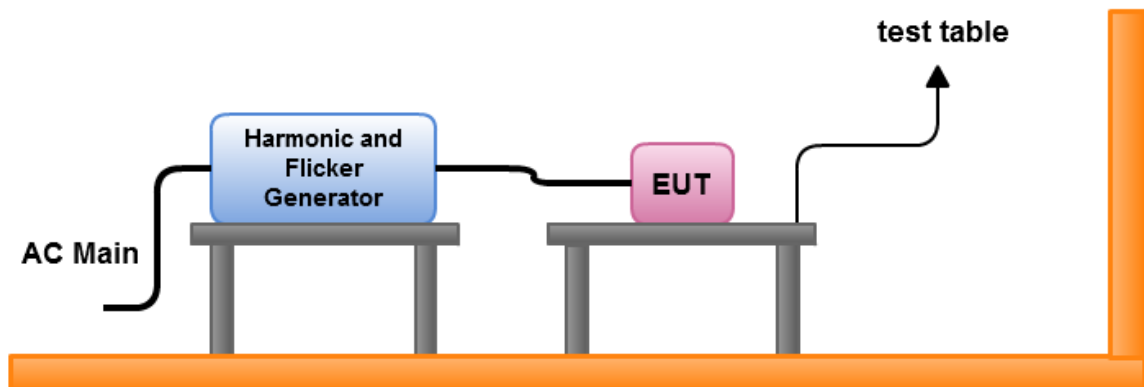

8.5. Test Result of Voltage Fluctuation and Flicker Test

| | | | |
|--|----------------------|--------------------------|---------------|
| Temperature | 21°C | Humidity | 58% |
| Test Engineer | Jimmy Chen / Ryo Fan | Test Date | Mar. 31, 2016 |
| Test Mode | Mode 1 | Final Test Result | Pass |
| Vrms at the end of test (Volt): | 230.10 | Test limit (%): | 3.30 Pass |
| Highest dt (%): | 0.00 | Test limit (mS): | 500.0 Pass |
| T-max (mS): | 0 | Test limit (%): | 3.30 Pass |
| Highest dc (%): | 0.00 | Test limit (%): | 4.00 Pass |
| Highest dmax (%): | 0.03 | Test limit: | 1.000 Pass |
| Highest Pst (10 min. period): | 0.247 | | |

| | | | |
|--|----------------------|--------------------------|---------------|
| Temperature | 21°C | Humidity | 58% |
| Test Engineer | Jimmy Chen / Ryo Fan | Test Date | Mar. 31, 2016 |
| Test Mode | Mode 2 | Final Test Result | Pass |
| Vrms at the end of test (Volt): | 230.13 | Test limit (%): | 3.30 Pass |
| Highest dt (%): | 0.00 | Test limit (mS): | 500.0 Pass |
| T-max (mS): | 0 | Test limit (%): | 3.30 Pass |
| Highest dc (%): | 0.00 | Test limit (%): | 4.00 Pass |
| Highest dmax (%): | 0.11 | Test limit: | 1.000 Pass |
| Highest Pst (10 min. period): | 0.209 | | |

9. General Performance Criteria Description of Immunity Test

According to Clause 7.1 of EN 55024 standard, the following describes the general performance criteria.


| | |
|--|--|
| <p>Criterion A (Note 1)</p> | <p>During and after the test the EUT shall continue to operate as intended without operator intervention.</p> <p>No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended.</p> |
| <p>Criterion B (Note 2)</p> | <p>During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.</p> <p>After the test, the equipment shall continue to operate as intended without operator intervention.</p> <p>For xDSL Terminal equipment: During the test shall not cause the system to lose the established connection or retrain.</p> <p>At the cessation of the test, the system shall operate in the condition established prior to the application of the test without user intervention.</p> |
| <p>Criterion C</p> | <p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p> |
| <p>Note 1 : No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p> <p>Note 2 : After the application of the phenomenon below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state if stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p> | |

10. Electrostatic Discharge Immunity Test (ESD)

10.1. Test Specification

| | |
|------------------------------|---|
| Reference Standard | IEC 61000-4-2 |
| Discharge Impedance | 330 ohm / 150 pF |
| Contact Discharge | ± 2, 4 kV |
| Air Discharge | ± 2, 4, 8 kV |
| Rise Time | 0.8 ns +/-25 % |
| Current at 30 ns | +/- 30 % |
| Current at 60 ns | +/- 30 % |
| Polarity | Positive / Negative |
| Number of Discharge | Air Discharge 20 times at each test point |
| | Contact Discharge 50 times at each test point |
| Single Discharge Mode | 1 discharge per 1s |

10.2. Test Setup

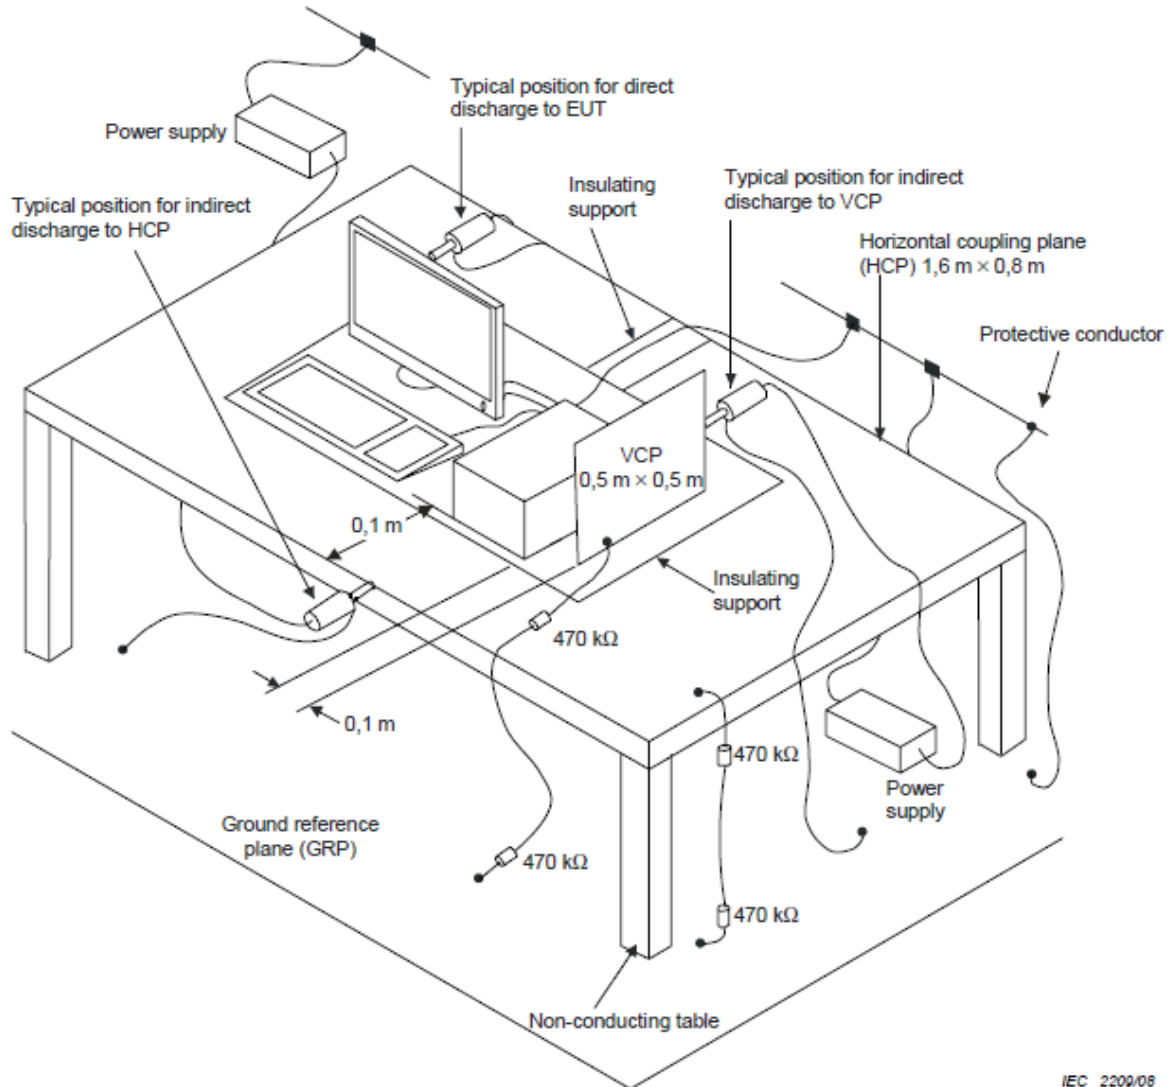

IEC 2209/08

The test setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform DIRECT and INDIRECT application of discharges to the EUT as applicable, in the follow manner:
 CONTACT DISCHARGE to the conductive surfaces and to coupling plane;
 AIR DISCHARGE at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.

10.3. Test Setup for Tests Performed in Laboratory

A ground reference plane was provided on the floor of the test site. It was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. In the SPORTON EMC LAB., we provided 1 mm thickness aluminum ground reference plane or 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 1 m x 1 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system.

The EUT was arranged and connected according to its functional requirements. A distance of 1m minimum was provided between the EUT and the wall of the lab. and any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not come closer than 0.2m to other conductive parts in the test setup.

Where the EUT is installed on a metal table, the table was connected to the reference plane via a cable with a 470k ohm resistor located at each end, to prevent a build-up of charge. The test setup was consist a wooden table, 0.8m high, standing on the ground reference plane. A HCP, 1.6 m x 0.8 m, was placed on the table. The EUT and cables was isolated from the HCP by an insulating support 0.5 mm thick. The VCP size, 0.5 m x 0.5 m.

10.4. ESD Test Procedure

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
 - ambient temperature: 15°C to 35°C;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 kPa (860 mbar) to 106 kPa (1060 mbar).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT.

The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- e. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- f. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted:
 - If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - The contact discharge test shall not be applied to such surfaces.
- g. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT . After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.

10.5. Test Result

| | | | |
|----------------------|--|----------------------|----------------------|
| Temperature | 19°C | Humidity | 50% |
| Pressure | 100 kPa | Test Engineer | Jimmy Chen / Da Deng |
| Test Mode | Mode 1 | Test Date | Apr. 01, 2016 |
| Standard | Required Criteria B | | |
| Test Recorded | There was no abnormal situation during the test compared with initial operation. | | |

Direct Application :

| Test Point | Tested Voltage (kV) | Contact Discharge (Performance Criteria) | Air Discharge (Performance Criteria) |
|------------|---------------------|--|--------------------------------------|
| 1-11 | ±2,4 | A | - |
| 12 | ±2,4,8 | - | A |
| 13 | ±2,4 | A | - |
| 14-17 | ±2,4,8 | - | A |
| 18-20 | ±2,4 | A | - |
| 21-26 | ±2,4,8 | - | A |
| 27-31 | ±2,4 | A | - |
| 32 | ±2,4,8 | - | A |
| 33-34 | ±2,4 | A | - |
| 35 | ±2,4,8 | - | A |
| 36 | ±2,4 | A | - |
| 37 | ±2,4,8 | - | A |

Indirect Application :

| Coupling Plan | Coupling Side | Test Voltage (kV) | Performance Criteria |
|---------------|-----------------------------|-------------------|----------------------|
| HCP | Front / Rear / Right / Left | ± 2, 4 | A |
| VCP | Front / Rear / Right / Left | ± 2, 4 | A |

| | | | |
|----------------------|--|----------------------|----------------------|
| Temperature | 19°C | Humidity | 50% |
| Pressure | 100 kPa | Test Engineer | Jimmy Chen / Da Deng |
| Test Mode | Mode 2 | Test Date | Apr. 01, 2016 |
| Standard | Required Criteria B | | |
| Test Recorded | There was no abnormal situation during the test compared with initial operation. | | |

Direct Application :


| Test Point | Tested Voltage (kV) | Contact Discharge (Performance Criteria) | Air Discharge (Performance Criteria) |
|------------|---------------------|--|--------------------------------------|
| 1-11 | ±2,4 | A | - |
| 12 | ±2,4,8 | - | A |
| 13 | ±2,4 | A | - |
| 14-16 | ±2,4,8 | - | A |
| 17-18 | ±2,4 | A | - |
| 19-25 | ±2,4,8 | - | A |
| 26-30 | ±2,4 | A | - |
| 31 | ±2,4,8 | - | A |
| 32-33 | ±2,4 | A | - |
| 34 | ±2,4,8 | - | A |
| 35 | ±2,4 | A | - |
| 36 | ±2,4,8 | - | A |



Indirect Application :


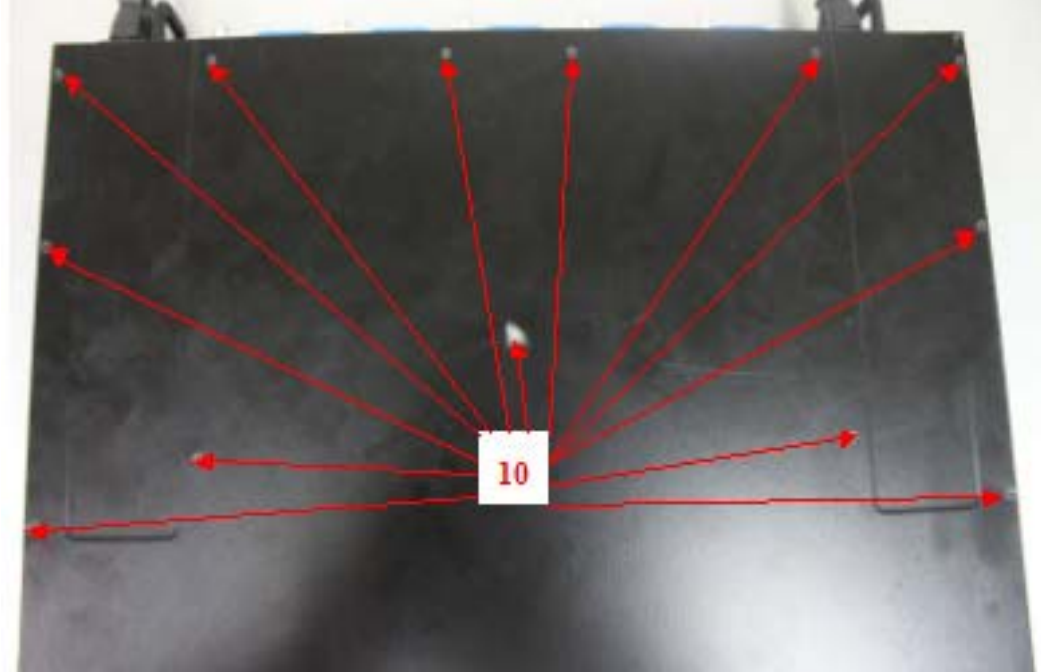
| Coupling Plan | Coupling Side | Test Voltage (kV) | Performance Criteria |
|---------------|-----------------------------|-------------------|----------------------|
| HCP | Front / Rear / Right / Left | ± 2, 4 | A |
| VCP | Front / Rear / Right / Left | ± 2, 4 | A |



10.6. Photographs of Electrostatic Discharge Immunity Test



Test Mode: Mode 1


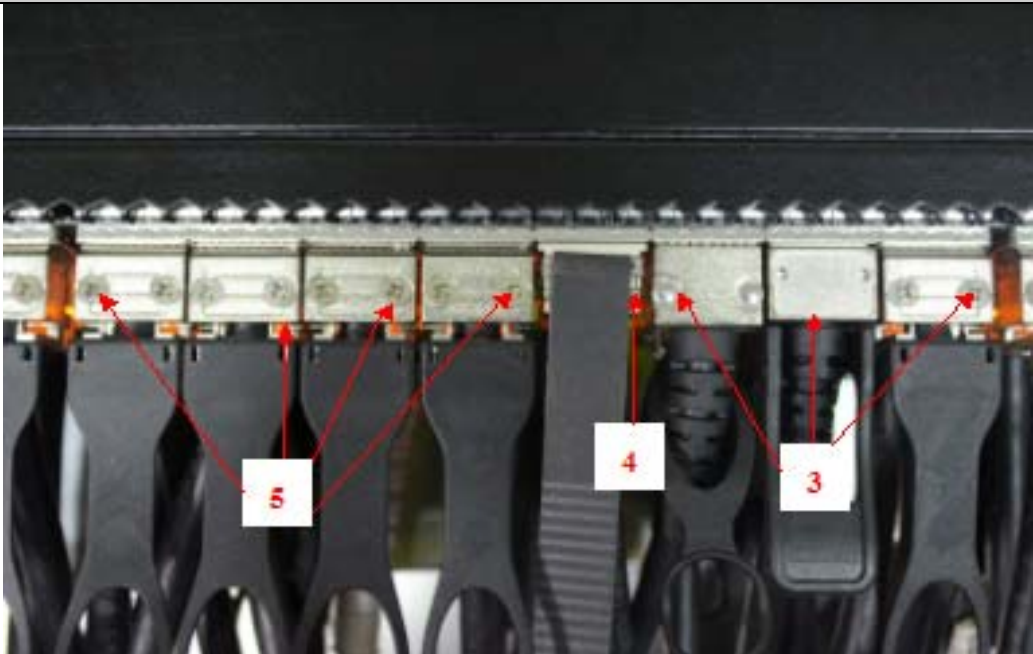
| Test Points | |
|--|--|
| <p>Air Discharge (BLUE color)</p> <p>Contact Discharge (RED color)</p> |  |
| Test Points | |
| <p>Air Discharge (BLUE color)</p> <p>Contact Discharge (RED color)</p> |  |

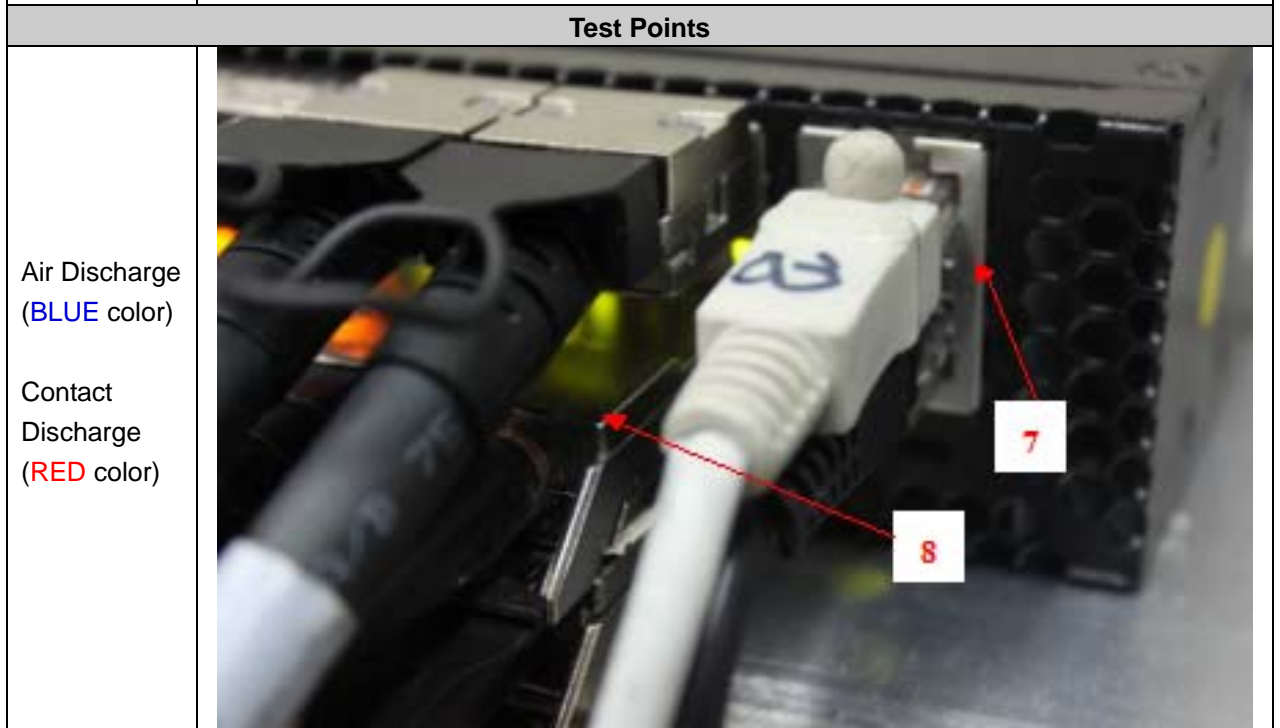
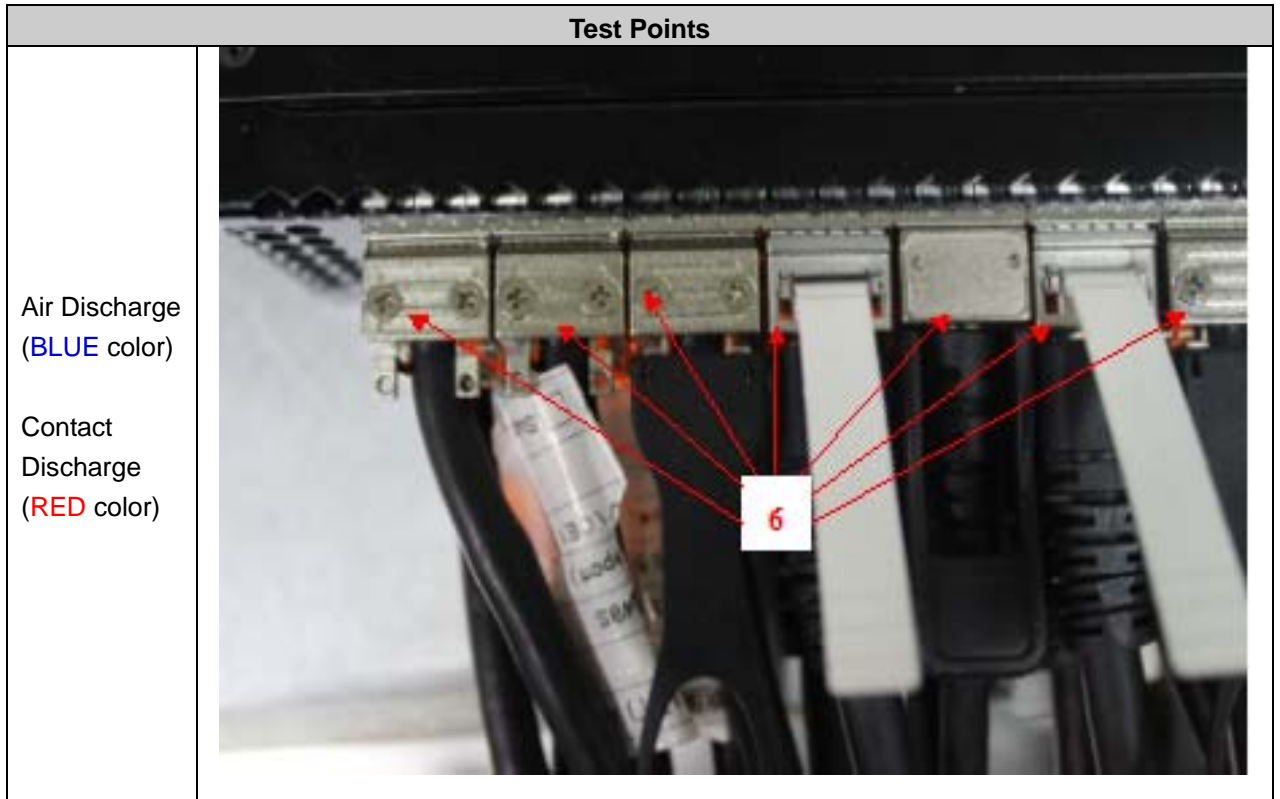




| Test Points | |
|--|--|
| <p>Air Discharge (BLUE color)</p> <p>Contact Discharge (RED color)</p> |  |
| Test Points | |
| <p>Air Discharge (BLUE color)</p> <p>Contact Discharge (RED color)</p> |  |

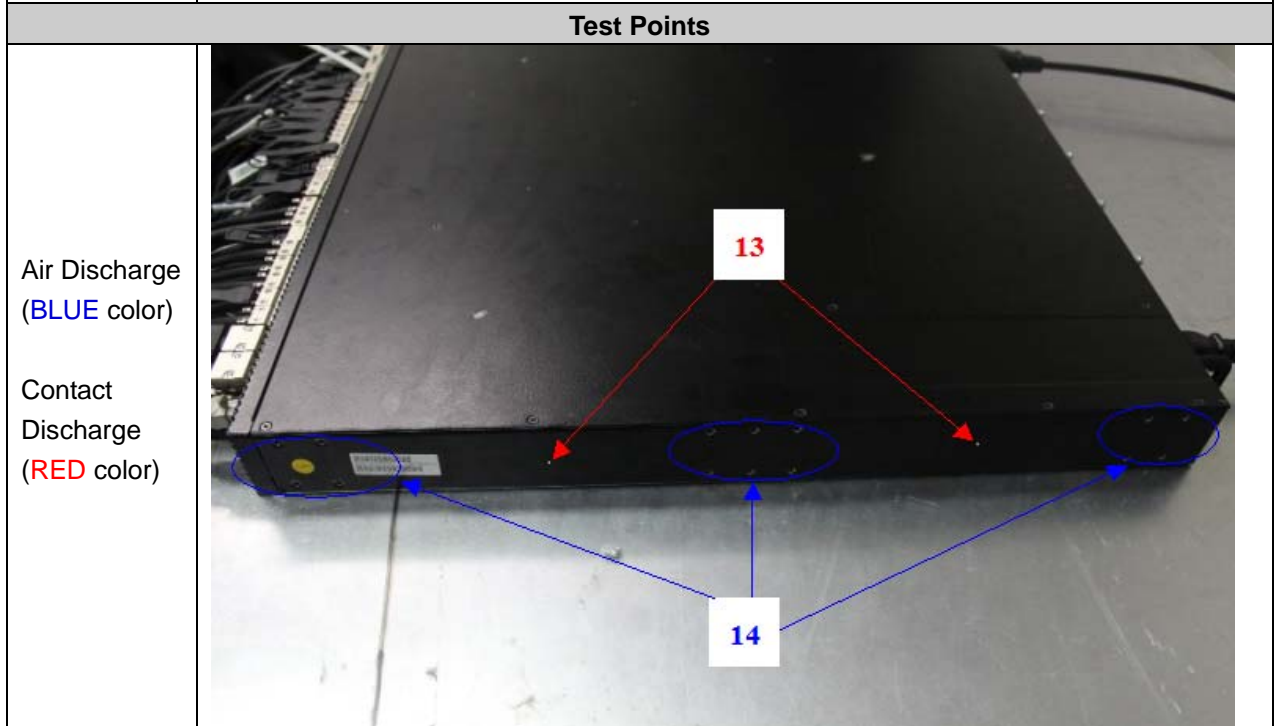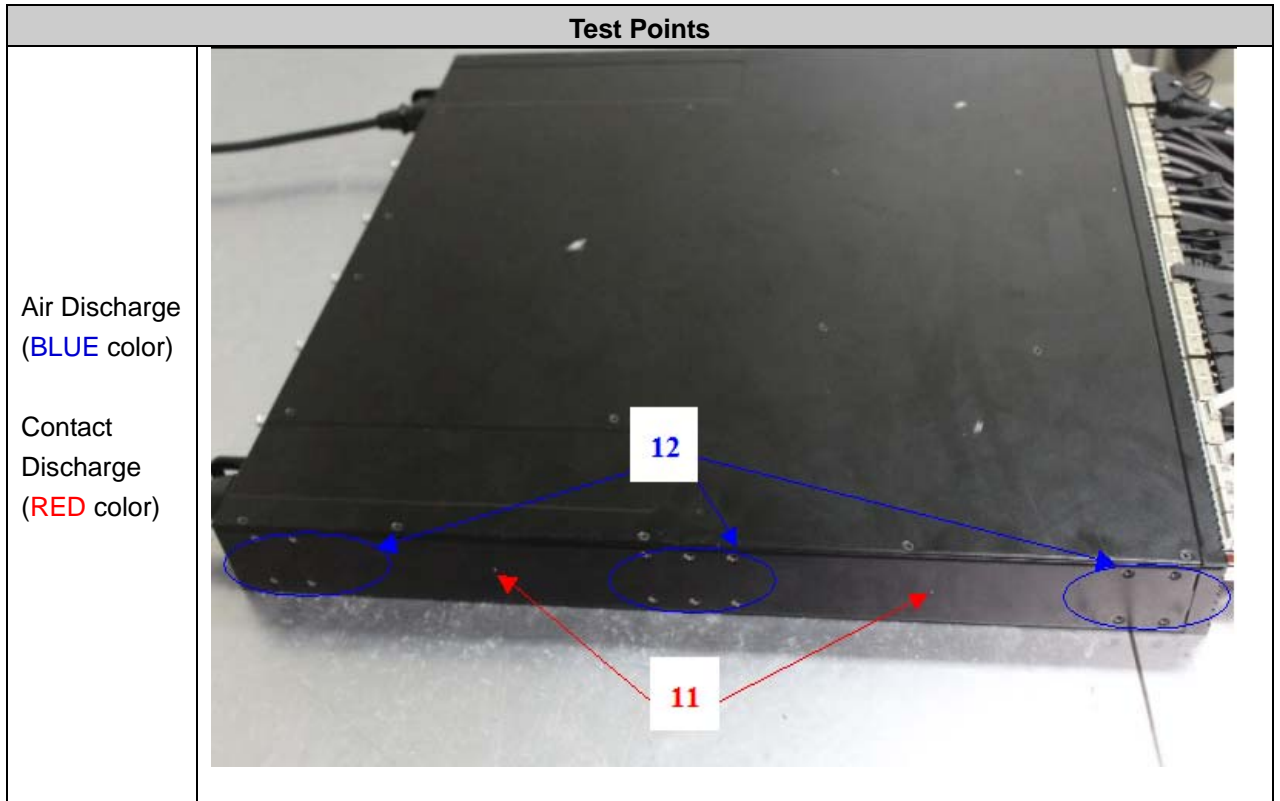

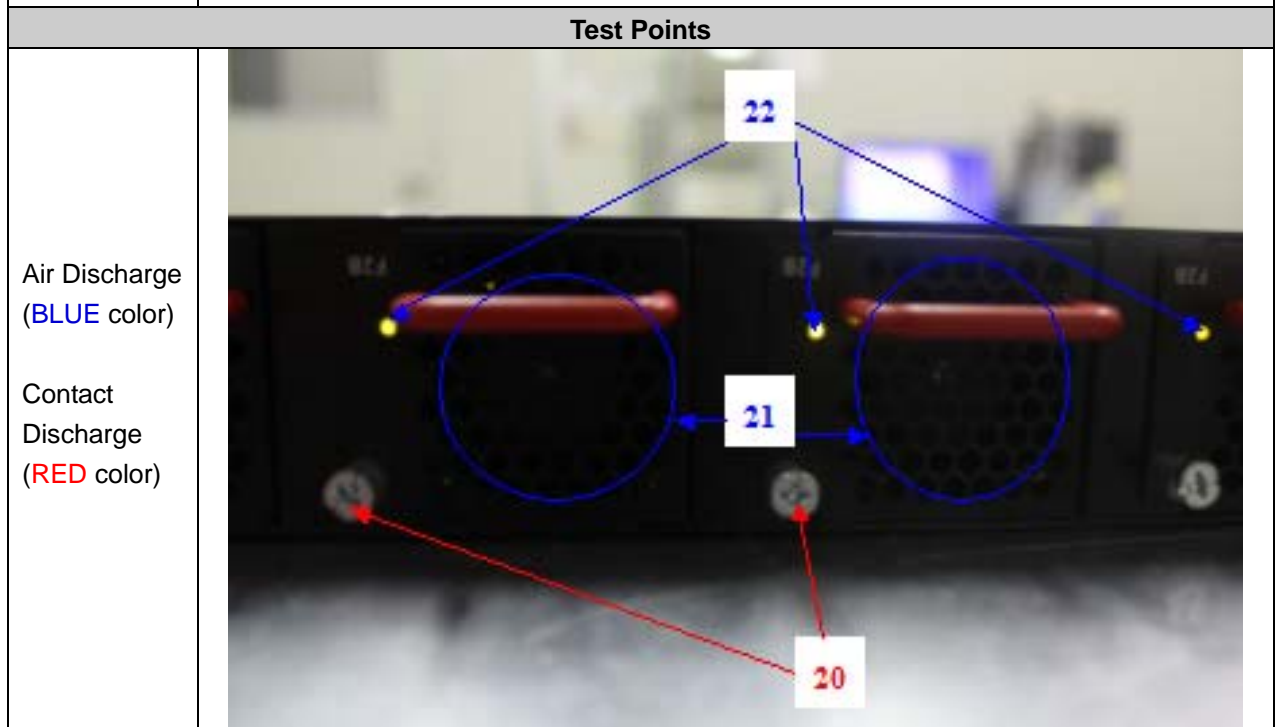
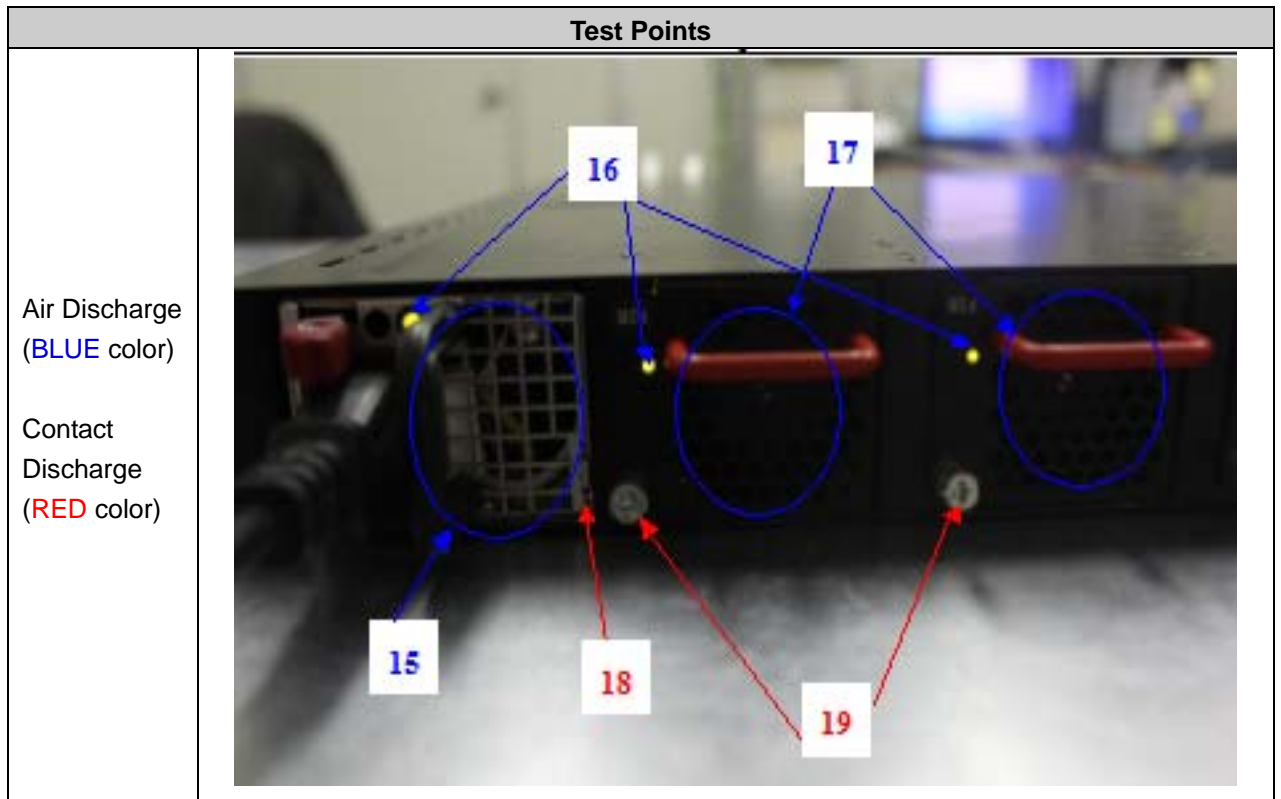


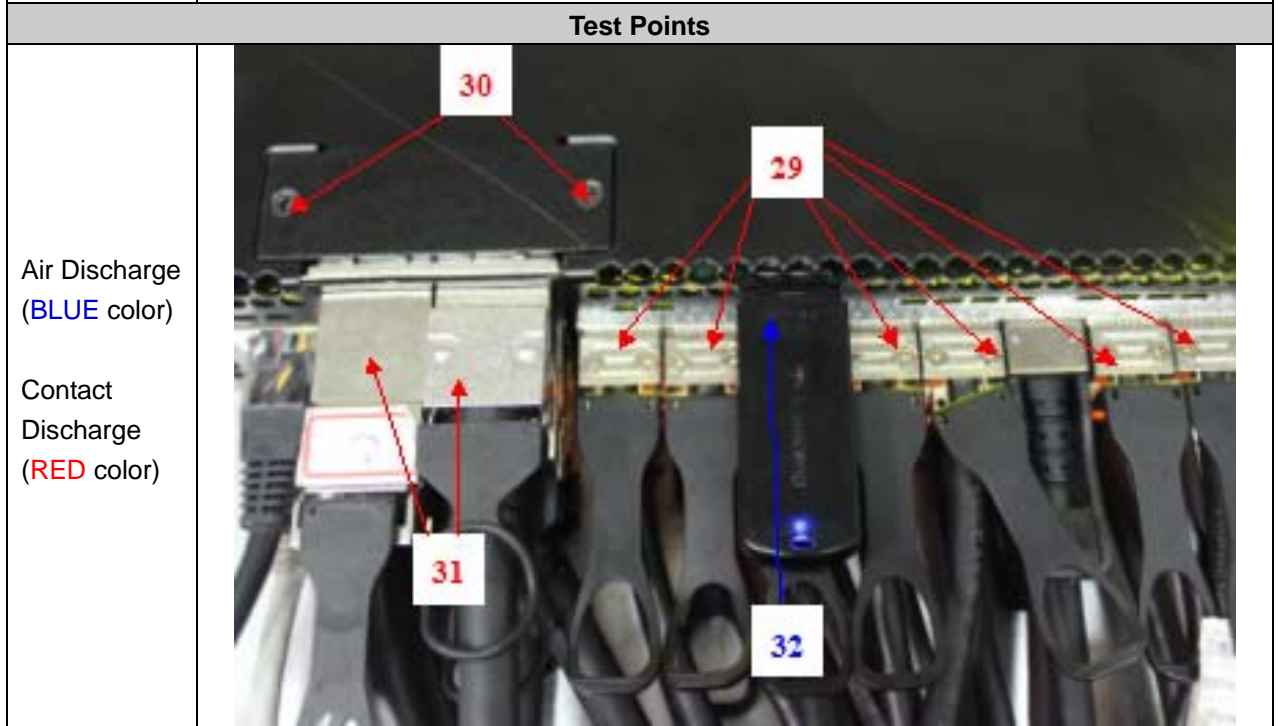
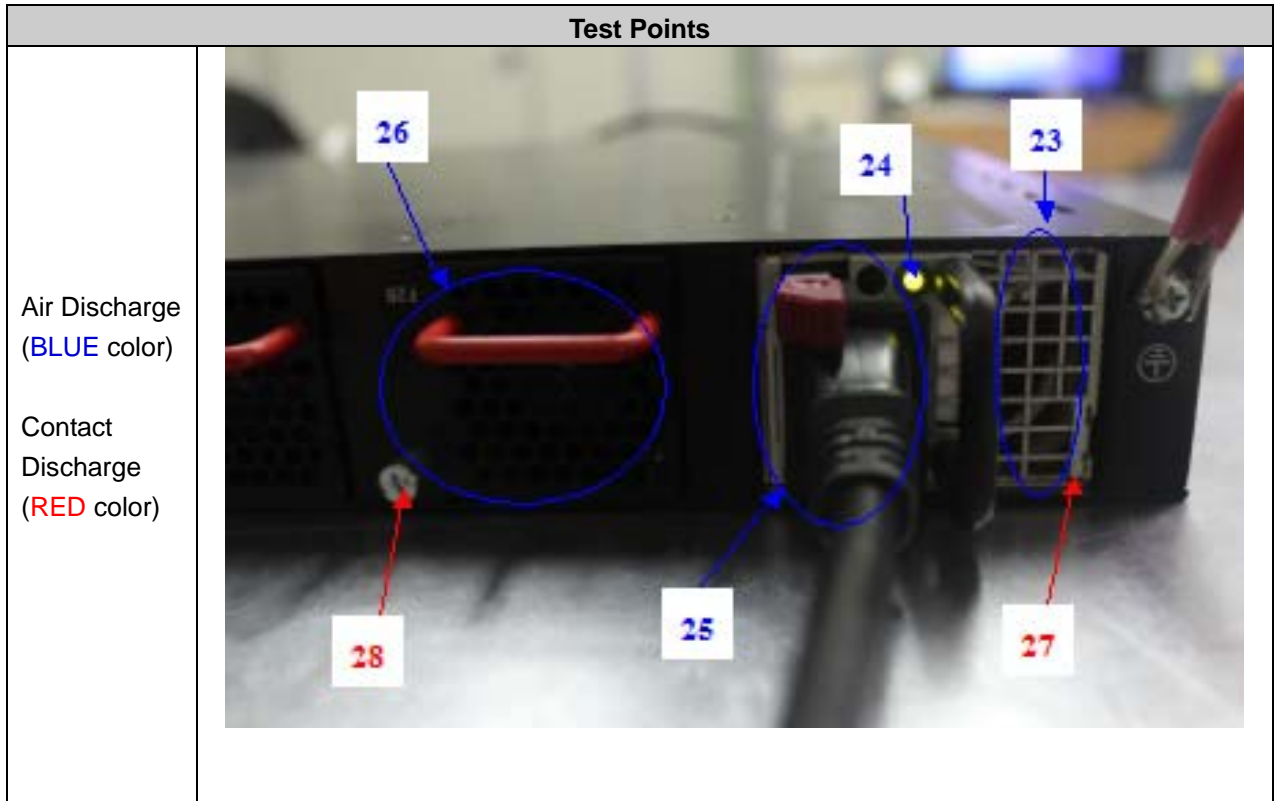


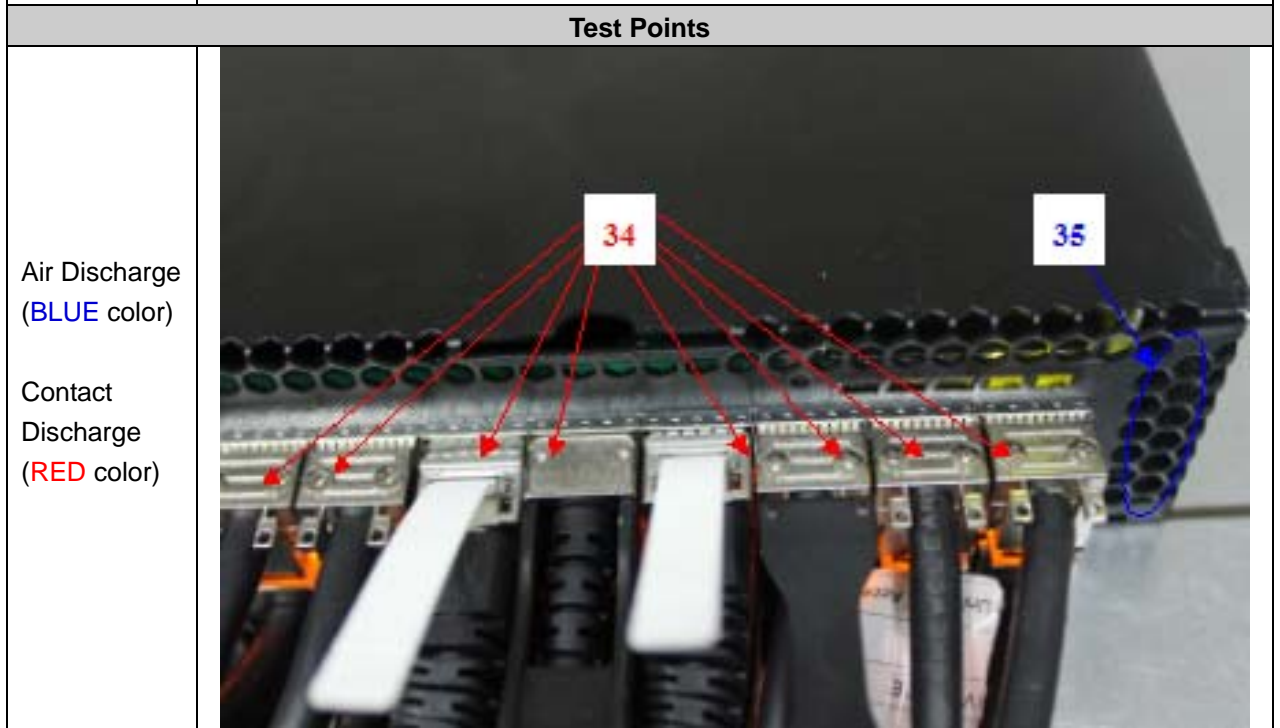
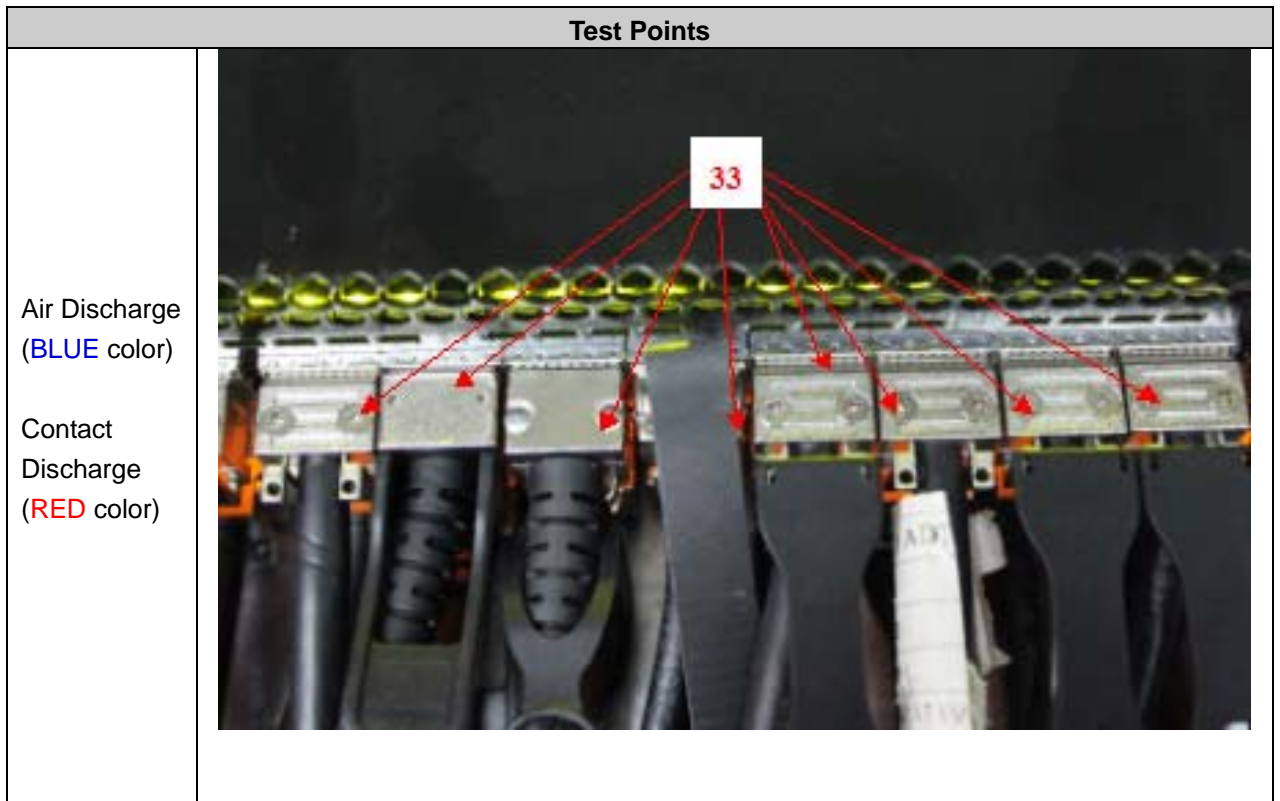


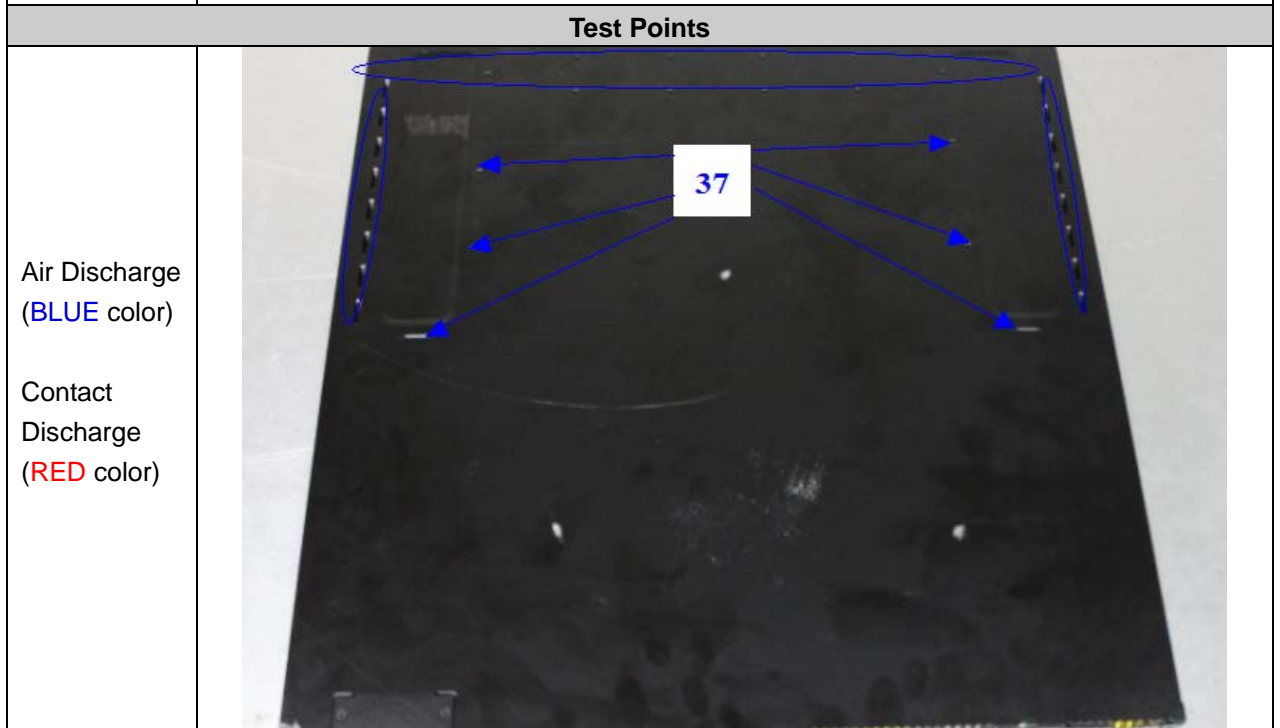
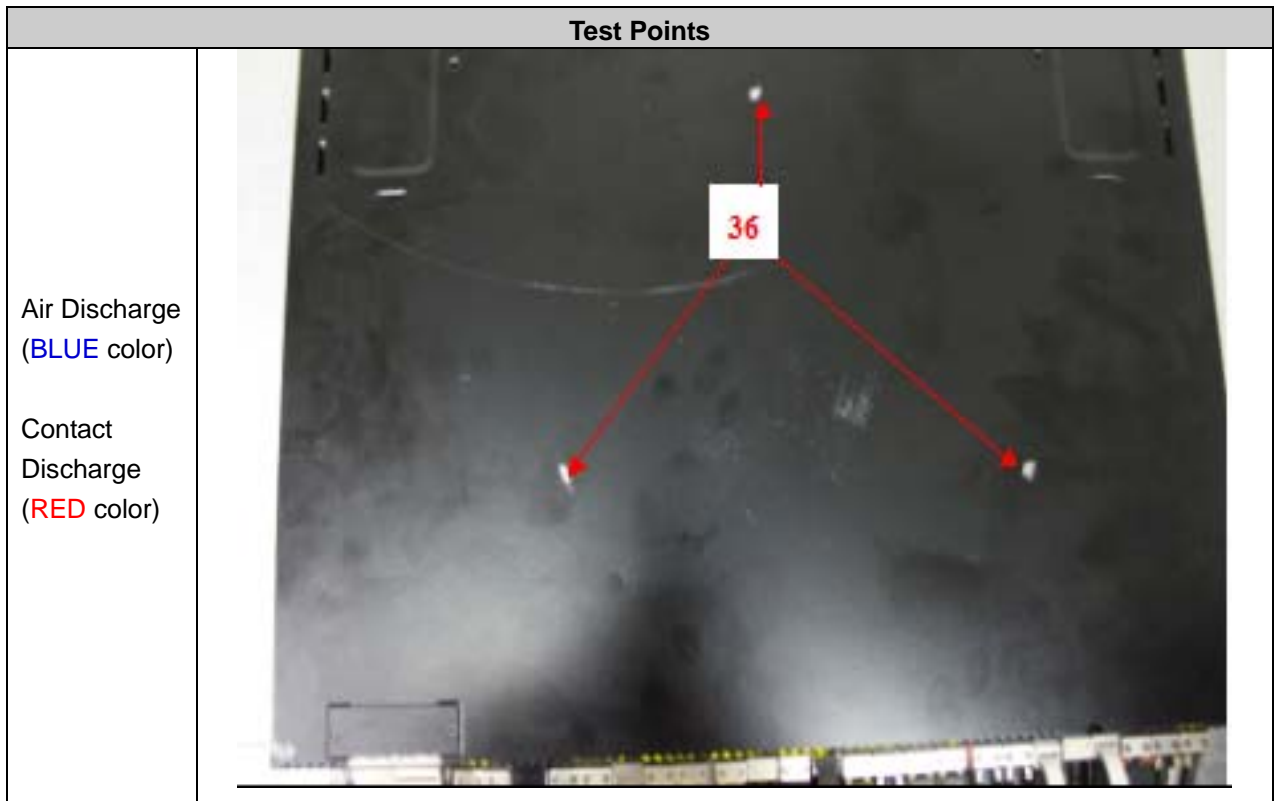




Test Mode: Mode 2

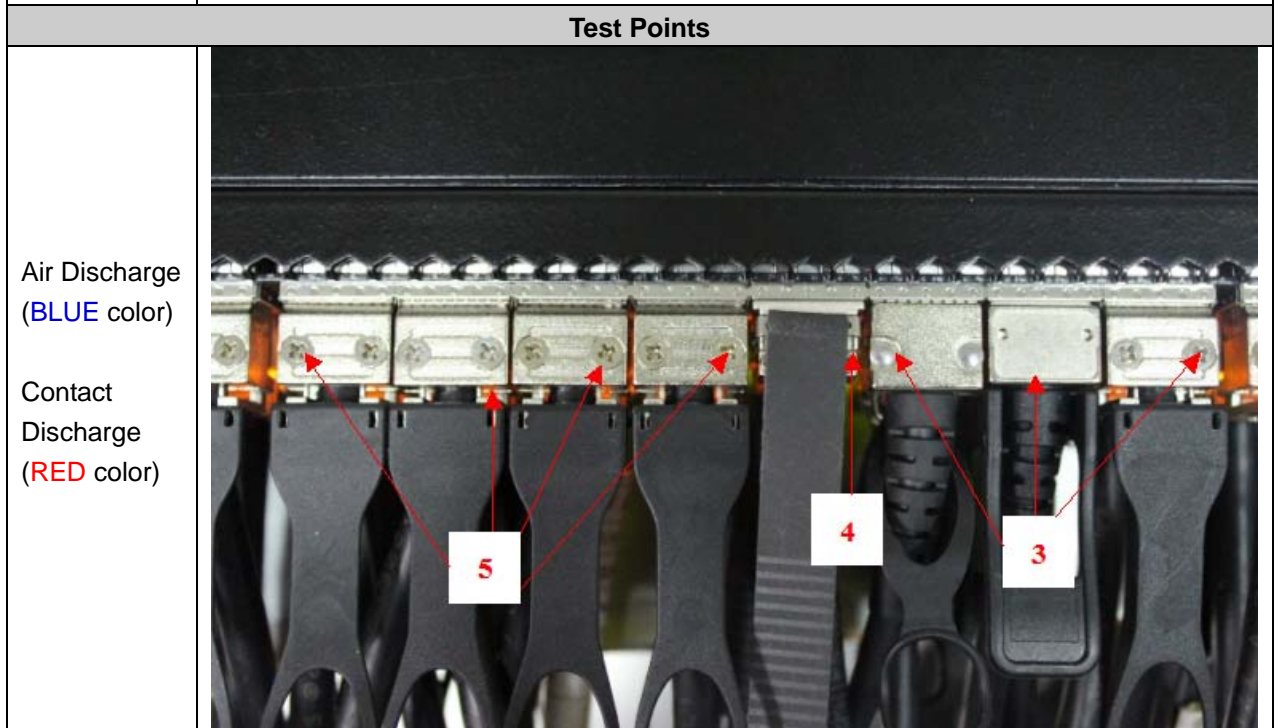
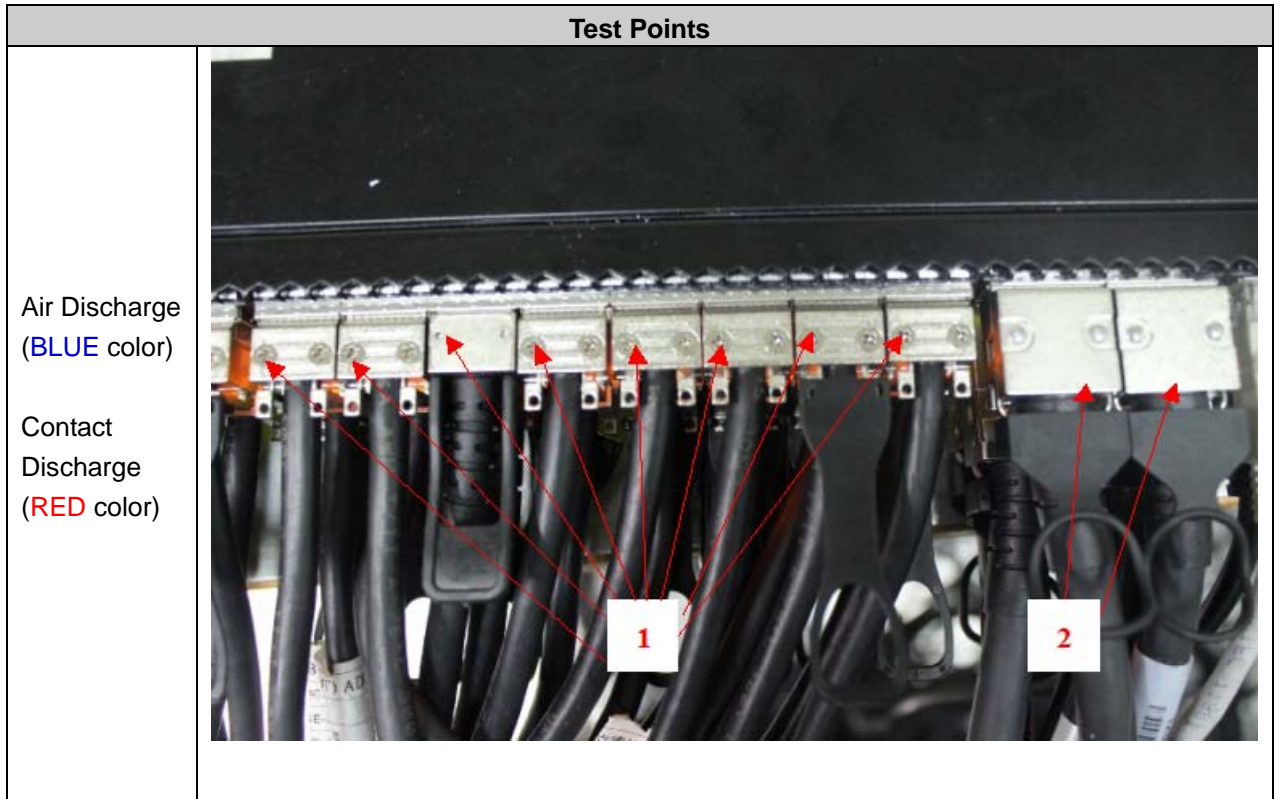


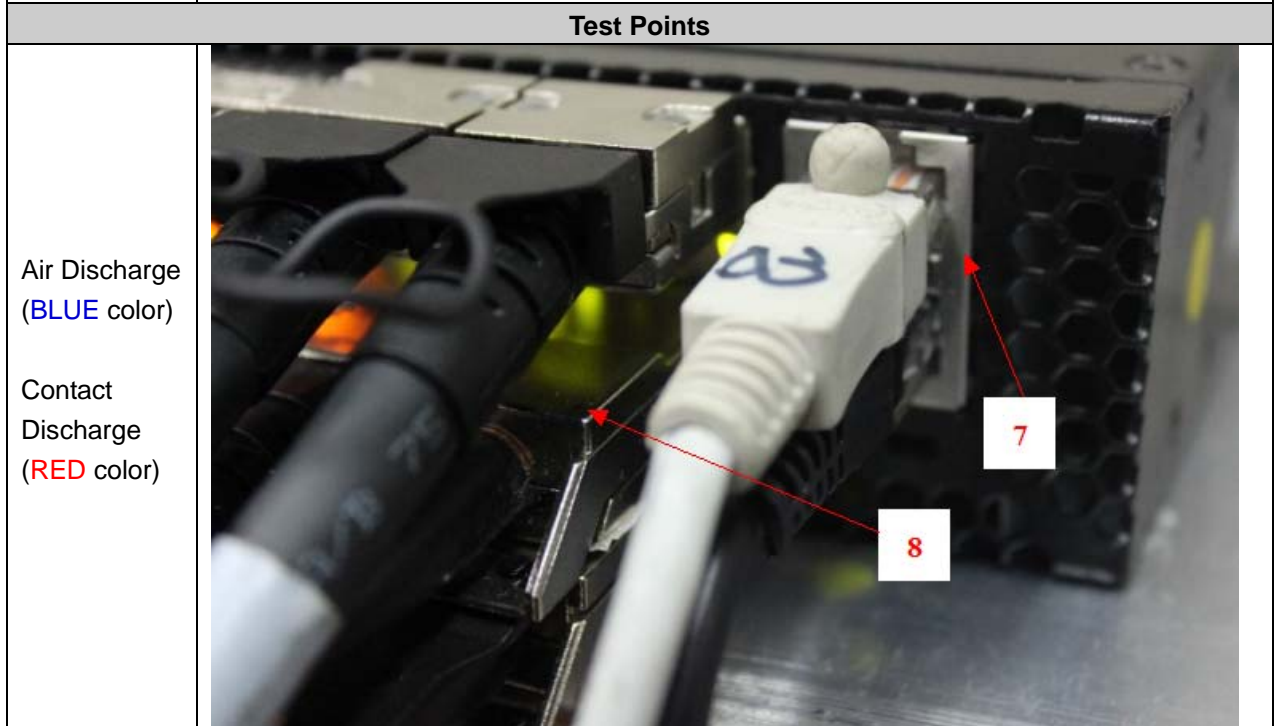
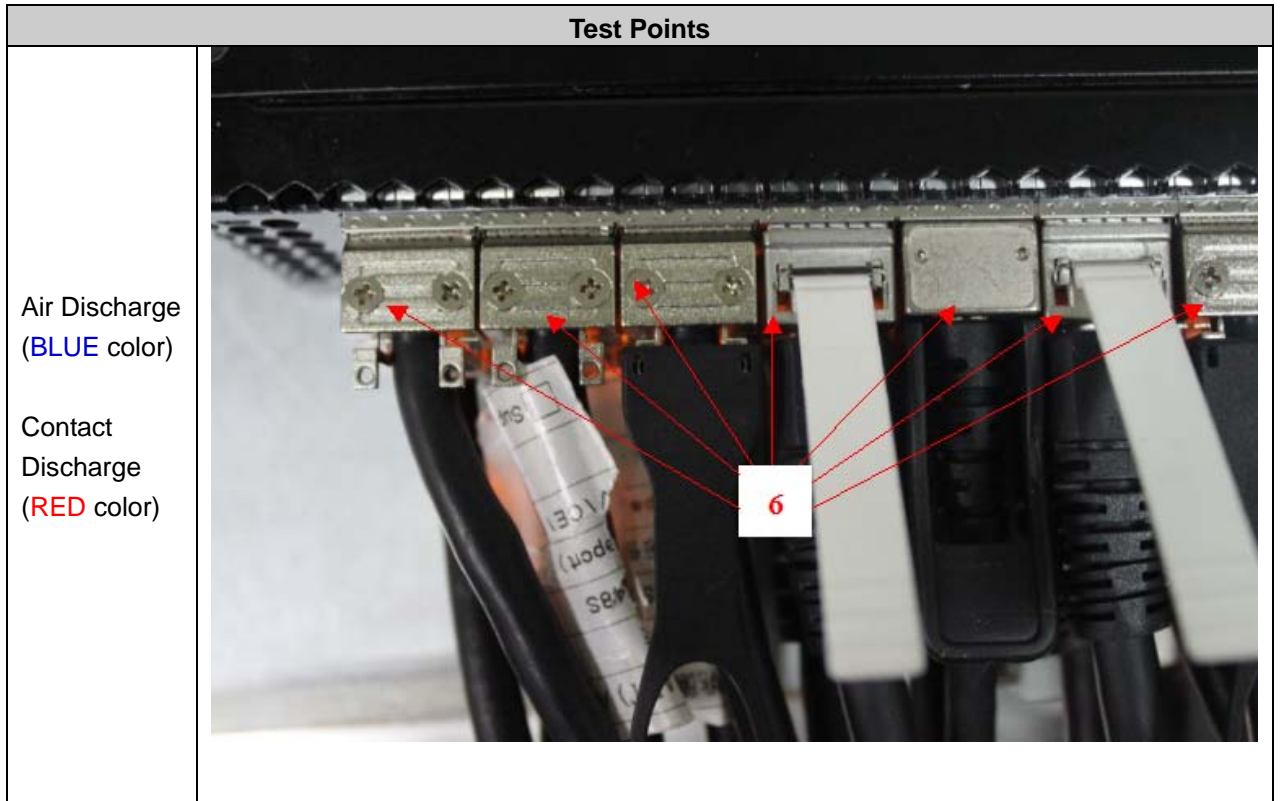


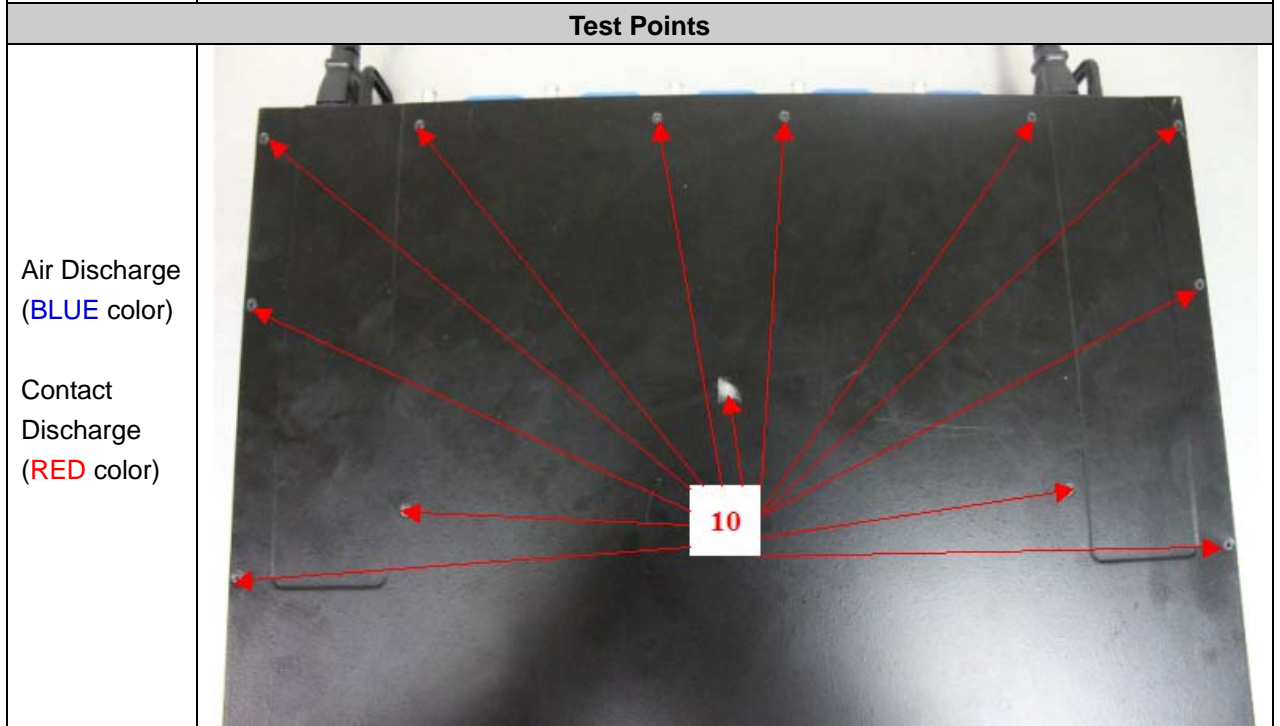
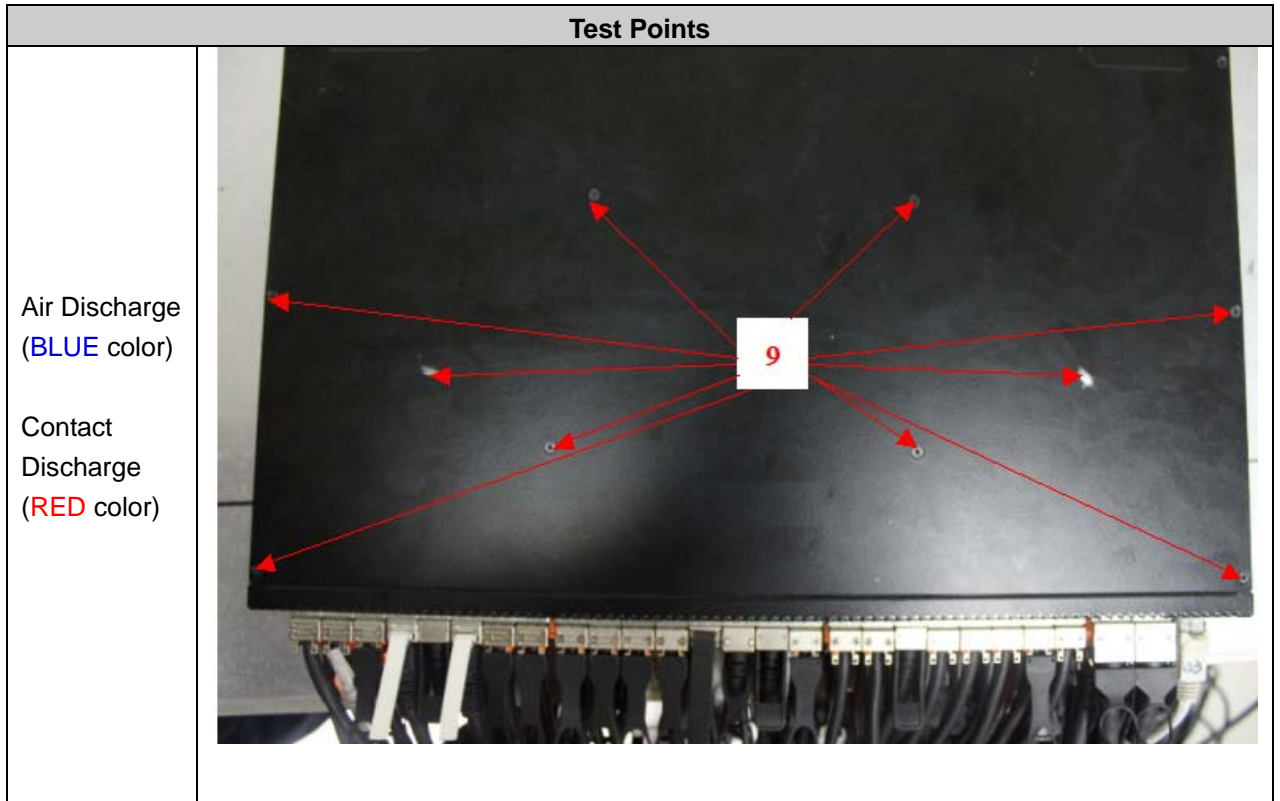


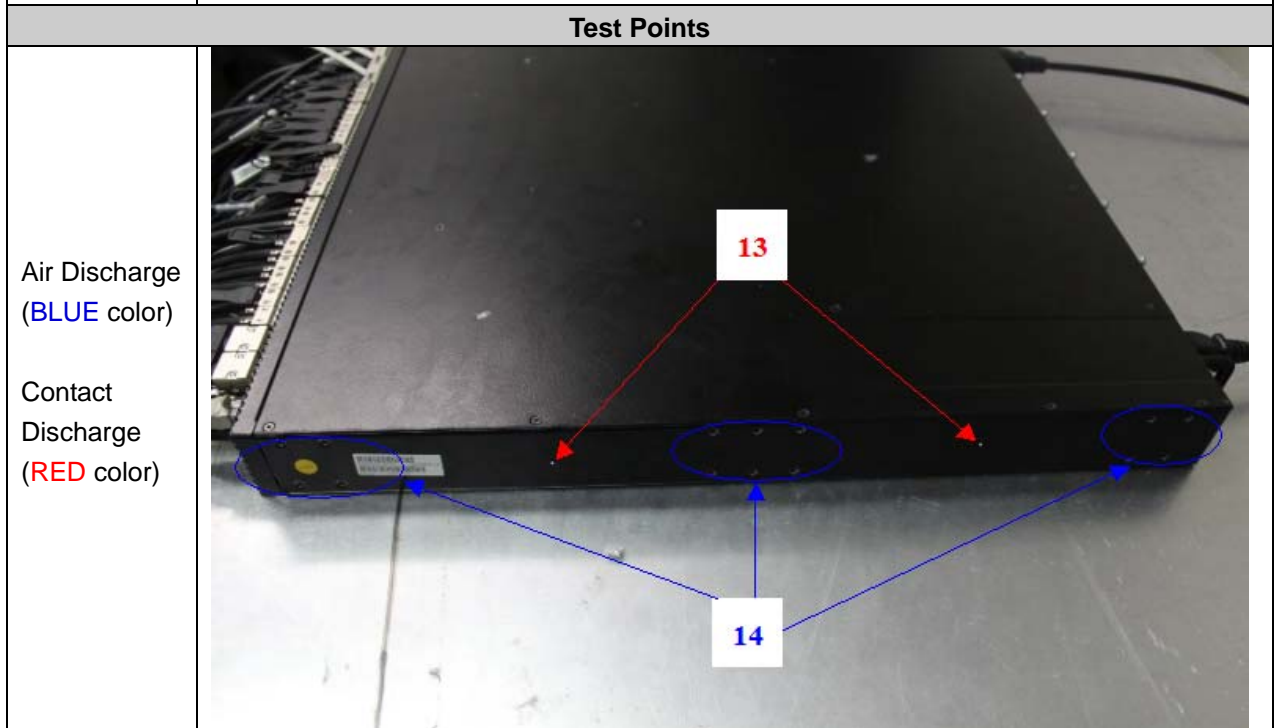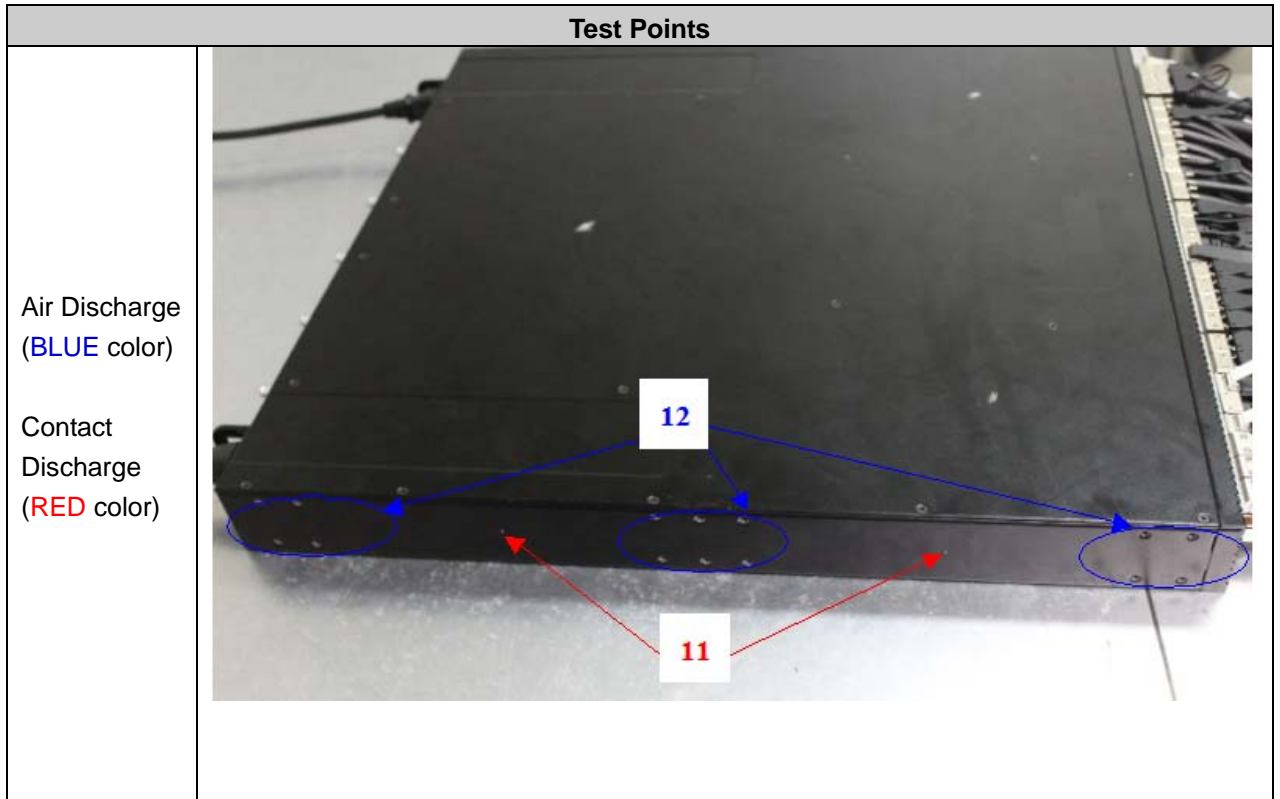

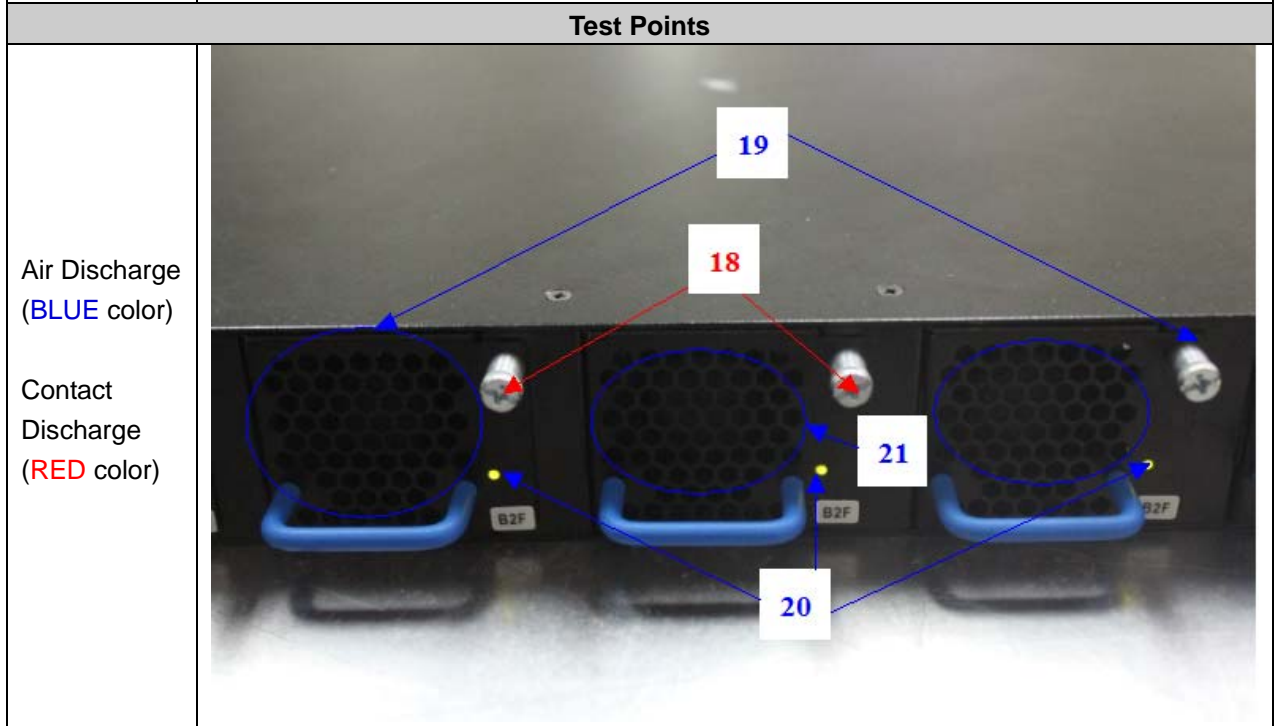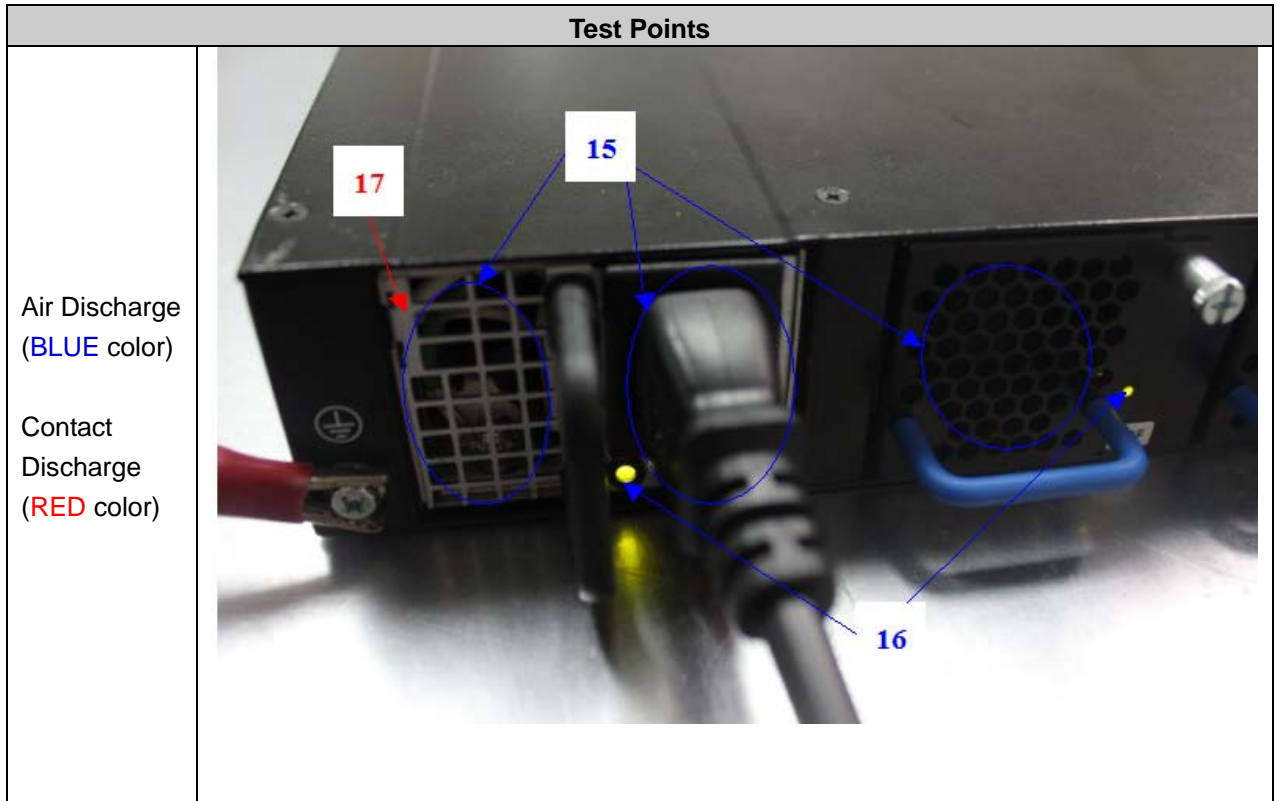

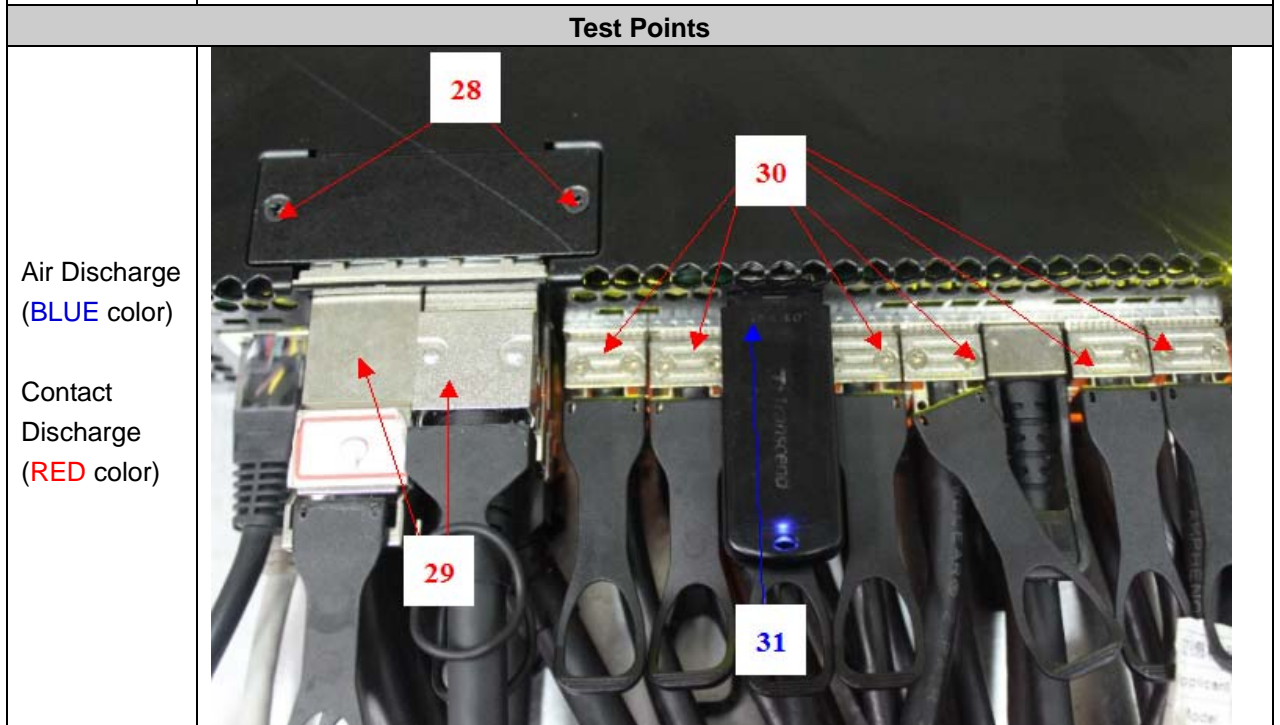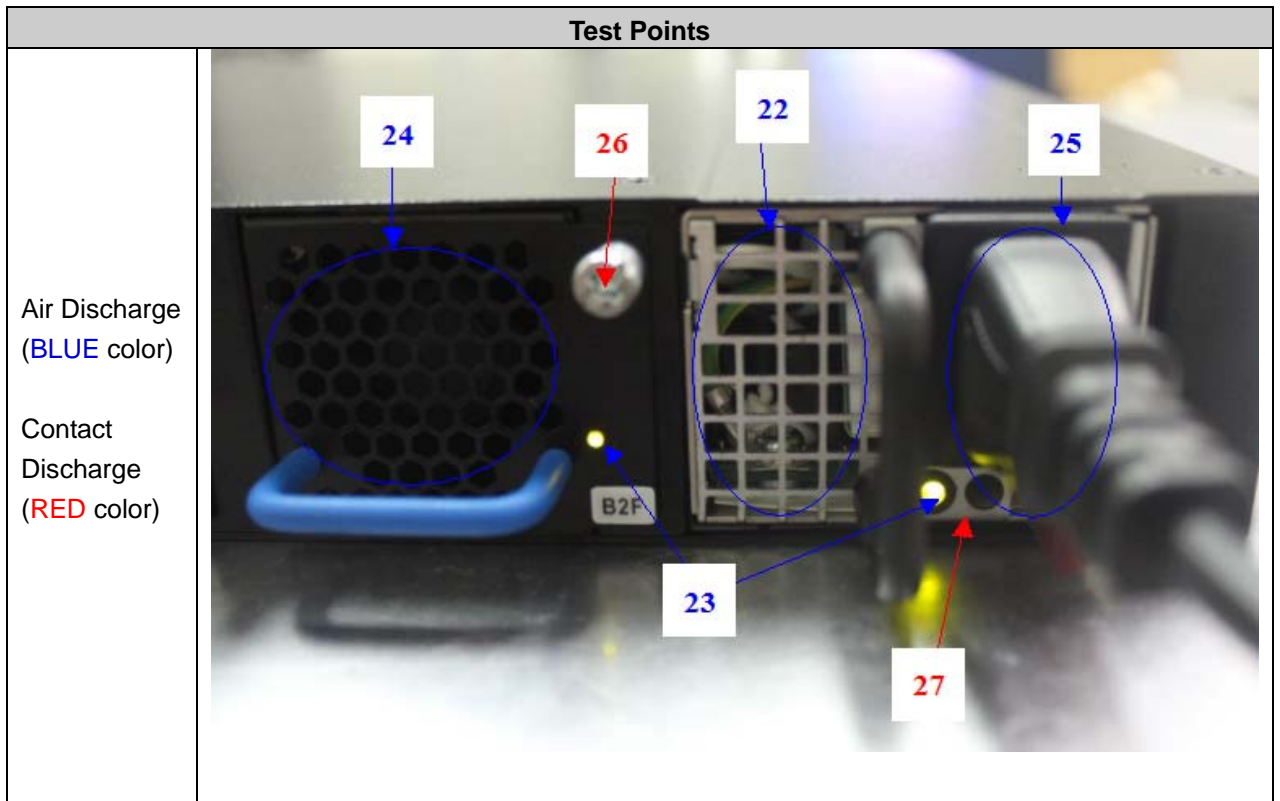

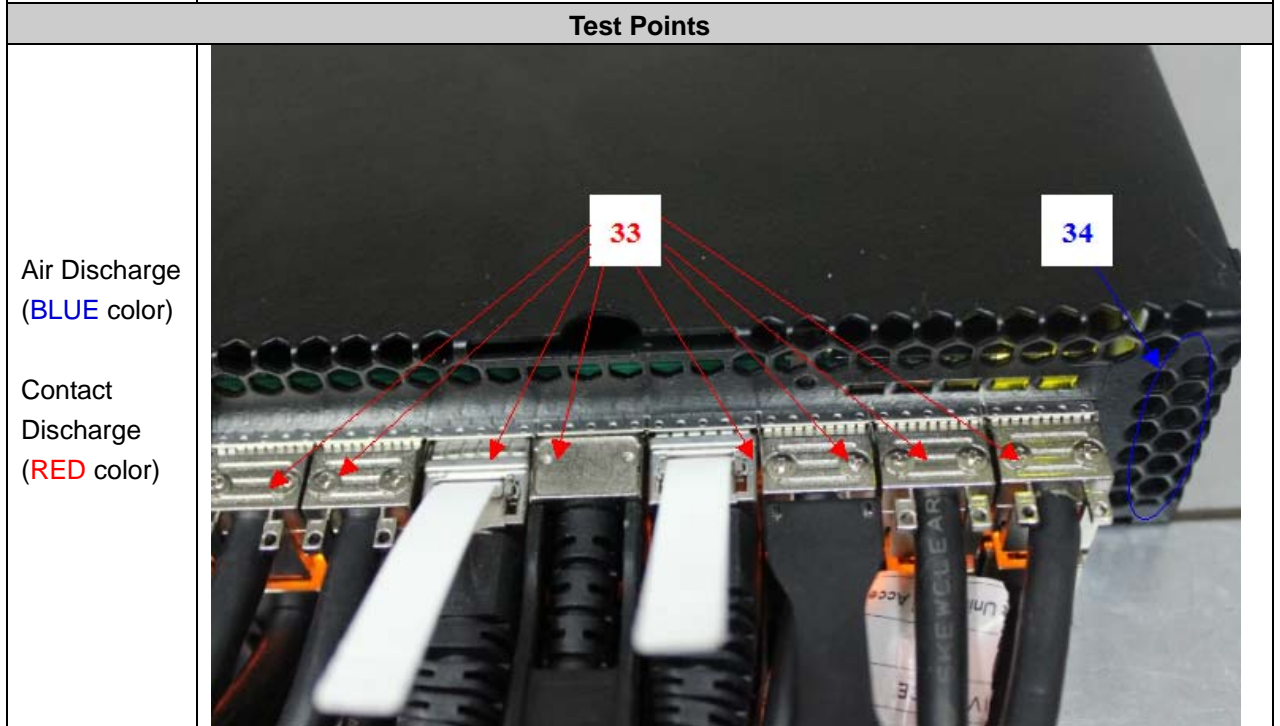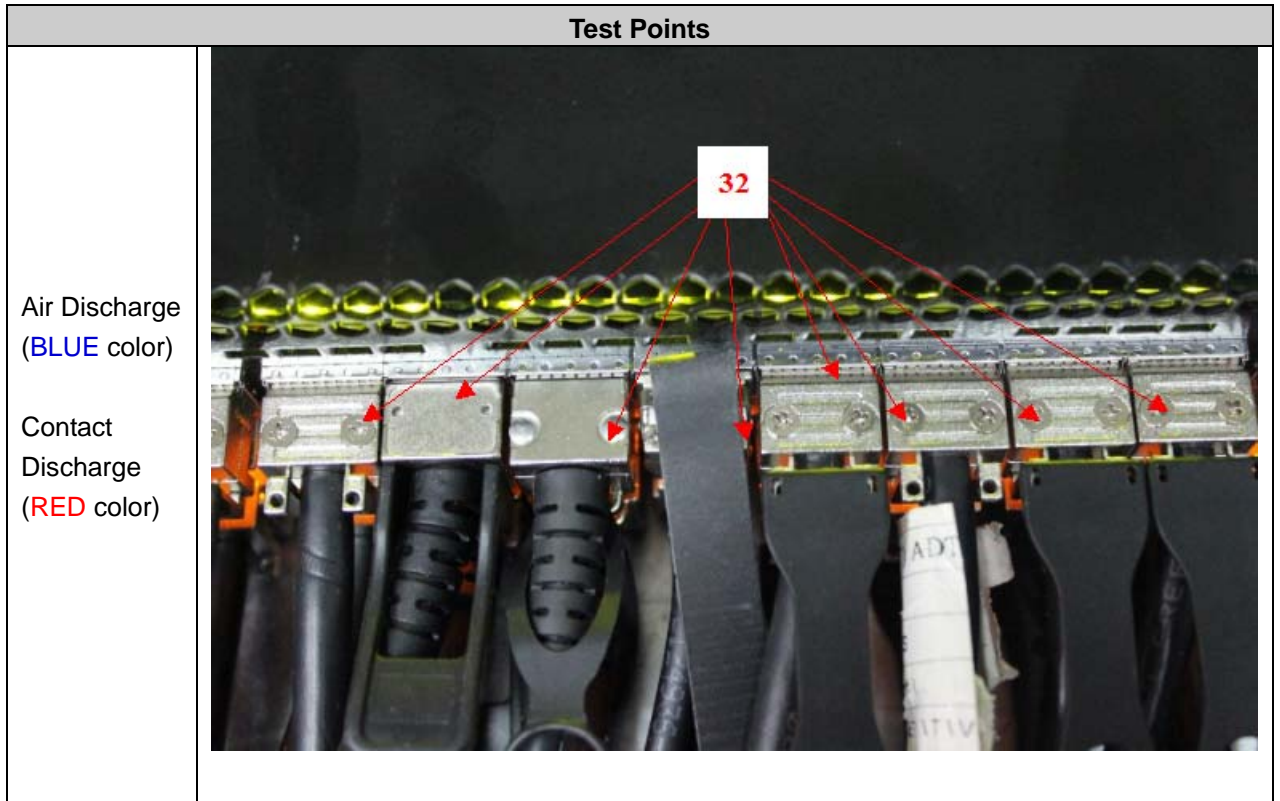

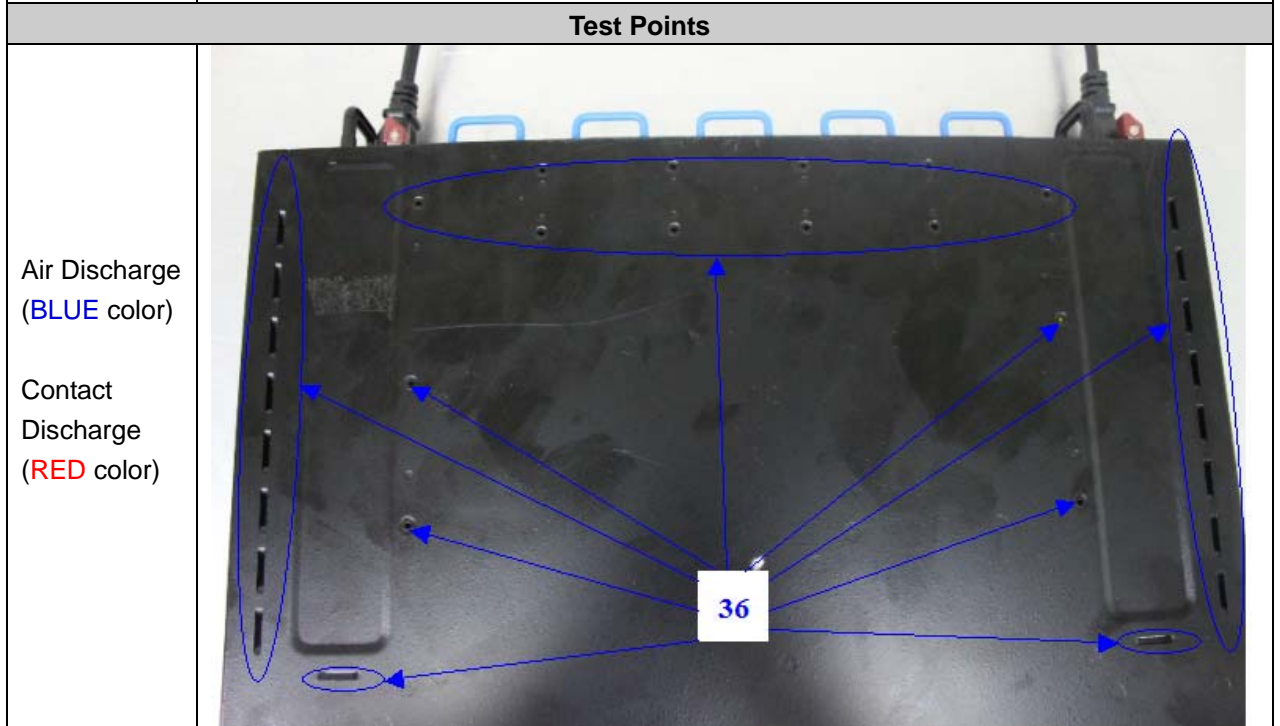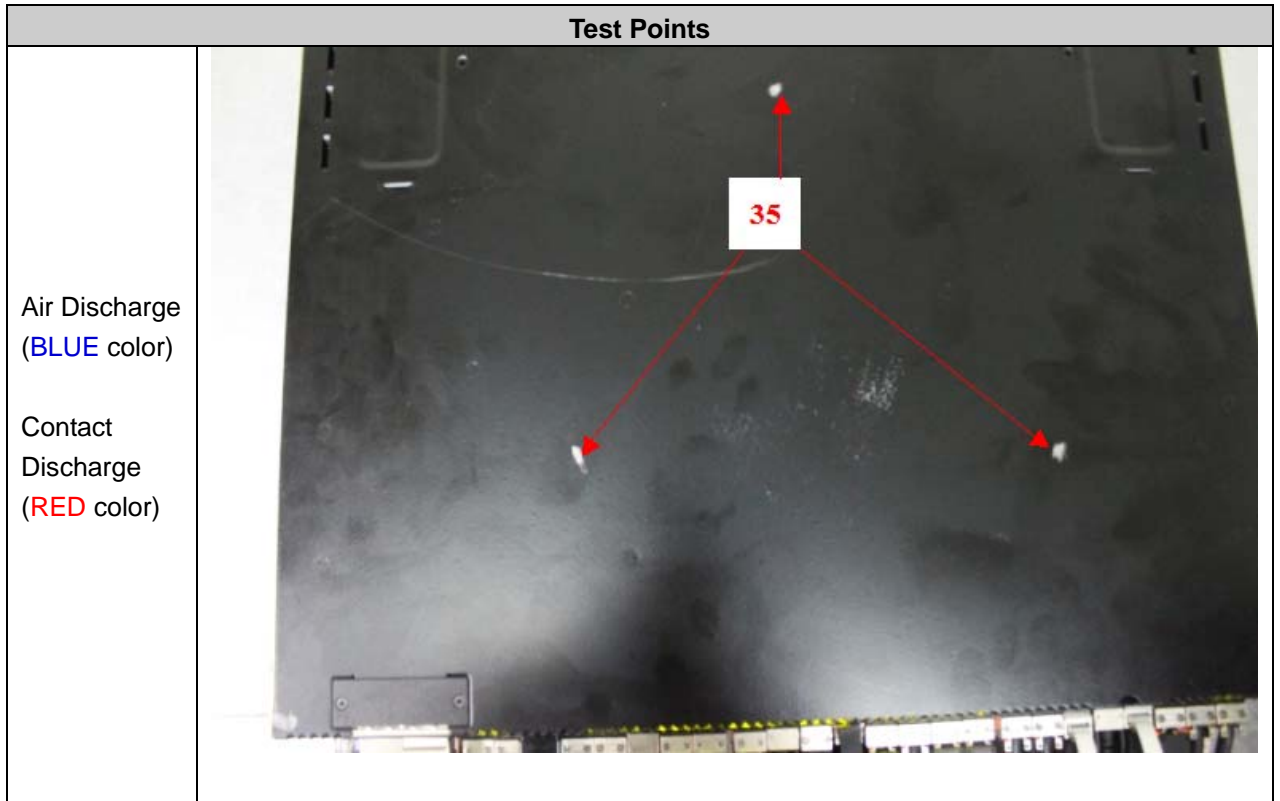


11. Radio Frequency Electromagnetic Field Immunity Test (RS)

11.1. Test Specification

| | |
|--------------------|--|
| Reference Standard | IEC 61000-4-3 |
| Frequency Range | 80 MHz to 1,000 MHz |
| Field Strength | 3 V/m (un-modulated, r.m.s) 80% AM (1 kHz) |
| Frequency Step | 1 % |
| Dwell Time | 2.9 sec |
| Antenna Polarity | Vertical / Horizontal |

11.2. Test Setup

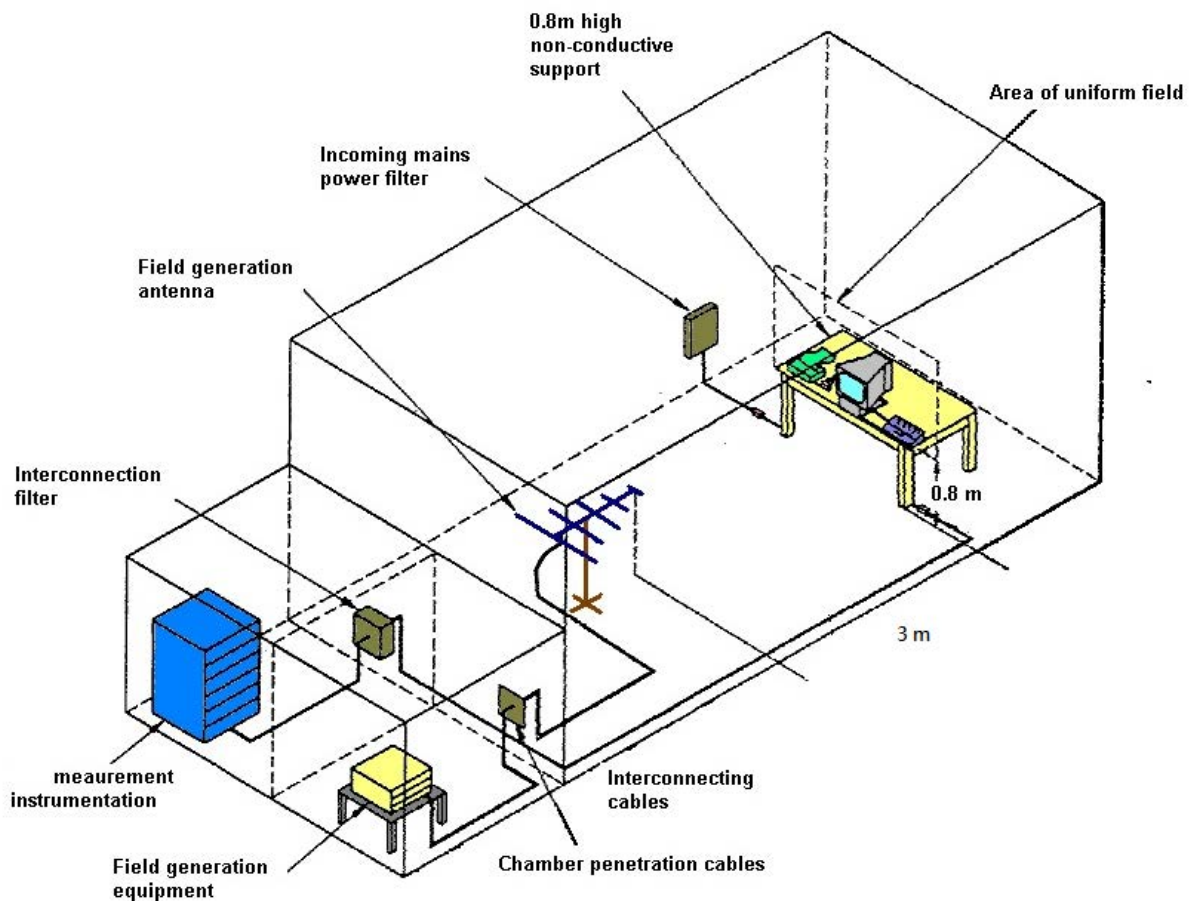

The procedure defined in this part requires the generation of electromagnetic fields within which the test sample is placed and its operation observed. To generate fields that are useful for simulation of actual (field) conditions may require significant antenna drive power and the resultant high field strength levels.

11.3. Test Procedure

- a. The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
- b. The bilog antenna which is enabling the complete frequency range of 80-1,000 MHz is placed 3m away from the equipment. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable antennae.
- c. The test is normally performed with the generating antenna facing each of four sides of the EUT. The polarization of the field generated by the broadband (bilog) antenna necessitates testing each position twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.
- d. At each of the above conditions, the frequency range is swept 80-1,000 MHz, pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of 1.5×10^{-3} decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.

11.4. Test Result

| | | | |
|----------------------|--|----------------------|---------------|
| Temperature | 24°C | Humidity | 52% |
| Pressure | 100 kPa | Test Engineer | Da Deng |
| Test Mode | Mode 1~Mode 2 | Test Date | Apr. 07, 2016 |
| Standard | Required Criteria A | | |
| Test Recorded | There was no abnormal situation during the test compared with initial operation. | | |


| Frequency Range MHz | Field V/m | Antenna Polarization | EUT Face Exposed | Performance Criteria |
|------------------------|--------------|-------------------------|-----------------------|-------------------------|
| 80~1,000 | 3 | Vertical | Front/Back/Right/Left | A |
| 80~1,000 | 3 | Horizontal | Front/Back/Right/Left | A |

12. Electrical Fast Transient/Burst Immunity Test (EFT/BURST)

12.1. Test Specification

| | |
|--------------------------------|--|
| Reference Standard | IEC 61000-4-4 |
| Test Voltage | AC Power Line: ± 1 kV |
| | Telecommunication/Signal Line: ± 0.5 kV |
| Polarity | Positive / Negative |
| Rise time of the pulses | 5 ns |
| Impulse duration | 50 ns |
| Burst duration | 15 ms for 5 kHz |
| Burst period | 300 ms |
| Impulse Frequency | Power: 5 kHz |
| | Telecommunication/Signal: 5 kHz (Except xDSL equipment) |
| Duration | 1 min |

12.2. Test Setup

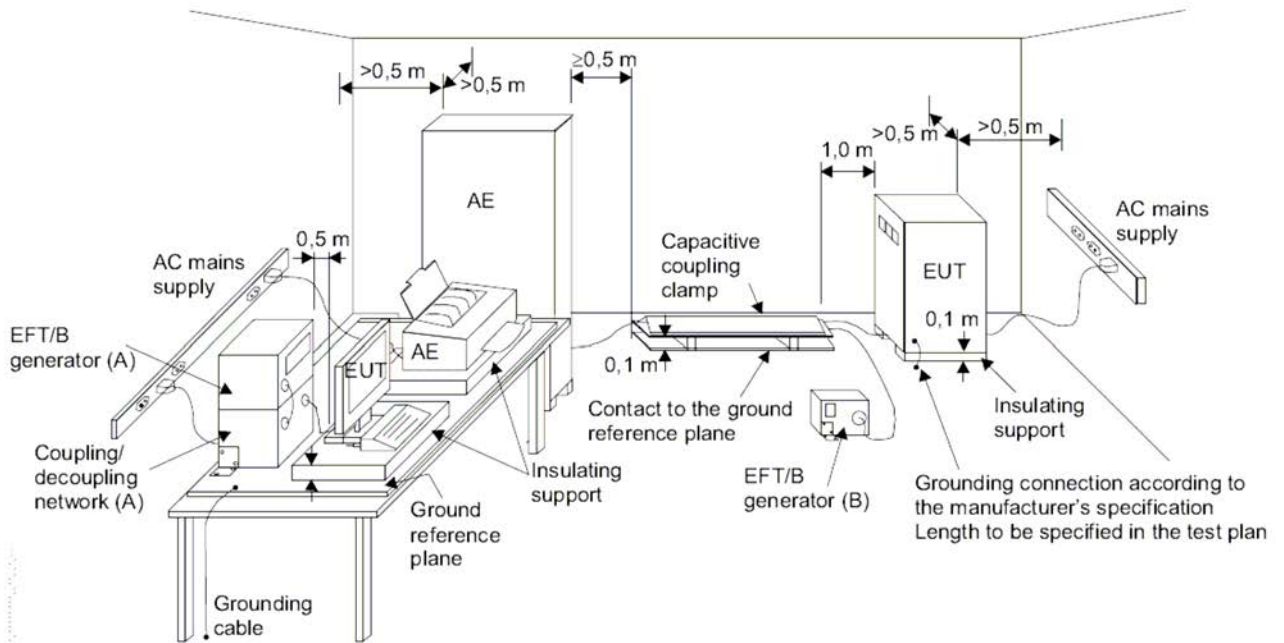

IEC 645/12

The EUT was placed on a ground reference plane and was insulated from it by an insulating support about 0.1m thick. If the EUT is table-top equipment, it was located approximately 0.8 m above the GRP. The GRP. Was a metallic sheet (copper or aluminum) of 0.25 mm ,minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. It shall project beyond the EUT by at least 0.1 m on all sides and connected to the protective earth. In the SPORTON EMC LAB. We provided 1 mm thickness aluminum ground reference plane or 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 1 m x 1 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system. The EUT was arranged and connected according to its functional requirements. The minimum distance between the EUT and other conductive structures, except the GRP. Beneath the EUT, was more than 0.5 m. Using the coupling clamp, the minimum distance between the coupling plates and all other conductive structures, except the GRP. Beneath the EUT, was more than 0.5 m. The length of the signal and power lines between the coupling device and the EUT was 0.5m or less.

12.3. Test Procedure

- a. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:
 - ambient temperature: 15°C to 35°C;
 - relative humidity : 45% to 75%;
 - atmospheric pressure : 86 kPa (860 mbar) to 106 kPa (1060 mbar).
- b. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
- c. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
- d. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria :
 - Normal performance within the specification limits.
 - Temporary degradation or loss of function or performance which is self-recoverable.
 - Temporary degradation or loss of function or performance which requires operator intervention or system reset.
 - Degradation or loss of function which is not recoverable due to damage of equipment (components).

12.4. Test Result

| | | | |
|----------------------|--|----------------------|---------------|
| Temperature | 19°C | Humidity | 65% |
| Pressure | 100 kPa | Test Engineer | Hank Yang |
| Test Mode | Mode 1~Mode 4 | Test Date | Mar. 31, 2016 |
| Standard | Required Criteria B | | |
| Test Recorded | There was no abnormal situation during the test compared with initial operation. | | |

AC Power Port :

| AC Phase | Test Voltage (kV) |
|----------|-------------------|
| | ±1 kV |
| L | A |
| N | A |
| PE | A |
| L-N-PE | A |

Telecommunication Port :


| Telecommunication Port | Test Voltage (kV) |
|------------------------|-------------------|
| | ±0.5 kV |
| LAN 1 | A |
| DAC Port 1 | A |
| DAC Port 49 | A |

13. Surge Immunity Test

13.1. Test Specification

| | |
|--------------------------------|---|
| Reference Standard | IEC 61000-4-5 |
| Test Voltage | AC Power Port: \pm 0.5, 1, 2 kV |
| Polarity | Positive / Negative |
| Wave Shape | 1.2/50 us Open-circuit voltage 8/20 us Short-circuit current |
| Phase Angle | 0° , 90° , 180° , 270° |
| Time between successive pulses | 60 sec. |
| Number of test | 5 positive and 5 negative |

13.2. Test Setup

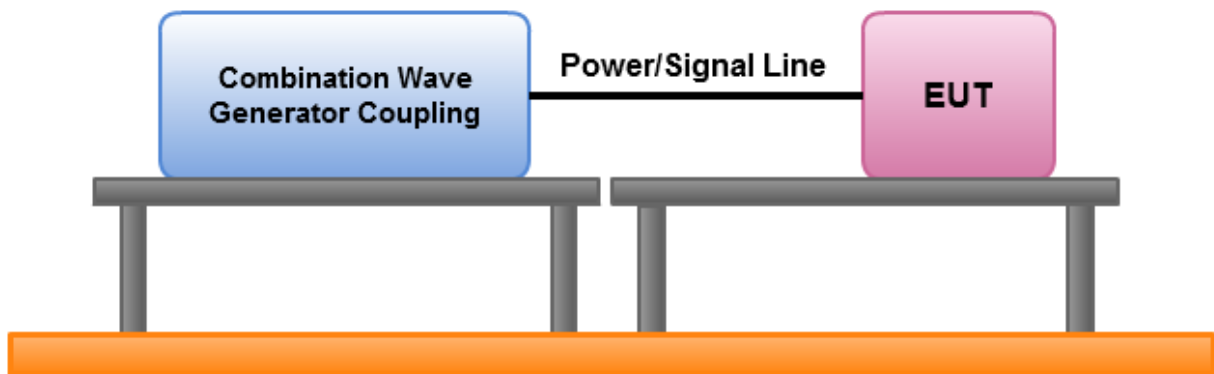

13.3. Test Procedure

- a. Climatic conditions
The climatic conditions shall comply with the following requirements :
 - ambient temperature : 15 °C to 35 °C
 - relative humidity : 10 % to 75 %
 - atmospheric pressure : 86 kPa to 106 kPa (860 mbar to 1060 mbar)
- b. Electromagnetic conditions
The electromagnetic environment of the laboratory shall not influence the test results.
- c. The test shall be performed according the test plan that shall specify the test set-up with
 - generator and other equipment utilized;
 - test level (voltage/current);
 - generator source impedance;
 - internal or external generator trigger;
 - number of tests: at least five positive and five negative at the selected points;
 - repetition rate: maximum 1/min.
 - inputs and outputs to be tested;
 - representative operating conditions of the EUT;
 - sequence of application of the surge to the circuit;
 - phase angle in the case of a.c. power supply;
 - actual installation conditions, for example :
 - AC : neutral earthed,
 - DC : (+) or (-) earthed to simulated the actual earthing conditions.
- d. If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the a.c. voltage wave (positive and negative).
- e. The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.
- f. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan.
- g. If the actual operating signal sources are not available, they may be simulated. Under no circumstances may the test level exceed the product specification. The test shall be carried out according the a test plan.
- h. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied. For acceptance test a previously unstressed equipment shall be used to the protection devices shall be replaced.

13.4. Test Result

| | | | |
|----------------------|--|----------------------|----------------------|
| Temperature | 19°C | Humidity | 65% |
| Pressure | 100 kPa | Test Engineer | Jimmy Chen / Ryo Fan |
| Test Mode | Mode 1~Mode 4 | Test Date | Mar. 31, 2016 |
| Standard | Required Criteria B | | |
| Test Recorded | There was no abnormal situation during the test compared with initial operation. | | |

AC Power Port:

| Voltage (kV) | Test Location | Polarity | Phase Angle | | | |
|--------------------|---------------|----------|-------------|-----|------|------|
| | | | 0° | 90° | 180° | 270° |
| 0.5 kV, 1 kV | L - N | + | A | A | A | A |
| | | - | A | A | A | A |
| 0.5 kV, 1 kV, 2 kV | L - PE | + | A | A | A | A |
| | | - | A | A | A | A |
| | N - PE | + | A | A | A | A |
| | | - | A | A | A | A |


Remark : PE = Earth reference

14. Conducted Disturbances Induced by Radio-Frequency Field Immunity Test (CS)

14.1. Test Specification

| | |
|--------------------|---|
| Reference Standard | IEC 61000-4-6 |
| Frequency Range | 150 kHz~80 MHz |
| Field Strength | 3 Vr.m.s (un-modulated, r.m.s) 80% AM (1 kHz) |
| Frequency Step | 1 % |
| Dwell Time | 2.9 sec |
| Coupling mode | CDN016(M3), CDN T8-10, Clamp |

14.2. Test Setup

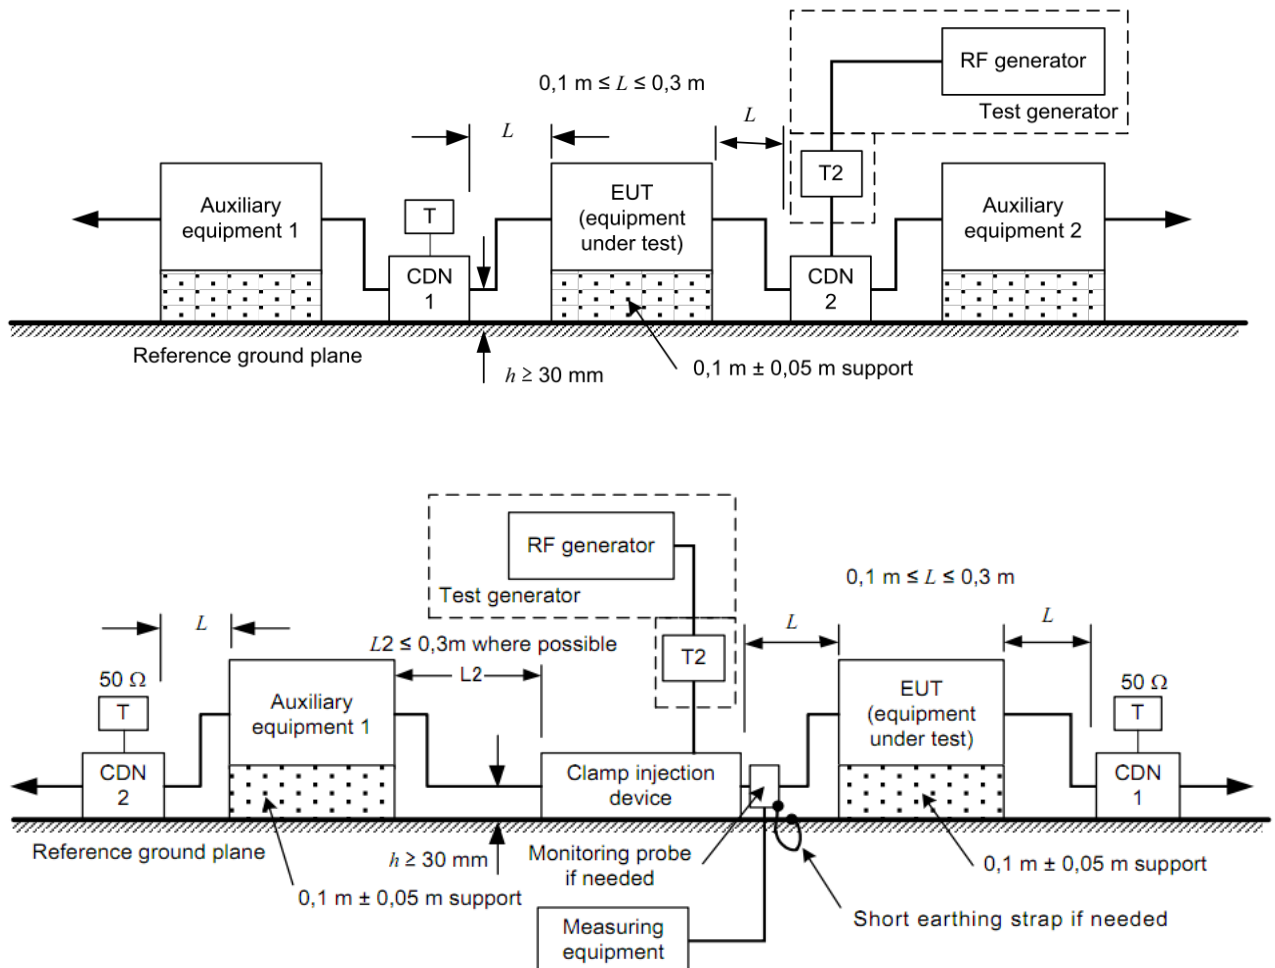

14.3. Test Procedure

- a. The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- b. This test method test can be performed without using a self-shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- d. The frequency range is swept from 150 kHz to 80 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1kHz sinewave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- e. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency(ies) and harmonics or frequencies of dominant interest shall be analyzed separately.
- f. In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter 1% of preceding frequency value shall take precedence.
- g. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.
- h. The use of special exercising programs is recommended.
- i. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- j. It may be necessary to carry out some investigatory testing in order to establish some aspects of the test plan.

14.4. Test Result

| | | | |
|----------------------|--|----------------------|---------------|
| Temperature | 19°C | Humidity | 65% |
| Pressure | 100 kPa | Test Engineer | Hank Yang |
| Test Mode | Mode 1~Mode 4 | Test Date | Mar. 31, 2016 |
| Standard | Required Criteria A | | |
| Test Recorded | There was no abnormal situation during the test compared with initial operation. | | |


| Frequency Range MHz | V (r.m.s) | CDN | Coupling port | Performance Criteria |
|--------------------------------|------------------|------------|----------------------|---------------------------------|
| 0.15 ~ 80 | 3 | M016(M3) | AC | A |
| 0.15 ~ 80 | 3 | T8-10 | LAN 1: 1Gbps | A |
| 0.15 ~ 80 | 3 | Clamp | DAC Port 1: 10Gbps | A |
| 0.15 ~ 80 | 3 | Clamp | DAC Port 49: 40Gbps | A |

15. Power Frequency Magnetic Field Immunity Tests

15.1. Test Specification

| | |
|--------------------|---------------|
| Reference Standard | IEC 61000-4-8 |
| Frequency Range | 50 Hz |
| Field Strength | 1 A/m |
| Observation type | 1 min |
| Inductance Coil | 1 m x 1 m |

15.2. Test Setup

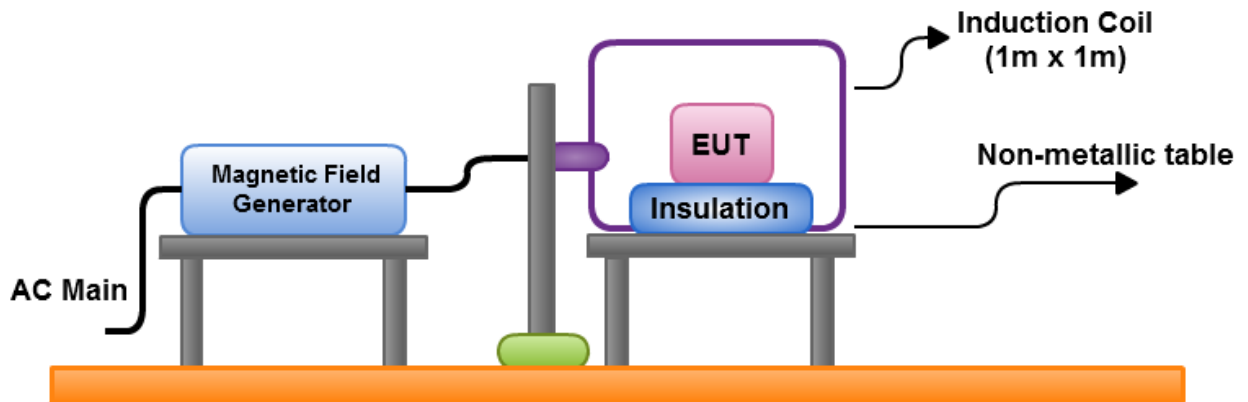

15.3. Test Procedure

- a. The equipment is configured and connected to satisfy its functional requirements.
- b. The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- c. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

15.4. Test Result

| | | | |
|----------------------|--|----------------------|----------------------|
| Temperature | 19°C | Humidity | 65% |
| Pressure | 100 kPa | Test Engineer | Jimmy Chen / Ryo Fan |
| Test Mode | Mode 1~Mode 2 | Test Date | Mar. 31, 2016 |
| Standard | Required Criteria A | | |
| Test Recorded | There was no abnormal situation during the test compared with initial operation. | | |


| Power Frequency Magnetic Field | Testing duration | Coil Orientation | Performance Criteria |
|---|-------------------------|-------------------------|-----------------------------|
| 50 Hz, 1 A/m | 1.0 Min | X-axis | A |
| 50 Hz, 1 A/m | 1.0 Min | Y-axis | A |
| 50 Hz, 1 A/m | 1.0 Min | Z-axis | A |

16. Voltage Dips and Voltage Interruptions Immunity Tests

16.1. Test Specification

| | |
|--------------------------------|--------------------------------|
| Reference Standard | IEC 61000-4-11 |
| Test Voltage | Voltage Dip : |
| | 1. >95%, Reduction, 0.5 period |
| | 2. 30%, Reduction, 25 period |
| | Voltage interruptions |
| | 3. >95%, Reduction, 250 period |
| Test Duration Time | 3 times |
| Intervals between event | 10 sec. |
| Test Angle | 0, 180° |

16.2. Test Setup

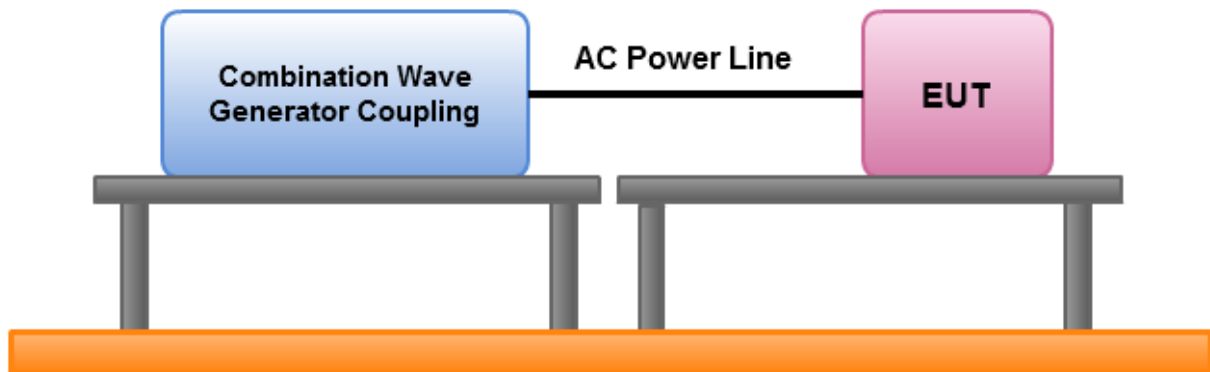

16.3. Test Conditions

1. Source voltage and frequency: 100/230/240V / 50Hz, Single phase.
2. Test of interval: 10 sec.
3. Level and duration: Sequency of 3 dips/interrupts.
4. Voltage rise (and fall) time: 1 ~ 5 μ s.

16.4. Test Result

| | | | |
|----------------------|--|----------------------|----------------------|
| Temperature | 19°C | Humidity | 65% |
| Pressure | 100 kPa | Test Engineer | Jimmy Chen / Ryo Fan |
| Test Mode | Mode 1/Mode 3 | Test Date | Mar. 31, 2016 |
| Standard | Required Criteria B/C/C | | |
| Test Recorded | The EUT had " Left of a power outage " situation happened during the test, but it will automatically return to normal conditions after the test. | | |

Voltage Dip & Interruption :

| Voltage (V) | Frequency (Hz) | % Reduction | Periods | ms | Performance Criteria |
|-------------|----------------|-------------|---------|-------|----------------------|
| 100 | 50 | >95 % | 0.5 | 10 | A |
| | | 30 % | 25 | 500 | A |
| | | >95% | 250 | 5,000 | B |

| Voltage (V) | Frequency (Hz) | % Reduction | Periods | ms | Performance Criteria |
|-------------|----------------|-------------|---------|-------|----------------------|
| 230 | 50 | >95 % | 0.5 | 10 | A |
| | | 30 % | 25 | 500 | A |
| | | >95% | 250 | 5,000 | B |

| Voltage (V) | Frequency (Hz) | % Reduction | Periods | ms | Performance Criteria |
|-------------|----------------|-------------|---------|-------|----------------------|
| 240 | 50 | >95 % | 0.5 | 10 | A |
| | | 30 % | 25 | 500 | A |
| | | >95% | 250 | 5,000 | B |

| | | | |
|----------------------|---|----------------------|----------------------|
| Temperature | 19°C | Humidity | 65% |
| Pressure | 100 kPa | Test Engineer | Jimmy Chen / Ryo Fan |
| Test Mode | Mode 2/Mode 4 | Test Date | Mar. 31, 2016 |
| Standard | Required Criteria B/C/C | | |
| Test Recorded | The EUT had "Right of a power outage" situation happened during the test, but it will automatically return to normal conditions after the test. | | |

Voltage Dip & Interruption :

| Voltage (V) | Frequency (Hz) | % Reduction | Periods | ms | Performance Criteria |
|-------------|----------------|-------------|---------|-------|----------------------|
| 100 | 50 | >95 % | 0.5 | 10 | A |
| | | 30 % | 25 | 500 | A |
| | | >95% | 250 | 5,000 | B |

| Voltage (V) | Frequency (Hz) | % Reduction | Periods | ms | Performance Criteria |
|-------------|----------------|-------------|---------|-------|----------------------|
| 230 | 50 | >95 % | 0.5 | 10 | A |
| | | 30 % | 25 | 500 | A |
| | | >95% | 250 | 5,000 | B |

| Voltage (V) | Frequency (Hz) | % Reduction | Periods | ms | Performance Criteria |
|-------------|----------------|-------------|---------|-------|----------------------|
| 240 | 50 | >95 % | 0.5 | 10 | A |
| | | 30 % | 25 | 500 | A |
| | | >95% | 250 | 5,000 | B |

17. List of Measuring Equipment Used

<EMI>

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|-----------------------------------|---------------|---------------------|-------------------|-------------------|------------------|--------------------------|
| EMI Receiver | Agilent | N9038A | My52260123 | 9kHz ~ 8.45GHz | Jan. 27, 0216 | Conduction (CO01-CB) |
| LISN | F.C.C. | FCC-LISN-50-16-2 | 04083 | 150kHz ~ 100MHz | Dec. 08, 2015 | Conduction (CO01-CB) |
| LISN | Schwarzbeck | NSLK 8127 | 8127647 | 9kHz ~ 30MHz | Dec. 23, 2015 | Conduction (CO01-CB) |
| Impedance Stabilization Network | Teseq | ISN T800 | 24557 | 150kHz ~ 230MHz | Oct. 27, 2015 | Conduction (CO01-CB) |
| COND Cable | Woken | Cable | 01 | 150kHz ~ 30MHz | May 25, 2015 | Conduction (CO01-CB) |
| Software | Audix | E3 | 6.120210n | - | N.C.R. | Conduction (CO01-CB) |
| 10m Semi Anechoic Chamber | TDK | NSA | 10CH01-CB | 30MHz~1GHz 10m | Mar. 30, 2016 | Radiation (10CH01-CB) |
| 10m Semi Anechoic Chamber | TDK | VSWR | 10CH01-CB | 1GHz ~40GHz 3m | Nov. 24, 2015 | Radiation (10CH01-CB) |
| Pre-Amplifier | Agilent | 8447D | 2944A10783 | 9kHz ~ 1.3GHz | Mar. 24, 2016 | Radiation (10CH01-CB) |
| Pre-Amplifier | Agilent | 8447D | 2944A10784 | 9kHz ~ 1.3GHz | Mar. 09, 2016 | Radiation (10CH01-CB) |
| Low Cable | Woken | SUCOFLEX 104 | - | 25MHz ~ 1GHz | Nov. 30, 2015 | Radiation (10CH01-CB) |
| High Cable | Woken | SUCOFLEX 104 | - | 25MHz ~ 1GHz | Nov. 30, 2015 | Radiation (10CH01-CB) |
| Bilog Antenna with 6dB Attenuator | Chase & EMCI | CBL6111A &N-6-06 | 1543 &AT-N0604 | 30MHz ~ 1GHz | Jan. 13, 2016 | Radiation (10CH01-CB) |
| Log Antenna | Schwarzbeck | VUSLP 9111 | 247 | 200MHz ~ 1GHz | Apr. 23, 2015 | Radiation (10CH01-CB) |
| EMI Test Receiver | Rohde&Schwarz | ESCI | 100186 | 9kHz ~ 3GHz | Jul. 14, 2015 | Radiation (10CH01-CB) |
| Spectrum Analyzer | Rohde&Schwarz | FSV30 | 101026 | 9kHz ~ 30GHz | Jan. 04, 2016 | Radiation (10CH01-CB) |
| Horn Antenna | ESCO | 3117 | 00081283 | 1GHz ~ 18GHz | Nov. 25, 2015 | Radiation (10CH01-CB) |
| Amplifier | Agilent | 8449B | 3008A02660 | 1GHz ~ 26.5GHz | May 25, 2015 | Radiation (10CH01-CB) |
| CABLE(1~40G) | Woken | SUCOFLEX 104 | - | 1GHz ~ 40GHz | Nov. 30, 2015 | Radiation (10CH01-CB) |

| | | | | | | |
|----------|-------|----|-----------|---|--------|--------------------------|
| Software | Audix | E3 | 6.120210m | - | N.C.R. | Radiation (10CH01-CB) |
|----------|-------|----|-----------|---|--------|--------------------------|

※ Calibration Interval of instruments listed above is one year.

※ N.C.R. means Non-Calibration required.

<EMS>

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|-----------------------------------|--------------|---------------------------|--------------|---|------------------|---------------------|
| Harmonic/Flicker | Schaffner | CCN 1000-1 | 1306A00130 | N/A | Mar. 23, 2016 | Harmonic/Flicker |
| Software | Teseq | WIN2100V3 | - | - | N.C.R. | Harmonic/Flicker |
| ESD Simulator | Teseq QG | NSG 437 | 314 | Air: 0 kV ~ 30 kV, Contact: 0 kV ~ 30kV | Mar. 25, 2016 | ESD |
| Integrated Measurement System | R&S | IMS | 100002 | 9kHz ~ 3GHz | Apr. 24, 2015 | RS |
| Average Power Sensor | R&S | NRP-Z91 | 101117 | 9kHz ~ 6GHz | Mar. 29, 2016 | RS |
| RF Power Amplifier | AR | 250W1000A | 0323202 | 80MHz ~1GHz, 250W | Mar. 31, 2016 | RS |
| Log-Periodic Antenna | AR | AT1080 | 0323130 | 80MHz ~ 1GHz | N.C.R. | RS |
| Software | R&S | EMC32 | 5.20.1 | - | N.C.R. | RS |
| Surge/EFT/Dip Generator | Teseq AG | NSG 3060 | 1534 | Surge 0 ~ 6kV EFT 0 kV ~ 4.4 kV Dip 100~240V/ 50Hz /60Hz | Mar. 14, 2016 | Surge EFT Dip |
| Burst/EFT Dataline Coupling Clamp | Teseq AG | CDN 3425 | 1776 | 0.25kV~4kV | Jan. 28, 2016 | EFT |
| Surge Coupling Decoupling Network | Teseq AG | CDN HSS-2 | 34283 | 0.25kV~4kV | Jun. 08, 2015 | Surge |
| Software | Teseq AG | NSG3000 | - | - | N.C.R. | Surge/ EFT/Dip |
| Conducted Immunity Test System | SCHAFFNER | NSG2070 | 1091 | 100kHz ~ 250MHz, AM 1kHz 80% | Mar. 06, 2016 | CS |
| Coupling decoupling network | Teseq GmbH | CDN M016 | 34635 | 150kHz~80MHz | Mar. 30, 2016 | CS |
| Coupling decoupling network | Teseq GmbH | CDN T8-10 | 38993 | 150kHz~230MHz | Jan. 29, 2016 | CS |
| Clamp EM-Koppelzange | SCHAFFNER | KEMZ 801 | 17029 | 150kHz~230MHz | Aug. 31, 2015 | CS |
| Software | Tesq | NSG4070 | 030593.V1.28 | - | N.C.R. | CS |
| Magnetic field Immunity Loop | FCC | F-1000-4-8/9/ 10-L-1AM | 04014,04017 | 30A//CONTINUOUS , 100A/2Hrs, 230A/30SEC | Jul. 29, 2015 | Magnetic |

※ Calibration Interval of instruments listed above is one year.

※ N.C.R. means Non-Calibration required.

18. Uncertainty of Test Site

| Test Items | Uncertainty | Remark |
|-------------------------------|-------------|--------------------------|
| Conducted Emissions | 3.2 dB | Confidence levels of 95% |
| Radiated Emissions below 1GHz | 4.0 dB | Confidence levels of 95% |
| Radiated Emissions above 1GHz | 4.7 dB | Confidence levels of 95% |

Immunity Test Measurement Uncertainty

Electrostatic Discharge Immunity (ESD)

Negative Discharge Current

| From Standard | | | |
|----------------|--------------------|-----------------|-----------------|
| 2kV | First Peak Current | Current at 30ns | Current at 60ns |
| Nominal | 7.5 | 4.0 | 2.0 |
| Min. | 6.4 | 2.8 | 1.4 |
| Max. | 8.6 | 5.2 | 2.6 |
| Tolerance in % | 0.2 | 0.3 | 0.3 |

| From calibration certificate | | | | | | |
|------------------------------|-----------------------------|-------------------------|--------------------------|---------------------|--------------------------|---------------------|
| | Measured First Peak Current | 1st Peak Worst case +5% | Measured Current at 30ns | 30ns Worst case +5% | Measured Current at 60ns | 60ns Worst case +5% |
| Positive | 6.9 | 7.2 | 3.6 | 3.8 | 1.9 | 2.0 |
| Negative | 7.3 | 7.7 | 3.7 | 3.9 | 1.9 | 2.0 |
| Min. | | 6.4 | | 2.8 | | 1.4 |
| Max. | | 8.6 | | 5.2 | | 2.6 |

| From Standard | | | |
|----------------|--------------------|-----------------|-----------------|
| 4kV | First Peak Current | Current at 30ns | Current at 60ns |
| Nominal | 15.0 | 8.0 | 4.0 |
| Min. | 12.8 | 5.6 | 2.8 |
| Max. | 17.3 | 10.4 | 5.2 |
| Tolerance in % | 0.2 | 0.3 | 0.3 |

| From calibration certificate | | | | | | |
|------------------------------|-----------------------------|-------------------------|--------------------------|---------------------|--------------------------|---------------------|
| | Measured First Peak Current | 1st Peak Worst case +5% | Measured Current at 30ns | 30ns Worst case +5% | Measured Current at 60ns | 60ns Worst case +5% |
| Positive | 14.4 | 15.1 | 7.6 | 7.9 | 3.8 | 4.0 |
| Negative | 14.1 | 14.8 | 7.4 | 7.8 | 4.0 | 4.2 |
| Min. | | 12.8 | | 5.6 | | 2.8 |
| Max. | | 17.3 | | 10.4 | | 5.2 |

| From Standard | | | |
|----------------|--------------------|-----------------|-----------------|
| 6kV | First Peak Current | Current at 30ns | Current at 60ns |
| Nominal | 22.5 | 12.0 | 6.0 |
| Min. | 19.1 | 8.4 | 4.2 |
| Max. | 25.9 | 15.6 | 7.8 |
| Tolerance in % | 0.2 | 0.3 | 0.3 |

| From calibration certificate | | | | | | |
|------------------------------|-----------------------------|-------------------------|--------------------------|---------------------|--------------------------|---------------------|
| | Measured First Peak Current | 1st Peak Worst case -5% | Measured Current at 30ns | 30ns Worst case +5% | Measured Current at 60ns | 60ns Worst case +5% |
| Positive | 21.2 | 22.2 | 11.2 | 11.7 | 5.8 | 6.1 |
| Negative | 20.7 | 21.7 | 11.1 | 11.7 | 6.0 | 6.2 |
| Min. | | 19.1 | | 8.4 | | 4.2 |
| Max. | | 25.9 | | 15.6 | | 7.8 |

| From Standard | | | |
|----------------|--------------------|-----------------|-----------------|
| 8kV | First Peak Current | Current at 30ns | Current at 60ns |
| Nominal | 30.0 | 16.0 | 8.0 |
| Min. | 25.5 | 11.2 | 5.6 |
| Max. | 34.5 | 20.8 | 10.4 |
| Tolerance in % | 0.2 | 0.3 | 0.3 |

| From calibration certificate | | | | | | |
|------------------------------|-----------------------------|-------------------------|--------------------------|---------------------|--------------------------|---------------------|
| | Measured First Peak Current | 1st Peak Worst case -5% | Measured Current at 30ns | 30ns Worst case +5% | Measured Current at 60ns | 60ns Worst case +5% |
| Positive | 27.8 | 29.1 | 14.7 | 15.4 | 7.6 | 8.0 |
| Negative | 28.4 | 29.8 | 15.0 | 15.7 | 7.8 | 8.1 |
| Min. | | 25.5 | | 11.2 | | 5.6 |
| Max. | | 34.5 | | 20.8 | | 10.4 |

Negative Discharge Voltage

| Standard Parameters | | | | | Calculated Range | | |
|------------------------|----------|---------------|-----------|-----------|------------------|-----------|-----------|
| Indicated Voltage (kV) | Polarity | Tolerance (%) | Max. (kV) | Min. (kV) | Calibration (kV) | Max. (kV) | Min. (kV) |
| 2 | Positive | 15.0 | 2.3 | 1.7 | 2.0 | 2.0 | 2.0 |
| | Negative | 15.0 | 2.3 | 1.7 | 2.1 | 2.6 | 2.6 |
| 4 | Positive | 15.0 | 4.6 | 3.4 | 4.0 | 4.0 | 4.0 |
| | Negative | 15.0 | 4.6 | 3.4 | 4.1 | 4.1 | 4.1 |
| 6 | Positive | 15.0 | 6.9 | 5.1 | 6.0 | 6.0 | 6.0 |
| | Negative | 15.0 | 6.9 | 5.1 | 6.1 | 6.1 | 6.1 |
| 8 | Positive | 15.0 | 9.2 | 6.8 | 8.0 | 8.0 | 7.9 |
| | Negative | 15.0 | 9.2 | 6.8 | 8.1 | 8.1 | 8.1 |
| 15 | Positive | 15.0 | 17.3 | 12.8 | 15.2 | 15.2 | 15.2 |
| | Negative | 15.0 | 17.3 | 12.8 | 14.9 | 14.9 | 14.9 |

It has been demonstrated that the ESD generator meets the specified requirements in the standard with at least a 95% confidence.

Radio Frequency Electromagnetic Field Immunity (RS) IMS

| Frequency 10MHz Output Check | |
|------------------------------|----------------|
| Standard | Reading |
| 10 MHz | 9,999,985.8 Hz |

Frequency Accuracy/offset : 1.4E-07

Frequency Stability : 5E-09/1.0S

Uncertainty: 4.0E-06

| Gain Flatness Measurement (For 80 MHz to 1 GHz Amp.) | | |
|--|--------------|---------------|
| Freq. (MHz) | Reading (dB) | Expected (dB) |
| 80.0 | 62.6 | > 54 |
| 100.0 | 62.4 | > 54 |
| 200.0 | 61.6 | > 54 |
| 300.0 | 62.0 | > 54 |
| 400.0 | 58.8 | > 54 |
| 500.0 | 60.4 | > 54 |
| 600.0 | 58.4 | > 54 |
| 700.0 | 58.8 | > 54 |
| 800.0 | 59.3 | > 54 |
| 900.0 | 58.3 | > 54 |
| 1000.0 | 55.8 | > 54 |

| Gain Flatness Measurement (For 1 GHz to 3 GHz Amp.) | | |
|---|--------------|---------------|
| Freq. (GHz) | Reading (dB) | Expected (dB) |
| 0.8 | 47.6 | > 40 |
| 1.0 | 48.0 | > 40 |
| 1.5 | 47.9 | > 40 |
| 2.0 | 47.8 | > 40 |
| 2.5 | 46.4 | > 40 |
| 3.0 | 46.3 | > 40 |

| VSWR Measurement (input port) | | |
|-------------------------------|-------------|-----------------|
| Freq. (MHz) | Actual (dB) | Hige Range (dB) |
| 80.0 | 1.7 | < 2.00 |
| 100.0 | 1.5 | < 2.00 |
| 200.0 | 1.6 | < 2.00 |
| 300.0 | 1.5 | < 2.00 |
| 400.0 | 1.5 | < 2.00 |
| 500.0 | 1.4 | < 2.00 |
| 600.0 | 1.4 | < 2.00 |
| 700.0 | 1.4 | < 2.00 |
| 800.0 | 1.4 | < 2.00 |
| 900.0 | 1.5 | < 2.00 |
| 1000.0 | 1.4 | < 2.00 |

| Power Linearly Measurement | | | | | | | | |
|----------------------------|-----------------|------------------|-------------|-----------------|------------------|-------------|-----------------|------------------|
| Freq. (MHz) | Reading (Watts) | Standard (Watts) | Freq. (MHz) | Reading (Watts) | Standard (Watts) | Freq. (MHz) | Reading (Watts) | Standard (Watts) |
| 80.0 | 20.0 | 23.2 | 200.0 | 200.0 | 226.9 | 800.0 | 100.0 | 97.7 |
| 80.0 | 50.0 | 63.9 | 200.0 | 250.0 | 279.7 | 800.0 | 150.0 | 147.2 |
| 80.0 | 100.0 | 122.4 | 500.0 | 20.0 | 21.3 | 800.0 | 200.0 | 196.1 |
| 80.0 | 150.0 | 173.4 | 500.0 | 50.0 | 52.6 | 800.0 | 250.0 | 244.9 |
| 80.0 | 200.0 | 234.7 | 500.0 | 100.0 | 103.8 | 1000.0 | 20.0 | 16.5 |
| 80.0 | 250.0 | 302.2 | 500.0 | 150.0 | 155.4 | 1000.0 | 50.0 | 45.2 |
| 200.0 | 20.0 | 22.4 | 500.0 | 200.0 | 206.8 | 1000.0 | 100.0 | 87.3 |
| 200.0 | 50.0 | 58.3 | 500.0 | 250.0 | 258.1 | 1000.0 | 150.0 | 131.9 |
| 200.0 | 100.0 | 107.6 | 800.0 | 20.0 | 19.1 | 1000.0 | 200.0 | 175.9 |
| 200.0 | 150.0 | 166.7 | 800.0 | 50.0 | 48.6 | 1000.0 | 250.0 | 220.0 |

| Standard Power Measurement | | | | | |
|----------------------------|------------------|------------------|---------------------|------------------|------------------|
| For 80 MHz to 1 GHz | | | For 80 MHz to 1 GHz | | |
| Freq. | Expected (WATTS) | Standard (WATTS) | Freq. | Expected (WATTS) | Standard (WATTS) |
| 80.0 | > 250 | 348.0 | 0.8 | > 30 | 30.3 |
| 100.0 | > 250 | 335.0 | 1.0 | > 30 | 34.2 |
| 200.0 | > 250 | 340.0 | 1.5 | > 30 | 39.9 |
| 300.0 | > 250 | 329.0 | 2.0 | > 30 | 36.7 |
| 400.0 | > 250 | 324.0 | 2.5 | > 30 | 34.0 |
| 500.0 | > 250 | 282.0 | 3.0 | > 30 | 34.3 |
| 600.0 | > 250 | 318.0 | | | |
| 700.0 | > 250 | 329.0 | | | |
| 800.0 | > 250 | 306.0 | | | |
| 900.0 | > 250 | 294.0 | | | |
| 1000.0 | > 250 | 271.0 | | | |

Uncertainty: 3%

It has been demonstrated that the RS generator meets the specified requirements in the standard with at least a 95% confidence.

**Electrical Fast Transient/Burst Immunity (EFT/BURST)
Voltage**

| Impedance | Voltage Setting(V) | Expected (kV) | Actual (kV) | Uncertainty (%) | T1 | Uncertainty (%) | T2 | Uncertainty (%) |
|-----------|--------------------|---------------|-------------|-----------------|------|-----------------|-------|-----------------|
| 50Ω | 500 | 250 | 253 | 8.2 | 5.39 | 4.4 | 46.49 | 4.4 |
| 50Ω | 1000 | 500 | 504 | 8.2 | 5.7 | 4.4 | 45.98 | 4.4 |
| 50Ω | 2000 | 1000 | 971 | 8.2 | 5.57 | 4.4 | 44.89 | 4.4 |
| 50Ω | 4000 | 2000 | 1972 | 8.2 | 5.38 | 4.4 | 46.07 | 4.4 |
| 50Ω | -500 | -250 | -248 | 8.2 | 4.66 | 4.4 | 88.31 | 4.4 |
| 50Ω | -1000 | -500 | -496 | 8.2 | 5.23 | 4.4 | 86.25 | 4.4 |
| 50Ω | -2000 | -1000 | -962 | 8.1 | 5.11 | 4.4 | 85.48 | 4.4 |
| 50Ω | -4000 | -2000 | -1960 | 8.2 | 5.04 | 4.4 | 87.83 | 4.4 |
| 1kΩ | 500 | 500 | 476 | 8.2 | 5.81 | 4.4 | 87.87 | 4.4 |
| 1kΩ | 1000 | 1000 | 933 | 8.2 | 5.42 | 4.4 | 88.38 | 4.4 |
| 1kΩ | 2000 | 2000 | 1814 | 8.2 | 5.35 | 4.4 | 89.78 | 4.4 |
| 1kΩ | 4000 | 4000 | 3674 | 8.2 | 5.98 | 4.4 | 85.91 | 4.4 |
| 1kΩ | -500 | -500 | -460 | 8.2 | 6.03 | 4.4 | 37.78 | 4.4 |
| 1kΩ | -1000 | -1000 | -918 | 8.2 | 6.24 | 4.4 | 36.86 | 4.4 |
| 1kΩ | -2000 | -2000 | -1777 | 8.2 | 6.16 | 4.4 | 37.23 | 4.4 |
| 1kΩ | -4000 | -4000 | -3599 | 8.2 | 6.42 | 4.4 | 37.53 | 4.4 |

EFT Repetition Frequency (Voltage @ 1 kV)

| Setting (kHz) | Actual (kHz) | Uncertainty (%) | Tolerance (%) |
|---------------|--------------|-----------------|---------------|
| 5 | 5 | 4.4 | 20% |
| 100 | 100.01 | 4.4 | 20% |

Burst Duration (Voltage @ 1 kV)

| Setting (ms) | Repetition Freq. (kHz) | Actual (ms) | Uncertainty (%) | Tolerance (%) |
|--------------|------------------------|-------------|-----------------|---------------|
| 15 | 5 | 14.82 | 4.4 | 20% |
| 0.75 | 100 | 0.74 | 4.5 | 20% |

Burst Period (Voltage @ 1 kV)

| Setting (ms) | Repetition Freq. (kHz) | Actual (ms) | Uncertainty (%) | Tolerance (%) |
|--------------|------------------------|-------------|-----------------|---------------|
| 300 | 5 | 300 | 4.4 | 20% |
| 300 | 100 | 300 | 4.4 | 20% |

It has been demonstrated that the EFT/BURST generator meets the specified requirements in the standard with at least a 95% confidence.

Surge Immunity
Open Circuit Output Voltage Waveform check:

| Impedance | Voltage Setting(V) | Actual (kV) | Uncertainty (%) | T3 | Uncertainty (%) | T4 | Uncertainty (%) |
|-----------|--------------------|-------------|-----------------|-----|-----------------|------|-----------------|
| L-N 2Ω | 500.0 | 503.0 | 3.9 | 1.3 | 3.7 | 54.0 | 3.7 |
| L-N 2Ω | 4000.0 | 4020.0 | 3.9 | 1.2 | 3.7 | 51.2 | 3.7 |
| L-N 2Ω | -500.0 | -503.0 | 3.9 | 1.3 | 3.7 | 50.8 | 3.7 |
| L-N 2Ω | -4000.0 | -4068.0 | 3.9 | 1.1 | 3.7 | 50.3 | 3.7 |
| L-G 2Ω | 500.0 | 485.0 | 3.9 | 1.3 | 3.7 | 29.7 | 3.7 |
| L-G 2Ω | 4000.0 | 3948.0 | 3.9 | 1.0 | 3.7 | 28.2 | 3.7 |
| L-G 2Ω | -500.0 | -480.0 | 3.9 | 1.3 | 3.7 | 28.3 | 3.7 |
| L-G 2Ω | -4000.0 | -3900.0 | 3.9 | 1.1 | 3.7 | 28.0 | 3.7 |
| N-G 2Ω | 500.0 | 490.0 | 3.9 | 1.3 | 3.7 | 29.5 | 3.7 |
| N-G 2Ω | 4000.0 | 3900.0 | 3.9 | 1.2 | 3.7 | 27.9 | 3.7 |
| N-G 2Ω | -500.0 | -478.0 | 3.9 | 1.3 | 3.7 | 28.4 | 3.7 |
| N-G 2Ω | -4000.0 | -3900.0 | 3.8 | 1.2 | 3.7 | 28.2 | 3.7 |
| Impulse | 500.0 | 511.0 | 3.9 | 1.5 | 3.7 | 53.4 | 3.7 |
| Impulse | 1000.0 | 1041.0 | 3.9 | 1.3 | 3.7 | 51.9 | 3.7 |
| Impulse | 2000.0 | 2022.0 | 3.9 | 1.2 | 3.8 | 53.3 | 3.7 |
| Impulse | 4000.0 | 4044.0 | 3.9 | 1.3 | 3.6 | 53.3 | 3.7 |
| Impulse | -500.0 | -503.0 | 3.9 | 1.5 | 3.7 | 52.6 | 3.7 |
| Impulse | -1000.0 | -1023.0 | 3.9 | 1.3 | 3.7 | 51.9 | 3.7 |
| Impulse | -2000.0 | -2022.0 | 3.9 | 1.2 | 3.7 | 51.4 | 3.7 |
| Impulse | -4000.0 | -4044.0 | 3.9 | 1.3 | 3.7 | 51.4 | 3.7 |

Short Circuit Output Voltage Waveform check:

| Impedance | Voltage Setting(V) | Actual (kV) | Uncertainty (%) | T5 | Uncertainty (%) | T6 | Uncertainty (%) |
|-----------|--------------------|-------------|-----------------|-----|-----------------|------|-----------------|
| L-N 2Ω | 500.0 | 231.0 | 2.5 | 7.7 | 2.1 | 19.6 | 2.1 |
| L-N 2Ω | 4000.0 | 1854.0 | 2.5 | 7.4 | 2.1 | 19.9 | 2.1 |
| L-N 2Ω | -500.0 | -228.0 | 2.5 | 7.7 | 2.1 | 19.8 | 2.1 |
| L-N 2Ω | -4000.0 | -1818.0 | 2.5 | 7.6 | 2.1 | 19.9 | 2.1 |
| L-G 2Ω | 500.0 | 42.0 | 3.0 | 2.6 | 2.1 | 25.3 | 2.1 |
| L-G 2Ω | 4000.0 | 326.0 | 2.5 | 2.5 | 2.1 | 25.1 | 2.1 |
| L-G 2Ω | -500.0 | -42.0 | 2.8 | 2.6 | 2.1 | 25.0 | 2.1 |
| L-G 2Ω | -4000.0 | -337.0 | 2.5 | 2.4 | 2.1 | 25.0 | 2.1 |
| N-G 2Ω | 500.0 | 41.0 | 3.0 | 2.8 | 2.1 | 26.4 | 2.1 |
| N-G 2Ω | 4000.0 | 325.0 | 2.5 | 2.7 | 2.1 | 25.9 | 2.1 |
| N-G 2Ω | -500.0 | -41.0 | 2.7 | 2.9 | 2.1 | 26.1 | 2.1 |
| N-G 2Ω | -4000.0 | -323.0 | 2.5 | 2.6 | 2.1 | 25.8 | 2.1 |
| Impulse | 500.0 | 243.0 | 2.5 | 6.8 | 2.1 | 22.2 | 2.1 |
| Impulse | 1000.0 | 494.0 | 2.5 | 6.9 | 2.1 | 22.3 | 2.1 |
| Impulse | 2000.0 | 999.0 | 2.5 | 6.8 | 2.1 | 22.3 | 2.1 |
| Impulse | 4000.0 | 2022.0 | 2.5 | 7.1 | 2.1 | 22.3 | 2.1 |
| Impulse | -500.0 | -251.0 | 2.5 | 7.2 | 2.1 | 22.6 | 2.1 |
| Impulse | -1000.0 | -497.0 | 2.5 | 7.0 | 2.1 | 22.3 | 2.1 |
| Impulse | -2000.0 | -987.0 | 2.5 | 6.9 | 2.1 | 22.3 | 2.1 |
| Impulse | -4000.0 | -1986.0 | 2.5 | 7.0 | 2.1 | 22.4 | 2.1 |

It has been demonstrated that the Surge generator meets the specified requirements in the standard with at least a 95% confidence.

Conducted Disturbances Induced by Radio-Frequency Field Immunity (CS)

| RF Frequency Measurement Check | | RF Generator Second Harmonic Check |
|--------------------------------|-----------------|------------------------------------|
| Reading | Standard | Harmonic (dBc) |
| 9.000 kHz | 8.99997282 kHz | -45.6 |
| 50.000 kHz | 49.998570 kHz | -42.3 |
| 100.000 kHz | 99.9997118 kHz | -43.5 |
| 1.000000 MHz | 0.999997073 MHz | -45.6 |
| 5.000000 MHz | 4.99998552 MHz | -47.8 |
| 10.000000 MHz | 9.99997043 MHz | -48.4 |
| 50.000000 MHz | 49.9998556 MHz | -47.1 |
| 100.000000 MHz | 99.9997100 MHz | -46.2 |
| 500.000000 MHz | 499.998548 MHz | -49.9 |
| 1000.000000 MHz | 999.997093 MHz | -52.6 |

| RF Generator AM Modulation Measurement Check (1 kHz ; 80 %) | | | |
|---|------------|---------|----------|
| Frequency | Mod. Freq. | Reading | Standard |
| 100.000 kHz | 1 kHz | 80.0% | 81.4% |
| 1.000000 MHz | 1 kHz | 80.0% | 81.3% |
| 5.000000 MHz | 1 kHz | 80.0% | 81.2% |
| 10.000000 MHz | 1 kHz | 80.0% | 81.1% |
| 50.000000 MHz | 1 kHz | 80.0% | 81.3% |
| 100.000000 MHz | 1 kHz | 80.0% | 81.1% |
| 500.000000 MHz | 1 kHz | 80.0% | 81.5% |
| 1000.000000 MHz | 1 kHz | 80.0% | 80.8% |

| RF Generator Response and Accuracy Measurement Check | | |
|--|---------------|----------------|
| Frequency | Reading (dBm) | Standard (dBm) |
| 9.000 kHz | 0 | -43.0 |
| 50.000 kHz | 0 | 0.0 |
| 100.000 kHz | 0 | -0.1 |
| 1.000000 MHz | 0 | 0.1 |
| 5.000000 MHz | 0 | 0.1 |
| 10.000000 MHz | 0 | 0.1 |
| 50.000000 MHz | 0 | -0.2 |
| 50.000000 MHz | -10 | -10.2 |
| 50.000000 MHz | -20 | -20.3 |
| 50.000000 MHz | -30 | -30.3 |
| 50.000000 MHz | -40 | -40.3 |
| 50.000000 MHz | -50 | -50.3 |
| 100.000000 MHz | 0 | 0.1 |
| 500.000000 MHz | 0 | 0.0 |
| 1000.000000 MHz | 0 | -0.3 |

| RF Power Meter Measurement Check | | | |
|----------------------------------|----|----------------|---------------|
| Frequency (MHz) | | Standard (dBm) | Reading (dBm) |
| CH 1 | 50 | 10 | 9.7 |
| CH 1 | 50 | 0 | -0.3 |
| CH 1 | 50 | -10 | -10.3 |
| CH 1 | 50 | -15 | -15.3 |
| CH 2 | 50 | 10 | 9.7 |
| CH 2 | 50 | 0 | -0.3 |
| CH 2 | 50 | -10 | -10.3 |
| CH 2 | 50 | -15 | -15.3 |
| CH 3 | 50 | 10 | 9.7 |
| CH 3 | 50 | 0 | -0.4 |
| CH 3 | 50 | -10 | -10.3 |
| CH 3 | 50 | -15 | -15.3 |

| Power Amplifier Gain Flatness Measurement | | Power Amplifier Standard Measurement (Input: 10 dBm) | | Power Amplifier Second Harmonic Measurement Check |
|---|--------------|--|-------------|---|
| Frequency | Reading (dB) | Result (dBm) | Spec. (dBm) | Reading (dBc) |
| 150.000 kHz | 50.1 | 48.1 | > 44.77 | -48.6 |
| 1.000000 MHz | 51.2 | 48.3 | > 44.77 | -47.8 |
| 5.000000 MHz | 51.2 | 48.4 | > 44.77 | -53.6 |
| 10.000000 MHz | 51.1 | 48.4 | > 44.77 | -48.7 |
| 50.000000 MHz | 50.4 | 48.4 | > 44.77 | -49.2 |
| 100.000000 MHz | 49.6 | 48.2 | > 44.77 | -44.7 |
| 200.000000 MHz | 49.4 | 47.0 | > 44.77 | -54.3 |
| 2300.000000 MHz | 49.6 | 46.4 | > 44.77 | -57.5 |

Uncertainty: Frequency: 1.9×10^{-9}

Linear: 0.9 dB

RF Power Level: 1.2 dB

Harmonic: 2.0 dB

It has been demonstrated that the CS generator meets the specified requirements in the standard with at least a 95% confidence.

Power Frequency Magnetic Field Immunity
AC Current Accuracy Check

| Freq.(Hz) | Range (A) | Standard (A) | Reading (A) | Uncertainty (%) |
|-------------|-----------|--------------|-------------|-----------------|
| 50 | 0~10 | 1.003 | 1 | 0.3 |
| 50 | 0~10 | 3.002 | 3 | 0.3 |
| 50 | 0~10 | 5.006 | 5 | 0.3 |
| 50 | 0~10 | 10.008 | 10 | 0.3 |
| 50 | 10~125 | 9.92 | 10 | 0.3 |
| 50 | 10~125 | 30.01 | 30 | 0.3 |
| 50 | 10~125 | 50.08 | 50 | 0.3 |
| 50 | 10~125 | 100.2 | 100 | 0.3 |
| 60 | 0~10 | 0.989 | 1 | 0.3 |
| 60 | 0~10 | 2.985 | 3 | 0.3 |
| 60 | 0~10 | 4.988 | 5 | 0.3 |
| 60 | 0~10 | 9.982 | 10 | 0.3 |
| 60 | 10~125 | 9.89 | 10 | 0.3 |
| 60 | 10~125 | 29.92 | 30 | 0.3 |
| 60 | 10~125 | 49.93 | 50 | 0.3 |
| 60 | 10~125 | 100.03 | 100 | 0.3 |

Magnetic Measurement Check : (@50Hz)

| Range (A) | Standard (A/m) | Reading (A) | Uncertainty (%) |
|-----------|----------------|-------------|-----------------|
| 0~10 | 1 | 1.0 | 1 |
| 0~10 | 3 | 3.2 | 1 |
| 0~10 | 10 | 10.8 | 1 |
| 10~125 | 10 | 11.1 | 1 |
| 10~125 | 30 | 33.1 | 1 |
| 10~125 | 100 | 109.8 | 1 |

It has been demonstrated that the PFMF the specified requirements in the standard with at least a 95% confidence.

Voltage Dips and Voltage Interruptions Immunity**PQF Measurement: (Input Voltage: 230V/50Hz)**

| Level | Load | Actual (V) | Uncertainty (mV/V) | Tolerance (%) |
|-------|------|--------------|----------------------|---------------|
| 80% | 100Ω | 182.5 | 17 | 184 +/- 5% |
| 70% | 100Ω | 161.7 | 17 | 161 +/- 5% |
| 40% | 100Ω | 93.2 | 17 | 92 +/- 5% |
| 0% | 100Ω | 5.3 | 17 | - |

VAR Check: (Input Voltage: 230V/50Hz)

| Level | Load | Actual (V) | Uncertainty (mV/V) | Tolerance (%) |
|-------|------|--------------|----------------------|---------------|
| 80% | 100Ω | 182.5 | 17 | 184 +/- 5% |
| 70% | 100Ω | 161.7 | 17 | 161 +/- 5% |
| 40% | 100Ω | 93.2 | 17 | 92 +/- 5% |
| 0% | 100Ω | 5.3 | 17 | - |

It has been demonstrated that the Dip generator meets the specified requirements in the standard with at least a 95% confidence.

Appendix A. Test Photos

1. Photographs of Conducted Emissions Test Configuration

Test Mode: Mode 1

FRONT VIEW



REAR VIEW



Test Mode: Mode 4

FRONT VIEW



REAR VIEW



2. Photographs of Telecommunication Line Conducted Emissions Test Configuration

Test Mode: Mode 1 and Mode 2

FRONT VIEW



REAR VIEW



Test Mode: Mode 3

FRONT VIEW



REAR VIEW




Test Mode: Mode 6 and Mode 7

FRONT VIEW



REAR VIEW

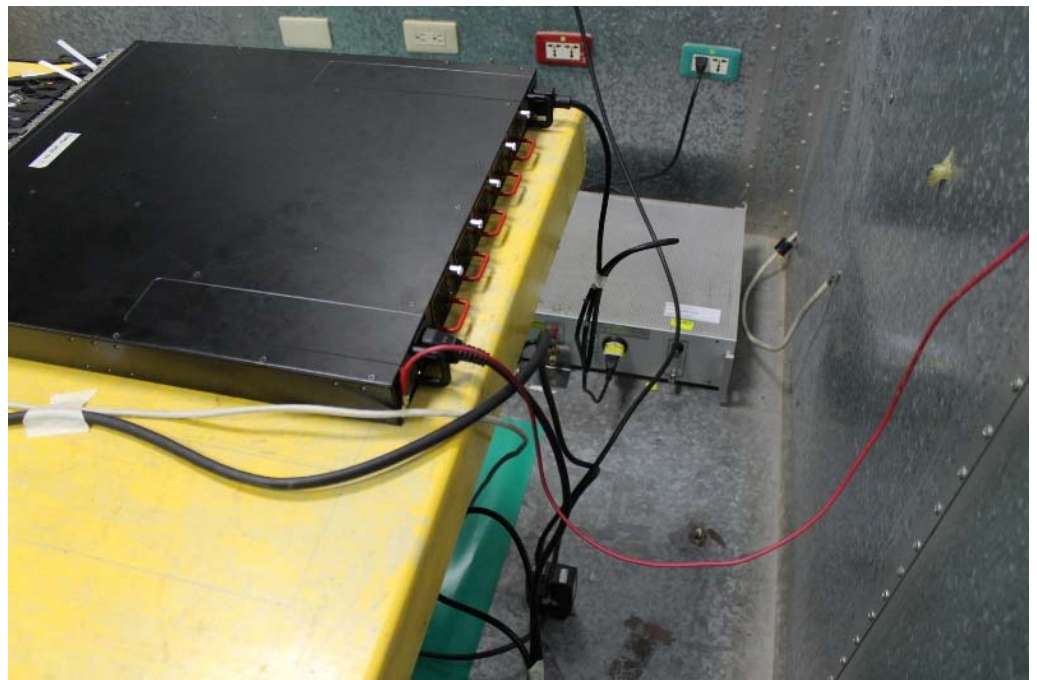

Test Mode: Mode 8

FRONT VIEW




REAR VIEW




3. Photographs of Radiated Emissions Test Configuration

Test Configuration: 30MHz~1GHz / Test Mode: Mode 1

FRONT VIEW

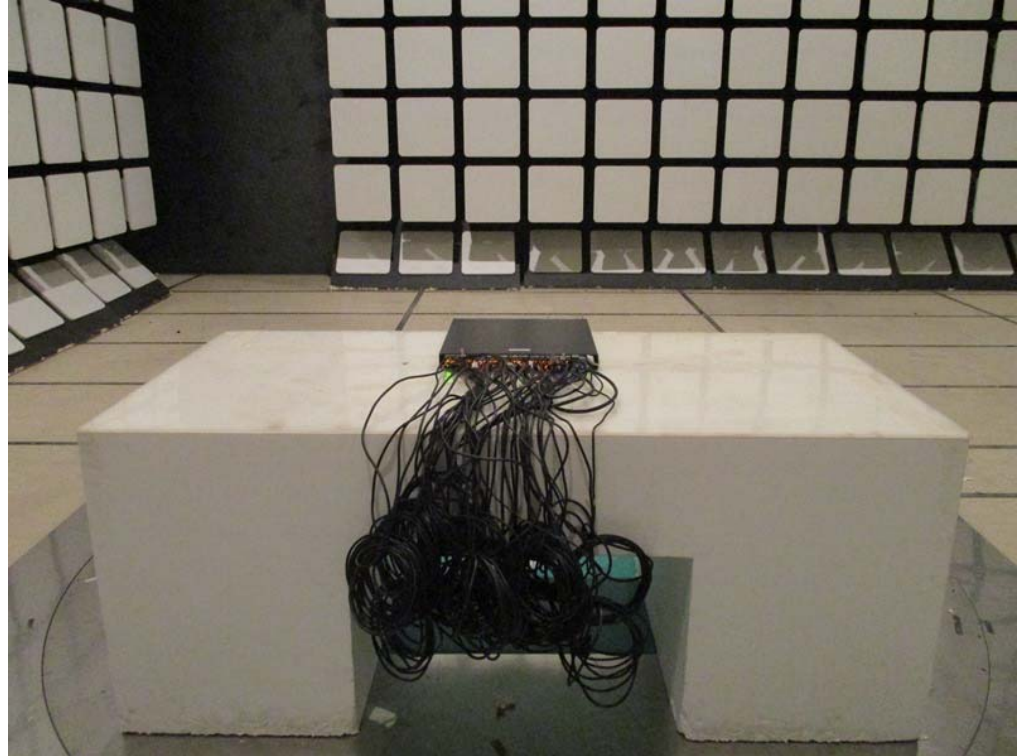


REAR VIEW

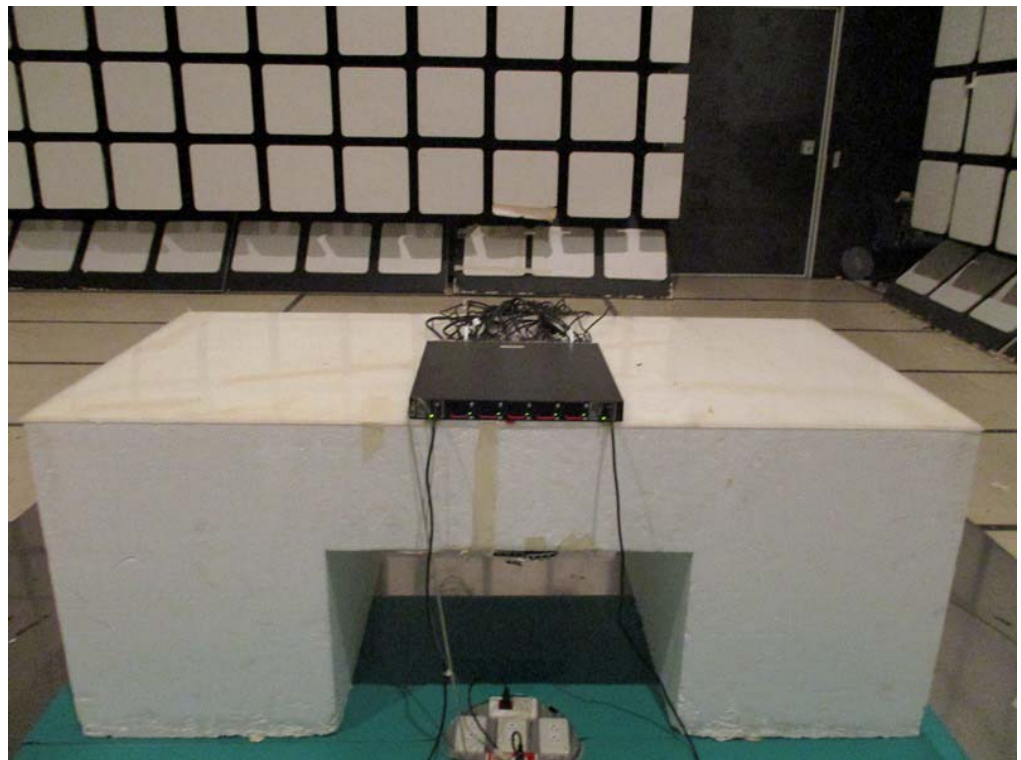


Test Configuration: 30MHz~1GHz / Test Mode: Mode 2

FRONT VIEW

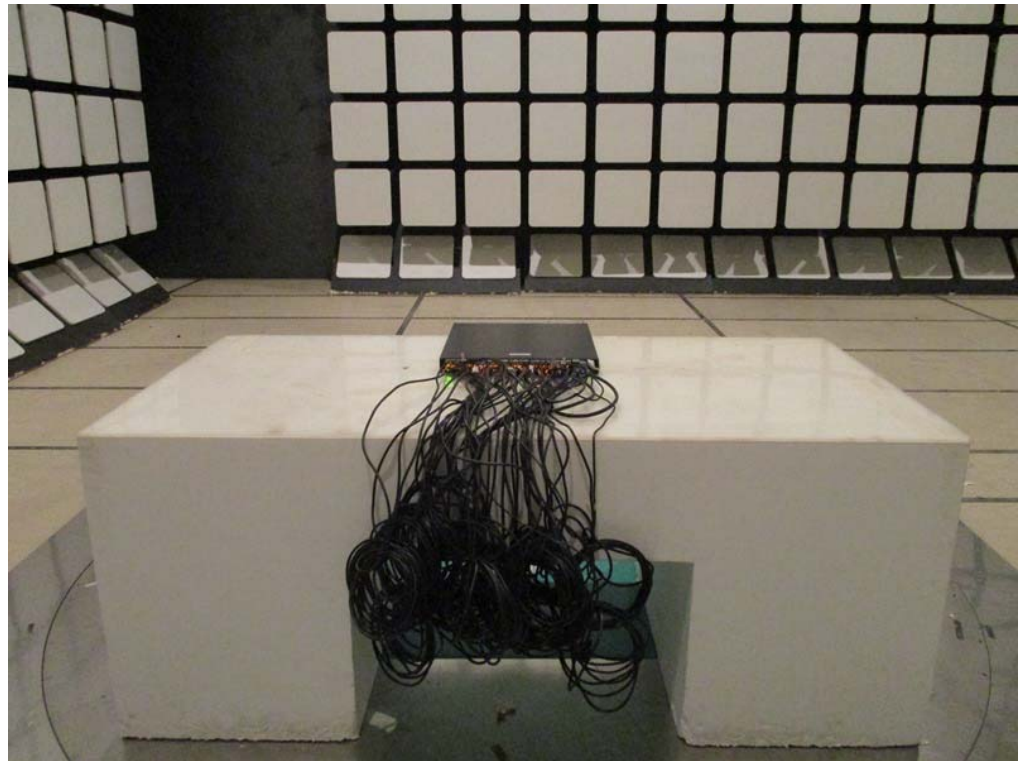


REAR VIEW

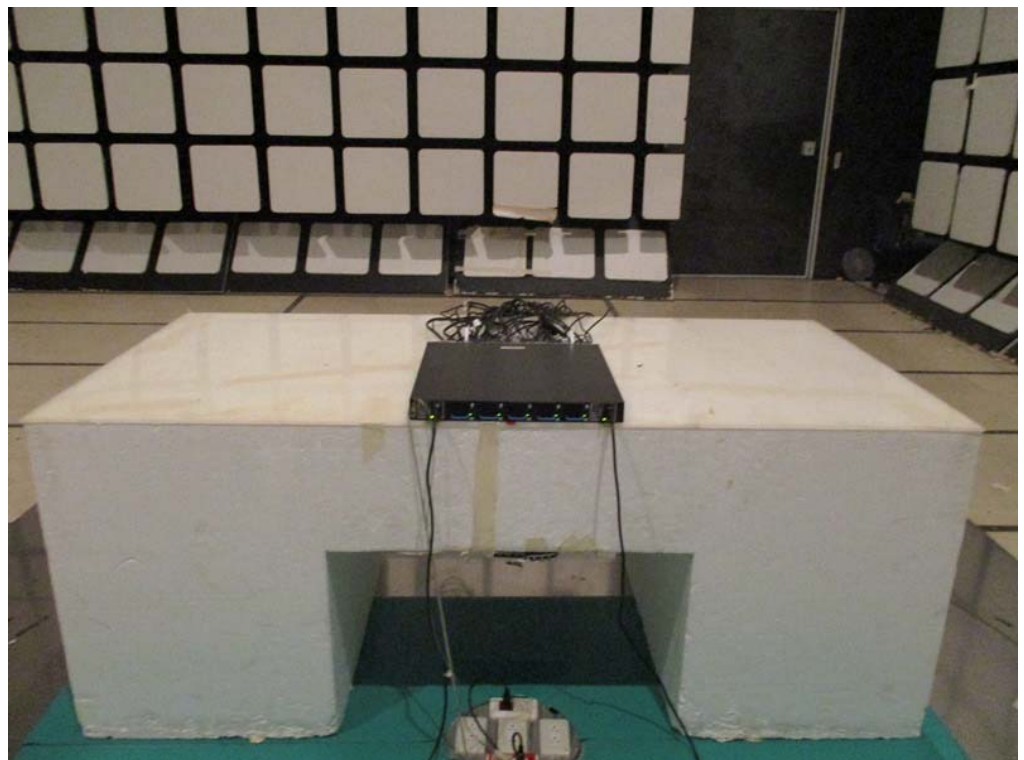


Test Configuration: Above 1GHz / Test Mode: Mode 2

FRONT VIEW

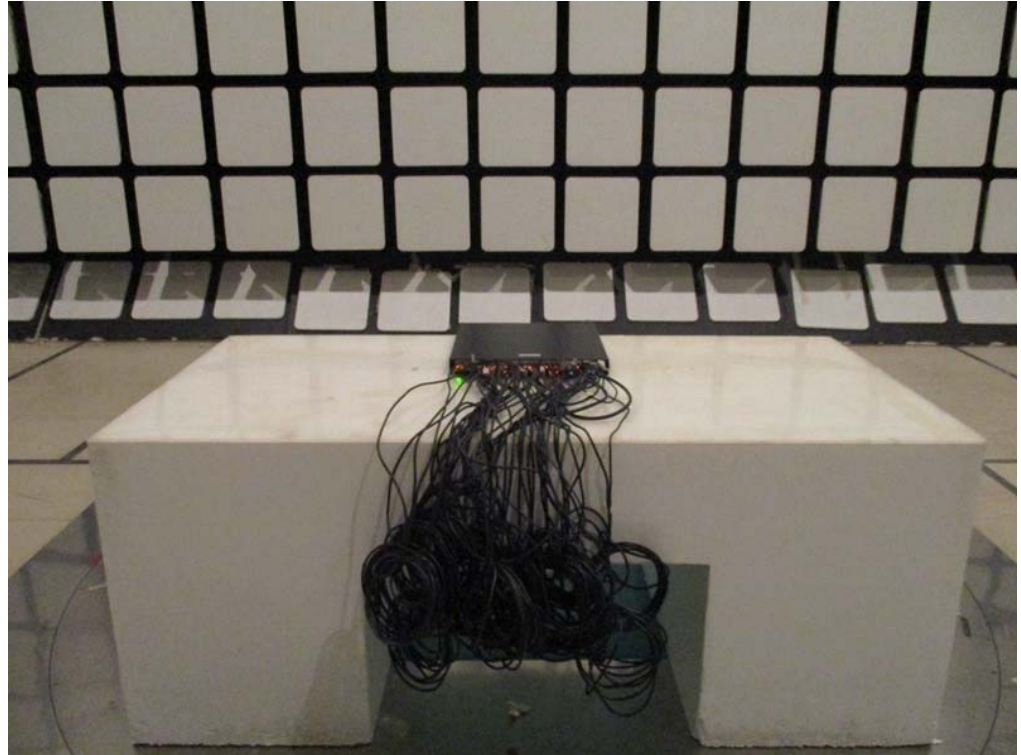


REAR VIEW

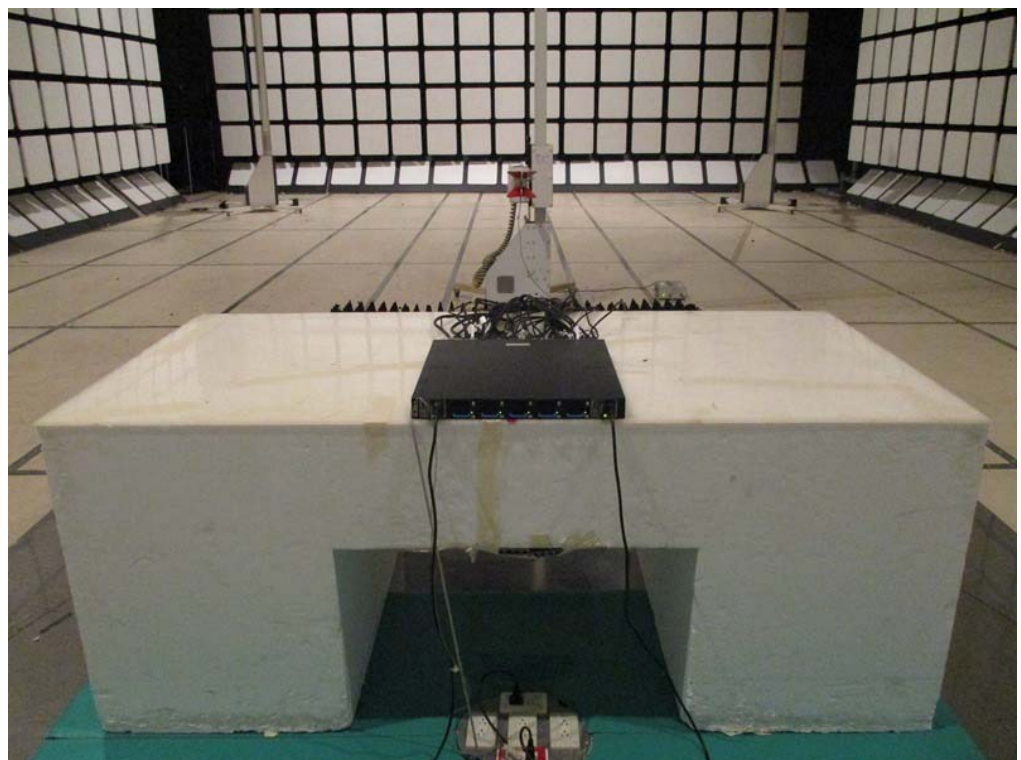


Test Configuration: Above 1GHz / Test Mode: Mode 3

FRONT VIEW

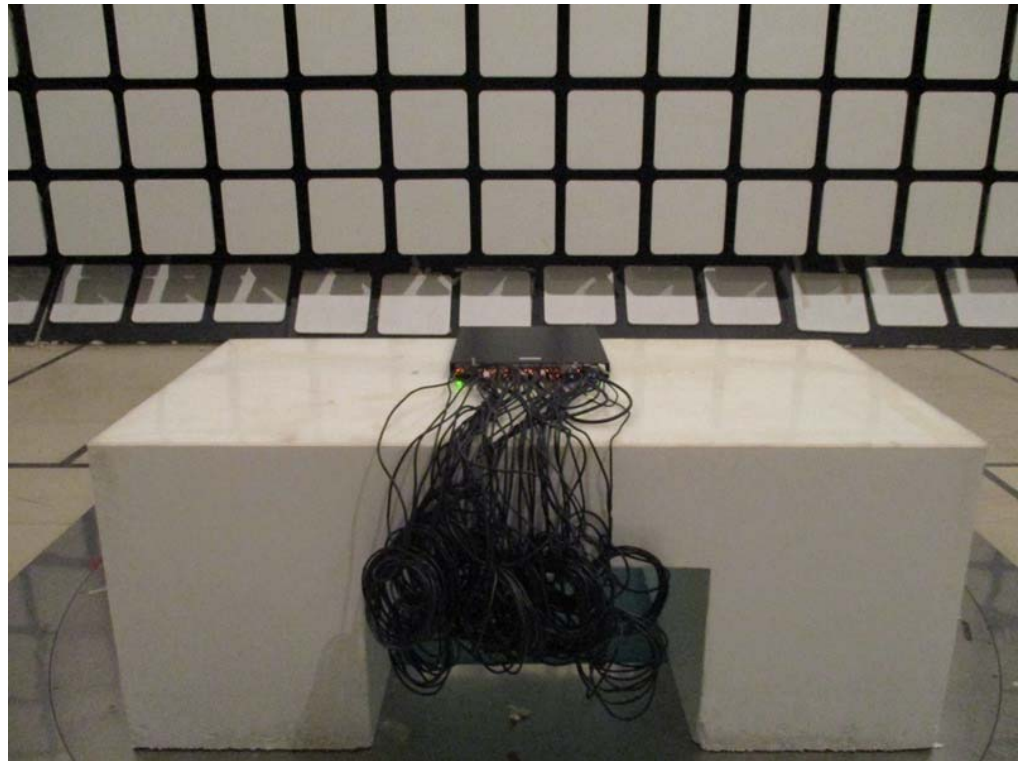

REAR VIEW

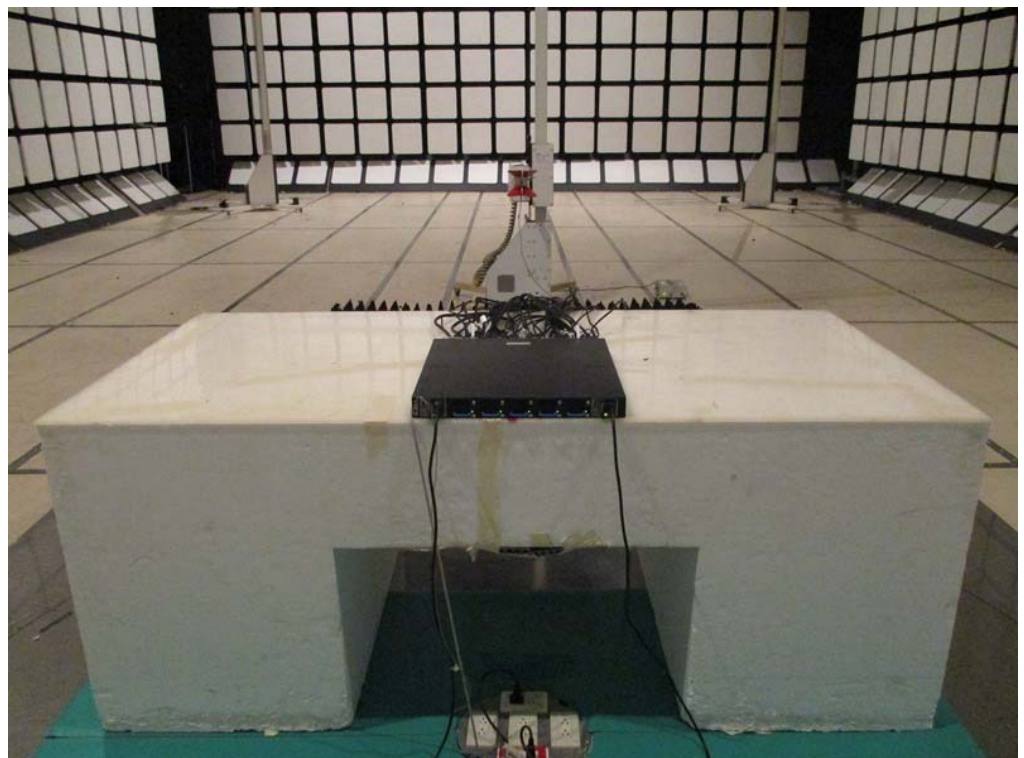

4. Photographs of Harmonic, Flicker Test Configuration

Test Mode: Mode 1

FRONT VIEW



Test Mode: Mode 2

FRONT VIEW



5. Photographs of ESD Immunity Test Configuration

Test Mode: Mode 1

FRONT VIEW



REAR VIEW



Test Mode: Mode 2

FRONT VIEW




REAR VIEW




6. Photographs of RS Immunity Test Configuration

Test Mode: Mode 1

FRONT VIEW

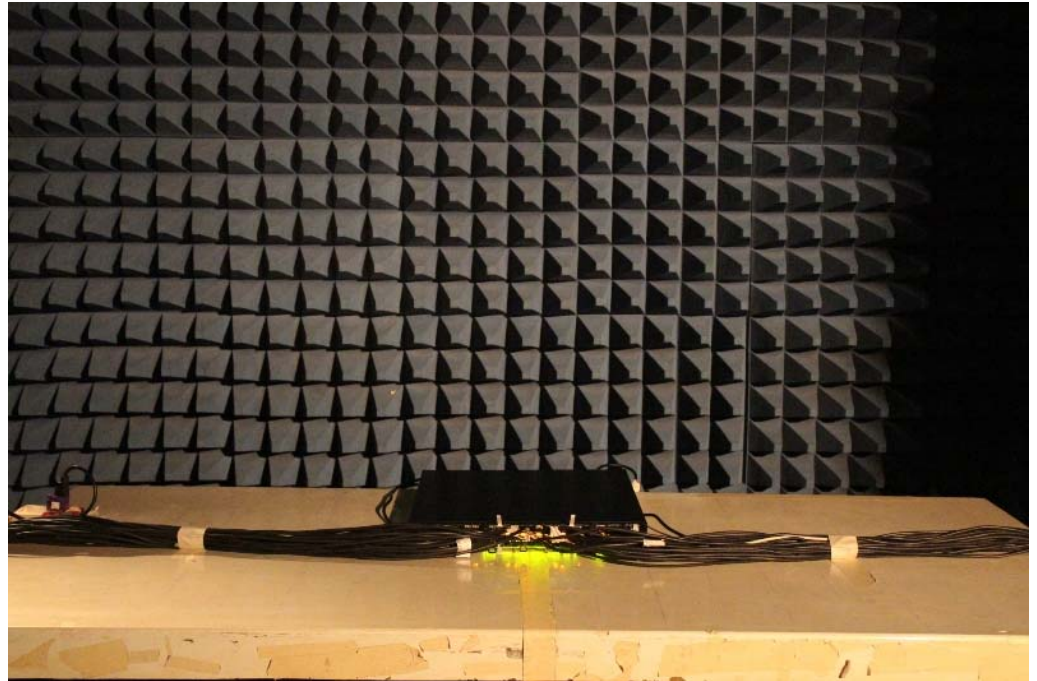


REAR VIEW

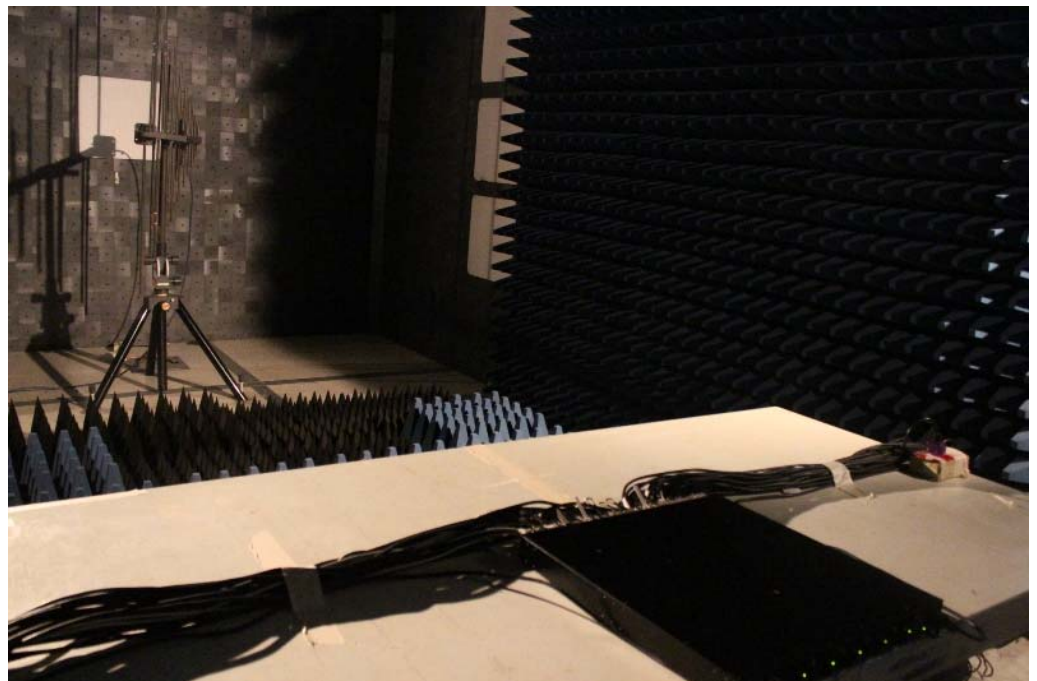


Test Mode: Mode 2

FRONT VIEW

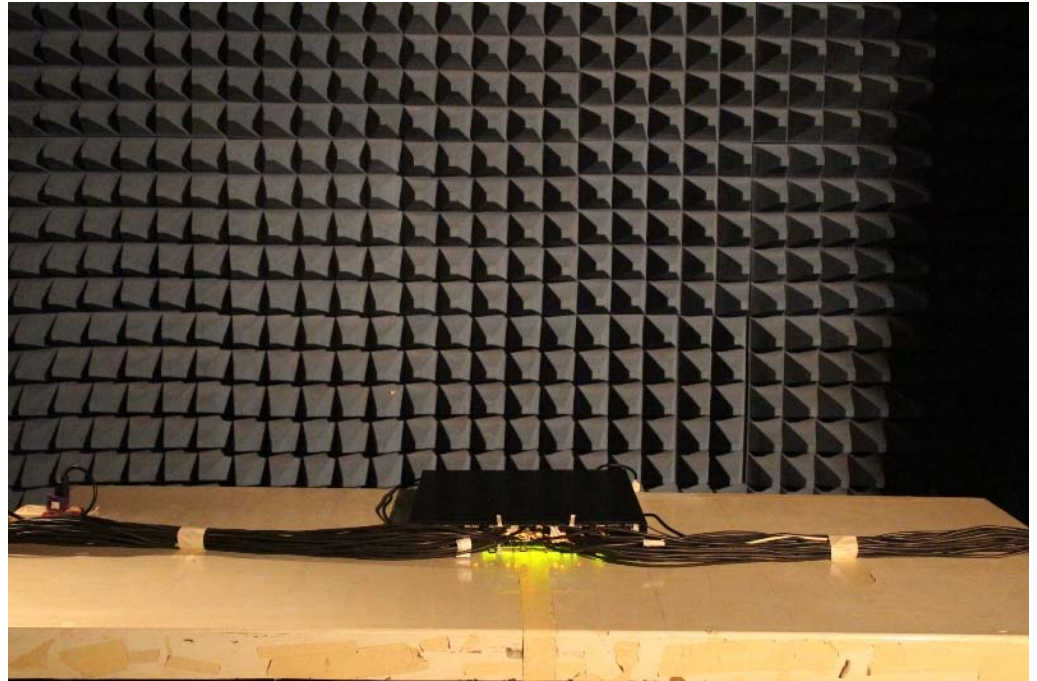

REAR VIEW

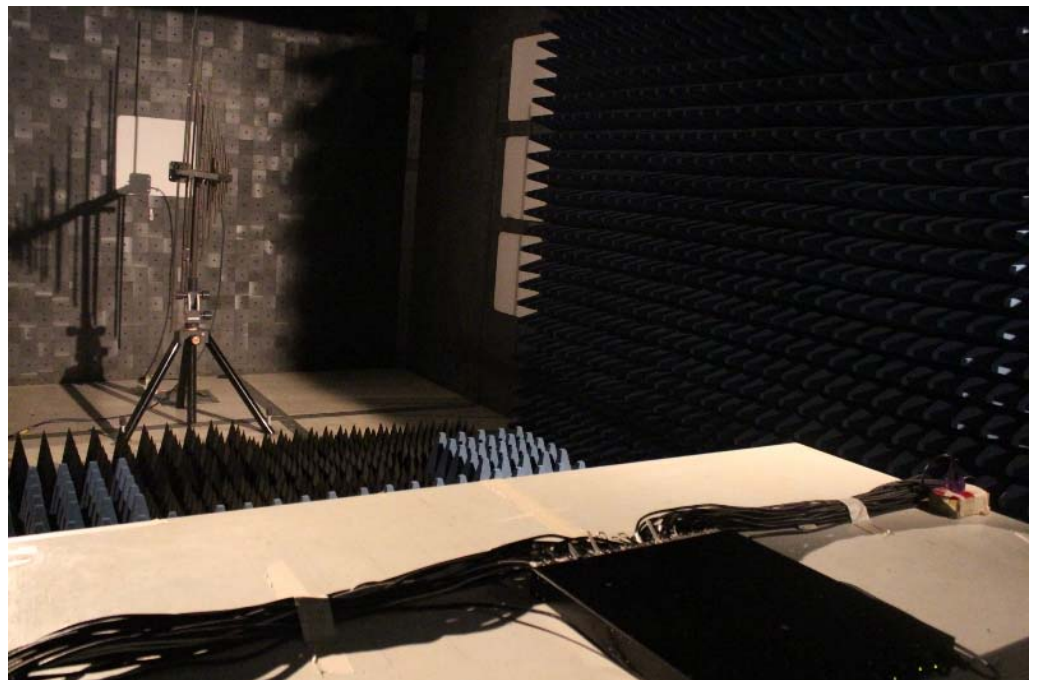

7. Photographs of EFT Test Configuration

Test Mode: Mode 1

FRONT VIEW



REAR VIEW



Test Mode: Mode 2

FRONT VIEW



REAR VIEW



Test Mode: Mode 3

FRONT VIEW



REAR VIEW



Test Mode: Mode 4

FRONT VIEW




REAR VIEW



8. Photographs of Surge Test Configuration


Test Mode: Mode 1~Mode 2

FRONT VIEW

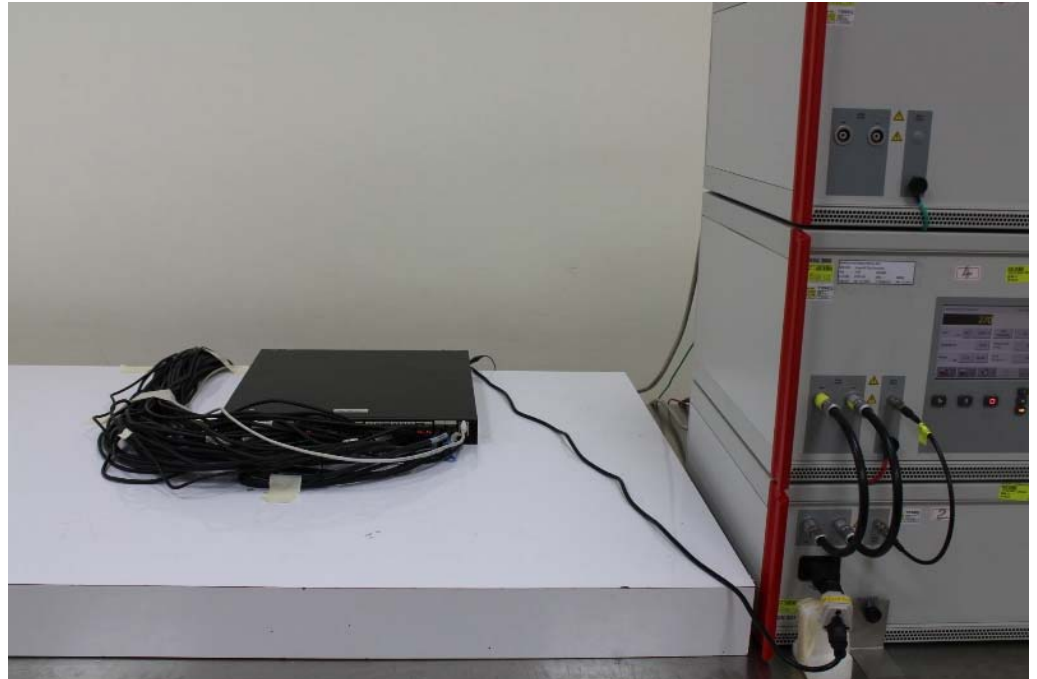

Test Mode: Mode 3~Mode 4

FRONT VIEW

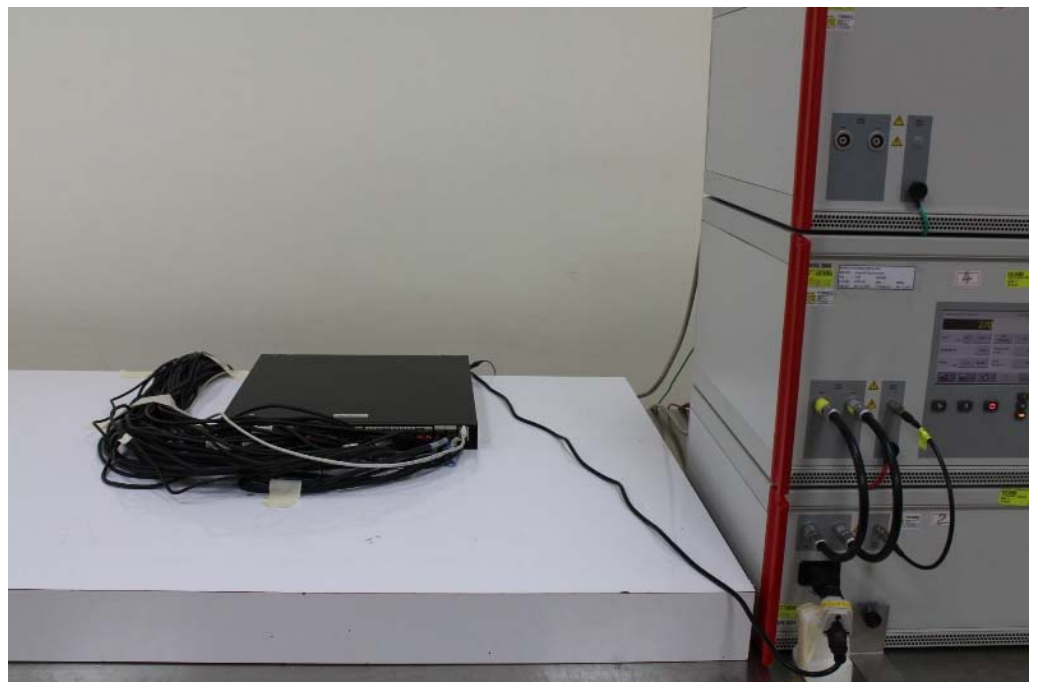

9. Photographs of CS Immunity Test Configuration

Test Mode: Mode 1

FRONT VIEW



REAR VIEW




Test Mode: Mode 2

FRONT VIEW



REAR VIEW

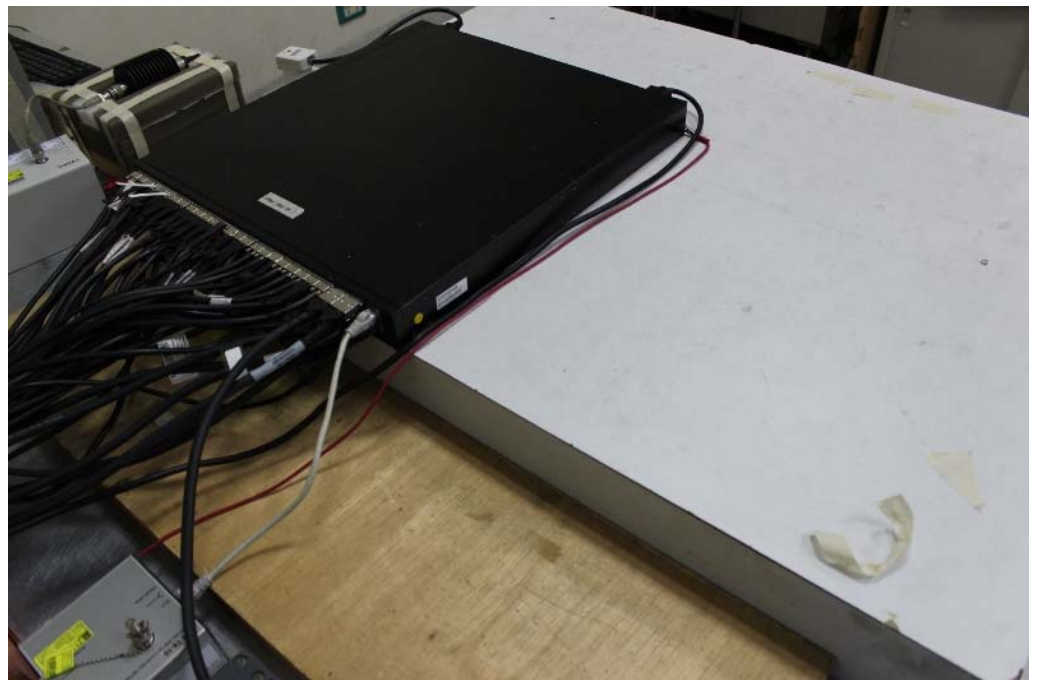

Test Mode: Mode 3

FRONT VIEW



REAR VIEW




Test Mode: Mode 4

FRONT VIEW



REAR VIEW

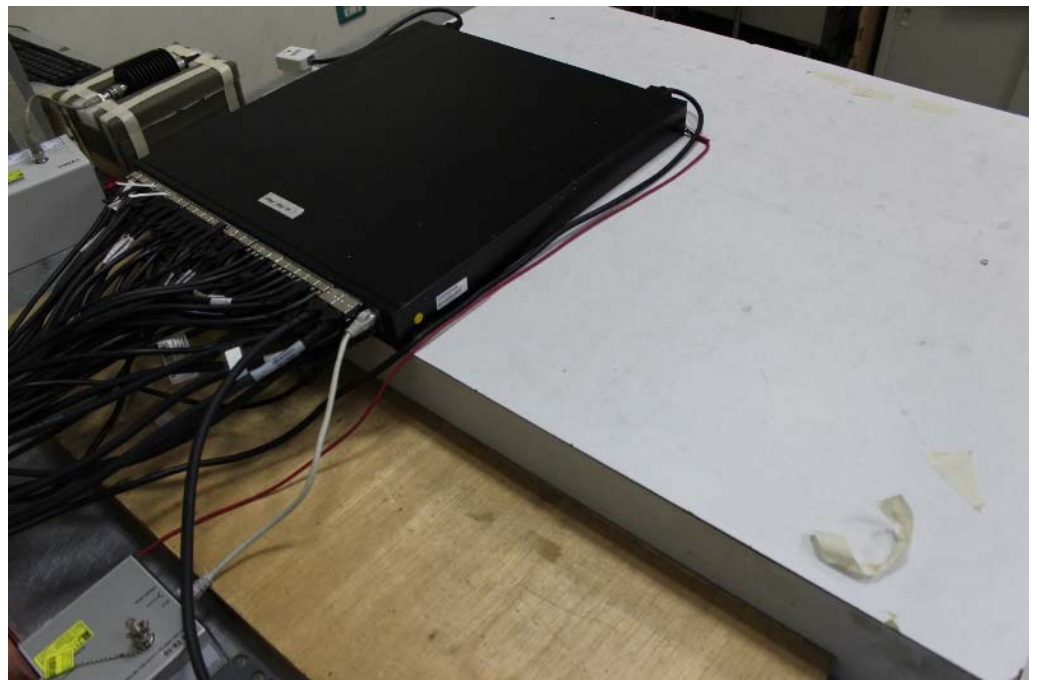

10. Photographs of MF Immunity Test Configuration


Test Mode: Mode 1

FRONT VIEW



Test Mode: Mode 2


FRONT VIEW

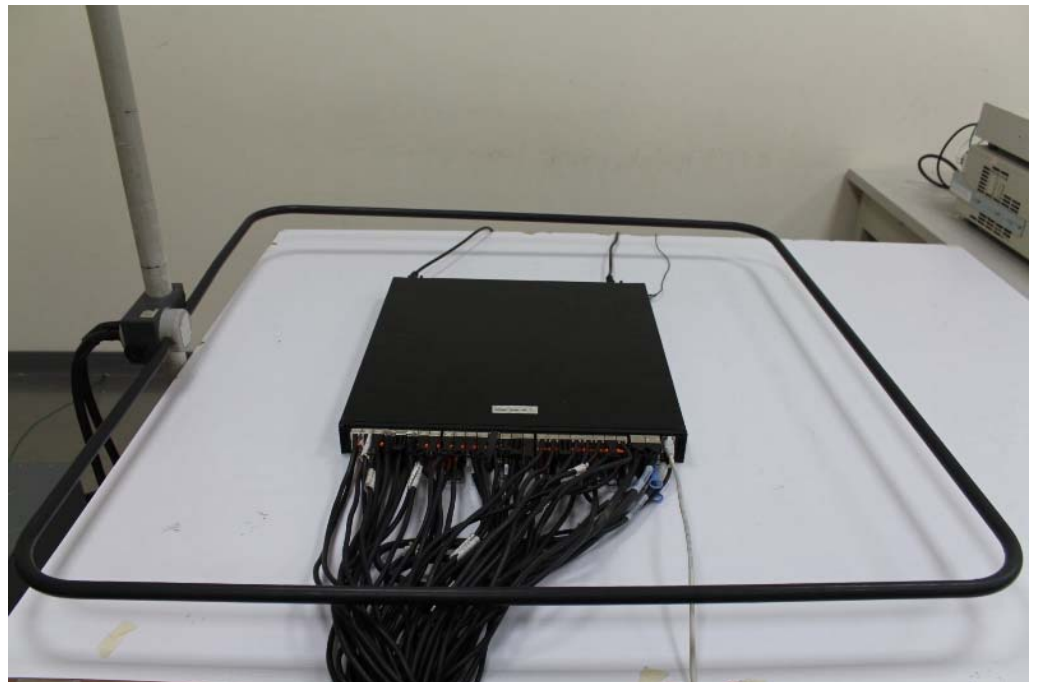

11. Photographs of DIP Test Configuration

Test Mode: Mode 1~Mode 2

FRONT VIEW

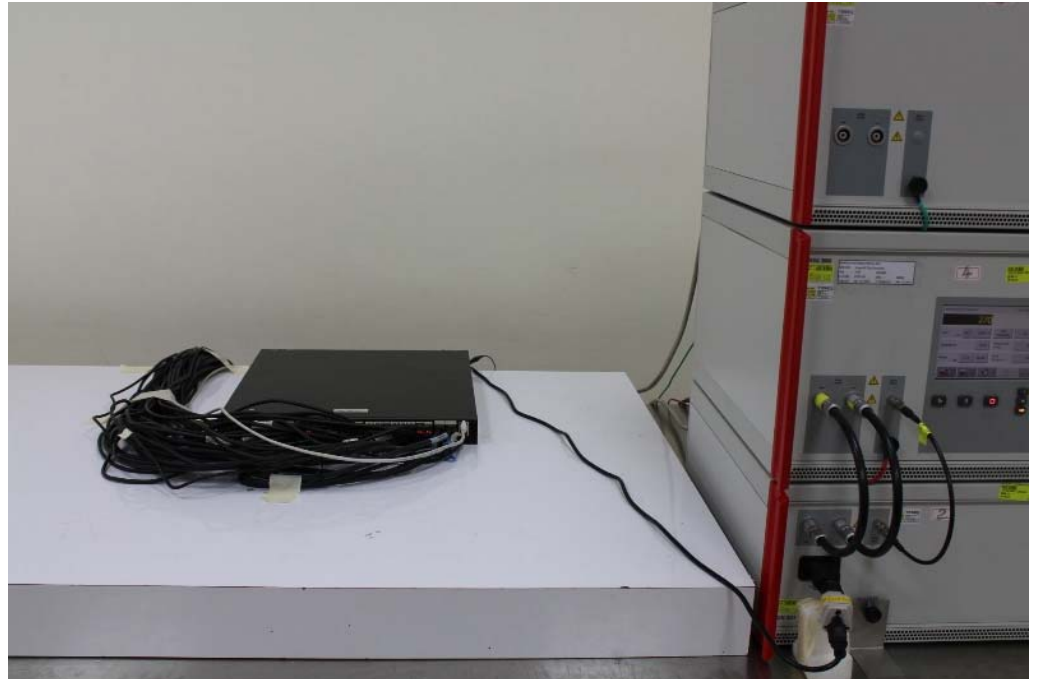

Test Mode: Mode 3~Mode 4

FRONT VIEW

